

2020 - 2021

LG BECON HVAC SOLUTION GUIDE

LG BECON HVAC SOLUTION GUIDE

2020 - 2021



LG Electronics

<http://www.lg.com>
<http://partner.lge.com>

Distributed by



BENEFITS OF LG BECON HVAC SOLUTION

Benefits for Building Owners



Efficient Management & Cost Reduction

- Fault Detection Diagnosis enables easy maintenance
- Requires no extra manpower for regular maintenance
- With diverse control systems, maintenance cost is minimized



Reliability at Every Stage

- Ultimate Inverter Compressor developed and manufactured in Korea
- Corrosion resistant Ocean Black Fin for harsh conditions operation
- Smart Oil management (Auto Oil balancing and Active Oil return) decreases compressor damage



Customized Comfort and Solution

- Compatible option between Heat pump and Heat recovery system is possible



Benefits for Developers & Construction Companies



Green Solutions

- Optimized for LEED / BREEAM certification
- Renewable energy solution provided through geothermal application



Maximizing Space Utilization

- Large capacity in compact size enhances space utilization



Smart Building Solutions

- Seamless integration with current Building Management Systems
- Wi-Fi control available for anytime, anywhere access (via the 'LG ThinQ' mobile app)
- Energy management and control according to usage and planning is possible with LG's centralized control solution



Benefits for Consultants



Versatile Solutions

- Air-Cooled, Water-Cooled, Heating, and Air Handling Unit interlocking solutions



Professional Design Support

- LATS (LG Air conditioner Technical Solution) for draft energy estimation, model selection, HVAC design and 3D designing
- CFD Analysis to ensure suitable solutions and prevent malfunctions
- Energy simulation offered to find the optimal solution



Optimized Convenience with HVAC Design

- Flexible and longer piping length facilitates HVAC designing process
- Meets any type of customer requirements of diverse environment, design conditions, and building applications



Benefits for End-users



Minimizing your Operation Costs

- Excellent cost savings through energy saving solutions : Energy Management, Schedule Control, Time Limit, Group Control



Smart Management

- Intuitive control and monitoring provides a more comfortable environment with smart management functions.
- Air purify solution keeps providing clean air : Air Purify Control, Air Quality Level, Visual Navigation, Operation Trend, Comfort Level Display



Expandability

- Without additional device, AC Smart 5 / ACP 5 provides BACnet IP & Modbus TCP interface for BMS integration as well as its own management function
- Interlocking with 3rd party equipment



The perfect choice for innovative building management

LG BECON HVAC SOLUTION

Innovative building management solution in your hands.

Our optimized solutions provide integrated control for customers configuration of various equipment in building and intuitive interface to maximize efficiency of operations.



ENERGY SAVING



SMART MANAGEMENT



EASY EXPANDABILITY

SMART MANAGEMENT



Standard III Remote Controller



Premium Remote Controller



Wi-Fi Modem (with LG ThinQ)

EASY EXPANDABILITY



Modbus Gateway



ACP LonWorks



Dry Contact



ACP 5



ACS IO Module



ACU IO Module

ENERGY SAVING



PDI



AC Smart 5



AC Manager 5



AC Ez Touch



KEY BENEFITS



Energy Saving

LG BECON HVAC SOLUTION prevents energy waste through energy reduction solutions optimized for a variety of business environments, providing excellent cost reduction.



Energy Management
(Usage Graph & Navigation)



Capacity Control



Time Limit



Pre-Cooling and Heating



Smart Management

Comfort and convenience play a major factor in the effectiveness of an HVAC Control Solution. We provides smart management with control and monitoring, as well as a more pleasant environment through an air purify solution anytime anywhere.



Air Purify Solution



Environment Display
(Temperature, Humidity, CO₂, Air Quality Level)



User Friendly Interface



Visual Navigation



IPv6 Network
(HTML5)



Operation Trend View & Energy Report



Easy Expandability

Integrated management of LG HVAC Control Solution links operations of LG Air conditioners with external systems for expanded coverage. The embedded BMS enables direct connection with other systems without any additional BMS gateways to enable communication. Units' operations (on / off, air flow adjustment, Etc) can be configured through triggers such as Air quality, humidity, CO₂, and room occupancy sensors. Also, 3rd Party Thermostat controllers are connectable with LG HVAC System.





BMS Protocol Embedded



Interlocking with 3rd Party Equipment

VARIOUS INTEGRATED SOLUTIONS



Retail

AC Ez Touch, PDI
Customized operation maintains the comfort of retail space




Hospitality

Dry Contact
Meeting diverse needs




Power Consumption Distribution Solution

In case of shared power consumption in a building, a solution to distribute the power consumption amount per tenant might be necessary. Electricity charges can be billed to each tenant by using output from the LG Power Distribution Indicator (PDI). An administrator is able to check the power usage for each space and date as needed. If the PDI is used in conjunction with an LG central controller, the results can be exported to Excel.

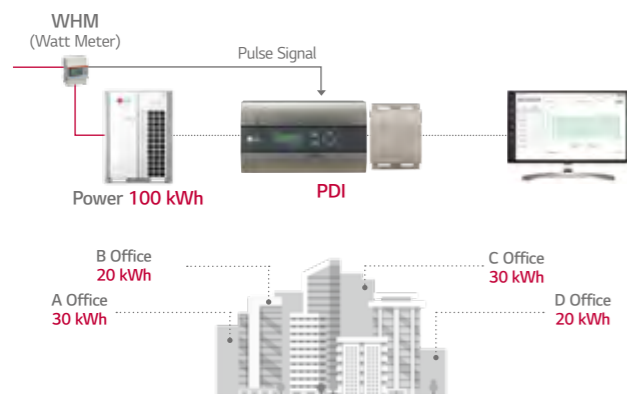

Energy Management Solution

Since HVAC systems use a significant portion of any building's total amount of energy, the energy saving functions of a controller can make a big difference. The energy navigation function enables you to set target values for energy consumption over a certain period of time. In addition, to achieve that value, the administrator can set the energy saving logic in 7 steps and predict the expected usage relative to the target value. Active self-management enables energy savings through out the building.

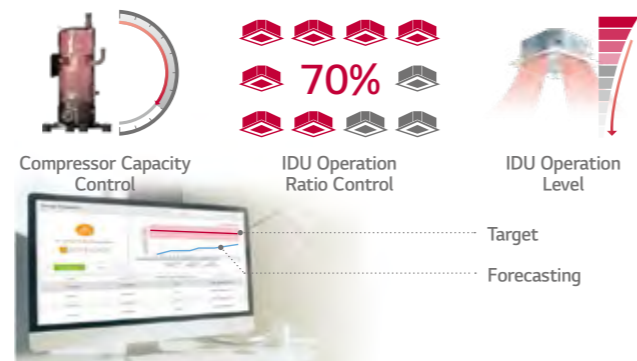


Refrigerant Leak Detection Solution

Real-time refrigerant leak detection ensures a safe environment. When refrigerant concentration exceeds 6,000ppm for 5 seconds, the indoor unit will stop operation and alert users with a buzzer or light switch (Dry contact option).




Interlocking Solution Using Dry Contact

3rd party thermostats can be used to control LG Air conditioners in a room by using a multi point dry contact. The dry contact enables basic control of air conditioners as well as making it possible to report the status and any errors impacting the indoor unit. The Standard III remote control has a DO port. With this DO port, it is possible to interlock the indoor unit with 3rd party devices such as lighting, a fan, or a radiator, based on things like operation mode or current temperature. The indoor unit can be interlocked with various types of input such as card key-tag, door sensor, human detection sensor etc. so that the air conditioner is automatically operated. In addition, the dry contact option settings enable operation of air conditioner to maintain proper temperature when the occupant is absent. This solution makes sure that the room does not overheat or become too cold when unoccupied so that energy cost can be saved.

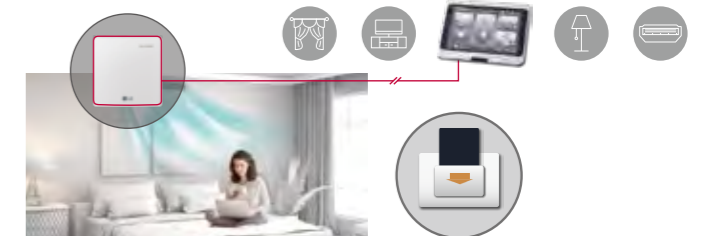

VARIOUS INTEGRATED SOLUTIONS



Residential

Standard III, Wi-Fi Modem
Creating a comfortable home




Office

AC Smart 5
Supporting efficiency with flexibility



Easy Control

Wired remote controller is easy for usage.

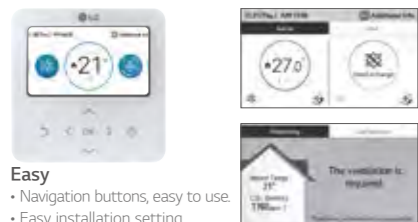

Easy
• Navigation buttons, easy to use.
• Easy installation setting

Convenient
• Flexible display
• Dual display with air conditioner
• Zoom selected directory to increase legibility.
Visible
• Indoor CO₂ level, Air Purify quality level, Humidity
• Alarm for filter change / Remained time to change filters

Air Purify Solution

Anywhere! Anytime! Control IDU with Wi-Fi Modem through LG ThinQ.

Air Quality Level Monitoring

- Easily Check Air Quality Status
 - PM10
 - PM2.5
 - PM1.0
- Graph View of measurement history Day, Week, Month, Year

Air Purify Control

- Air Purify Set / Clear



Mobile Remote Control

- Using a Wi-Fi modem, control and monitor air purify from your LG ThinQ App.
- Temp. / Mode / Fan / Air Flow and so on

* Wi-Fi modem (PWFMD200) is an accessory.




Energy Management

Users can check power consumption and running time report. (Weekly, Monthly, Yearly)
Various energy managing settings such as energy target setting, alarm pop-up indication, time limit control and home leave operation are available for efficient management.




Integration Solution with BMS

There are many BMS protocols used for the control of buildings' various systems such as HVAC, lighting, power and security. LG has a wide range of gateway products for different protocols such as BACnet, Modbus, and LonWorks. In addition, LG gateways include Stand-alone central control capability to act as a back-up controller of the BMS if needed.


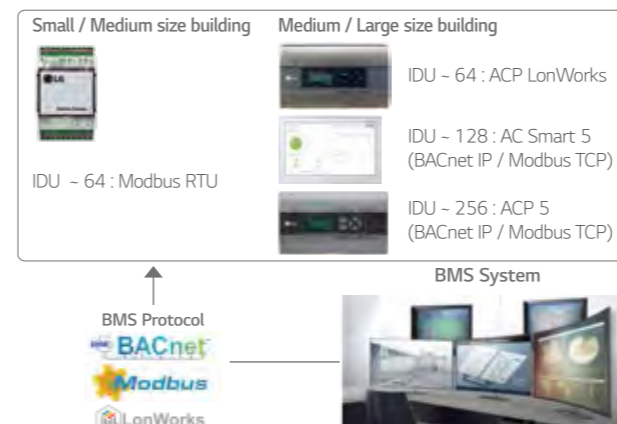


Energy Management Solution

Since HVAC systems use a significant portion of any building's total amount of energy, the energy saving functions of a controller can make a big difference. The energy navigation function enables you to set target values for energy consumption over a certain period of time. In addition, to achieve that value, the administrator can set the energy saving logic in 7 steps and predict the expected usage relative to the target value. Active self-management enables energy savings through out the building.

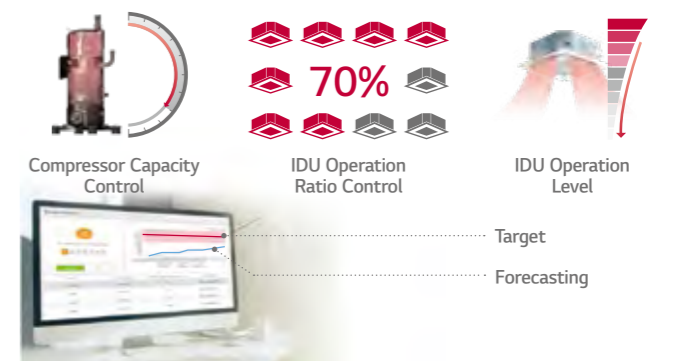

VARIOUS INTEGRATED SOLUTIONS



Education

AC Manager 5
Large capacity in compact size enhances space utilization




Public Facility

AHU Comm.Kit
Suitable for large public facilities through group control



Total Control of Any Device

In order to manage multiple spaces and multiple buildings, the administrators should be able to control systems from wherever they are. The LG central controller can be controlled from any web browser that supports HTML5. Now through the implementation of HTML5, the interface will look great and perform well on any device.

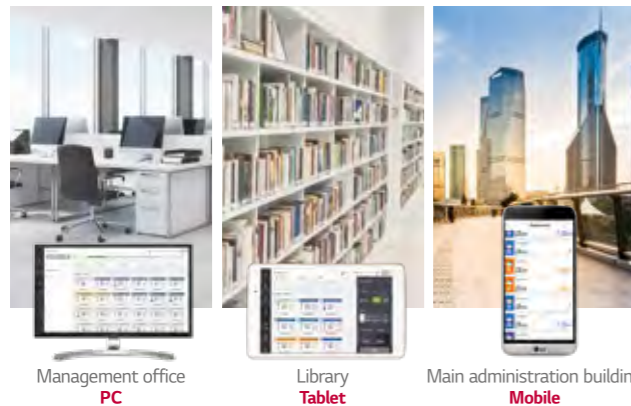

Air Purify Total Solution

Total management of air purify creates clean school environment for everyday. Using LG central controller, you can check the air condition of multiple zones at once and improve the overall air quality through simple control.

- Air Quality Information**
 - Air Quality Level Monitoring
- Air Purify Control**
 - Set / Clear

Air Quality Level Monitoring
System Air Conditioner

Commercial Air Purifier

Air Purify Control

Air Purify


- Easy setting of Air Purify function (Set / Clear)

View Air Quality Trends

- Daily (per hour), Period (30 days) shows trends
- Excel output / easy to manage

Air Handling Unit (AHU) Solution

AHU is a suitable solution for cooling and heating in large space. With an LG AHU Comm.Kit (for both return air / supply air control) connected to the DX coil of the AHU, LG VRF system can be applied to deliver conditioned air.

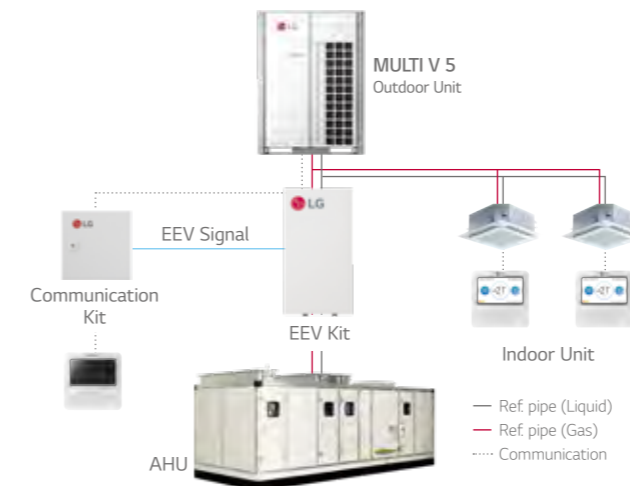
















































Interlocking Solution by Using ACS IO Module

It is costly to introduce a BMS system to control multiple devices or systems in a small building. With the ACS / ACU IO Module, various IO contact points (DI, DO, UI, AO) can be interlocked and integrated, while control is possible from the LG central controller. This enables an efficient management of lighting, pumps and other devices in the building in conjunction with the HVAC system.




LG BECON HVAC SOLUTION LINE UP

Individual Control		Centralized Control			
Wired Remote Controller		Wireless Remote Controller	Display	Platform	Gateway
Standard	Simple				
Standard III (White)			AC Ez	ACP 5	ACP LonWorks
 PREMTB100	 PQRCVCL0QW	 PWLSSB21H (Heat Pump) PWLSSB21C (Cooling Only)	 PQCSZ250S0 (Indoor Unit - 32)	 PACPSA000 (Indoor Unit - 256) BACnet IP / Modbus TCP	 PLNWKB000 (Indoor Unit - 64)
Standard III (Black)		Wi-Fi Modem	AC Ez Touch	AC Manager 5	Modbus RTU gateway
 PREMTBB10	 PQRCVCL0Q	 For Indoor Unit PWFMD200	 PACEZA000 (Indoor Unit - 64)	 PACMSA000 (Indoor Unit - 8,192)	 PMBUSB00A
Standard II (White)			AC Smart 5		PI485
 PREMTB001	 PQRCHCA0QW (Simple for Hotel)		 PACSSA000 (Indoor Unit - 128) BACnet IP / Modbus TCP		 For Indoor Unit (ERV) PHNFP14A0
Standard II (Black)					
 PREMTBB01	 PQRCHCA0Q (Simple for Hotel)				 For Outdoor Unit (SINGLE / MULTI / THERMA V) PMNFP14A1
Premium					
 PREMTA000 PREMTA000A PREMTA000B					

Centralized Control	Integration Device			
Facility Integrator	Indoor Unit		Outdoor Unit	AHU Kit
	Dry Contact	Control Accessory		
PDI (Power Distribution Indicator)		Group Control Wire	IO Module (Input / Output Module)	Communication Kit
 Premium (8 ports) PQNUD1S40 Standard (2 ports) PPWRDB000	 Simple Dry Contact PDRYCB000	 PZCWRCG3	 For MULTI V IV, 5 PVDSMN000	 Return / Room Air Control PAHCMR000
ACS IO Module (Input / Output Module)		Remote Temperature Sensor	Variable Water Flow Control Kit	
 PEXPMB000	 Dry Contact for Thermostat PDRYCB300	 PQRSTA0	 For MULTI V WATER IV PWFCNK000	 Discharge / Supply Air Control PAHCSM000
Chiller Option Kit		Zone Controller	Low Ambient Kit	Controller Module
 PCHLLN000	 Dry Contact for Thermostat (For using universal input) PDRYCB320	 4 Zones by thermostat ABZCA	 For MULTI V IV, 5 PRVC2	 Main Module PAHCM000
ACU IO Module UIO			Cool / Heat Selector	
 PEXPMB300	 2 Points Dry Contact (For Setback) PDRYCB400		 PRDSBM	 Communication Module PAHCMC000
UO				Control Kit
 PEXPMB200	 For Modbus PDRYCB500			 PAHCNM000 (Max. 3 Outdoor Units)
UI				Water Communication Module
 PEXPMB100				 PAHCMW000
			EEV Kit (Electronic Expansion Valve)	
		 PRLK048A0 (- 28 kW)	 PRLK396A0 (- 112 kW)	 PRLK594A0 (- 168kW)

CONTROL SYSTEM ARCHITECTURE

LG BECON HVAC SOLUTION offers a diverse range of effective control solutions that satisfy specific needs of each building and its user scene. These control systems are equipped with user-friendly interface, flexible interlocking environment, energy management and smart individual controller for optimized controlling conditions and smart building management

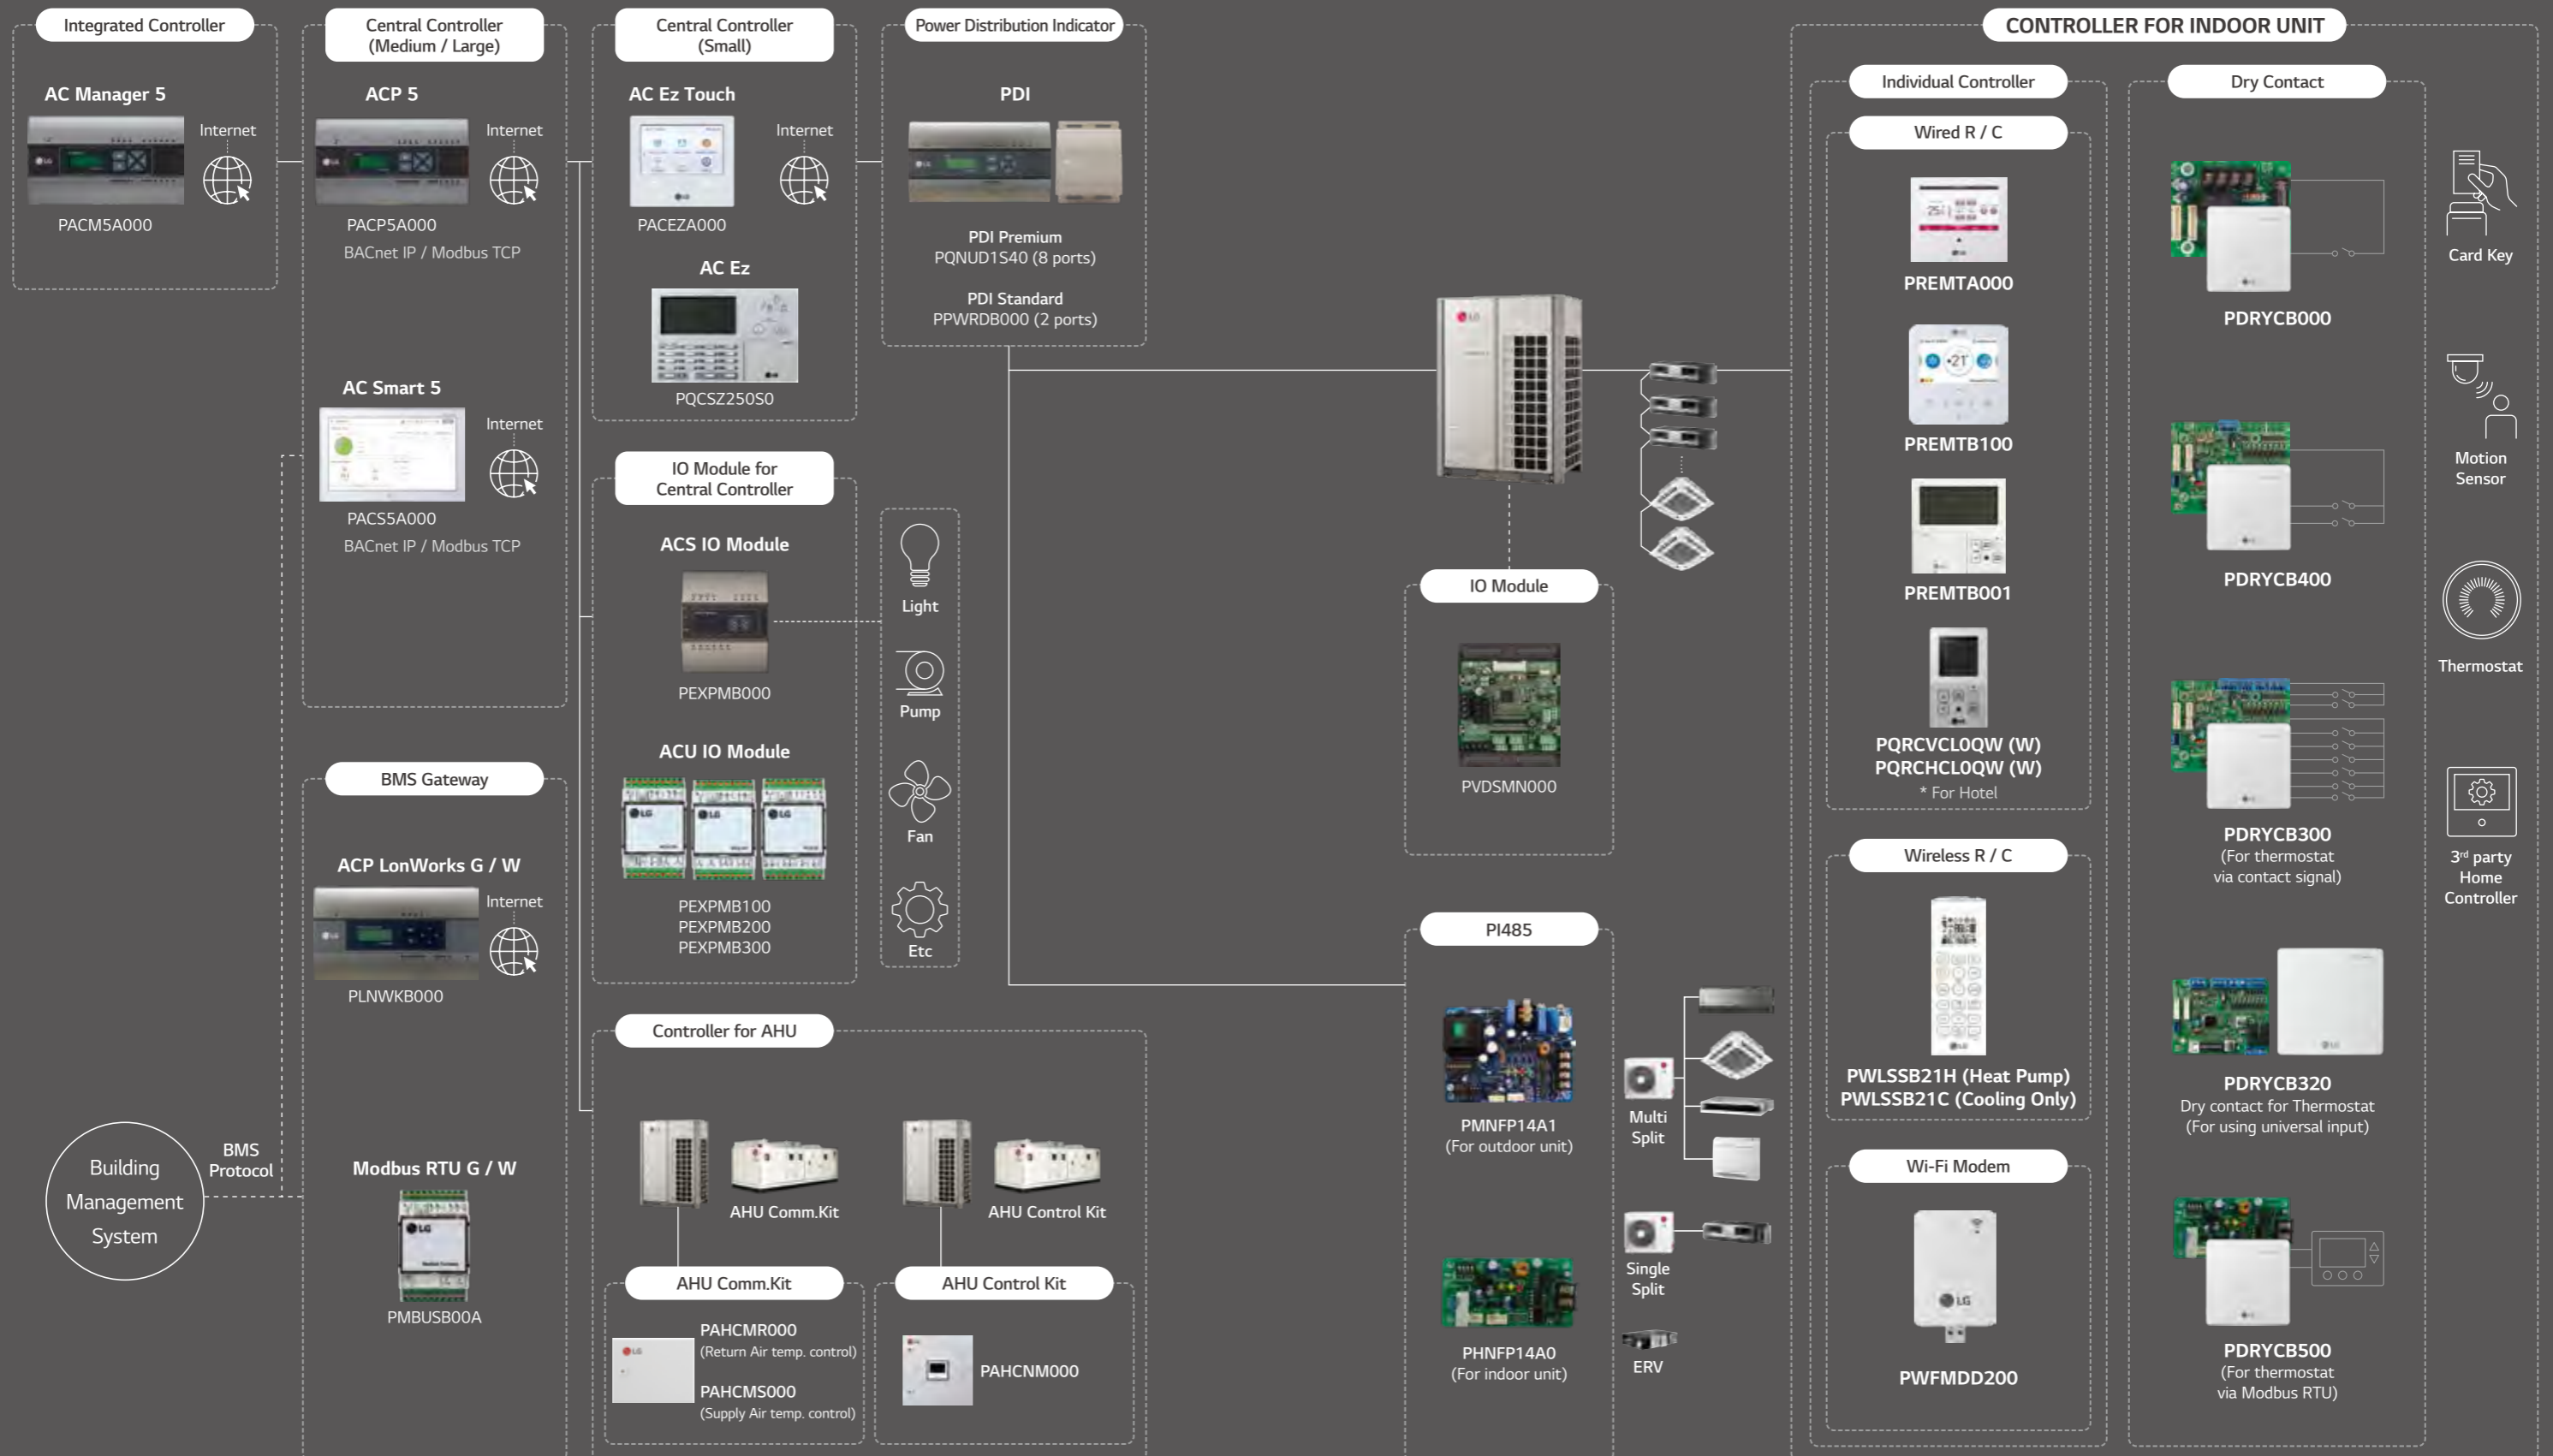

LG BECON HVAC SOLUTION

INDIVIDUAL CONTROL

020 - 035

CENTRALIZED CONTROL

036 - 057

INTEGRATION DEVICE

058 - 094

PROPOSAL CASE








095 - 101





INDIVIDUAL CONTROL

FEATURE FUNCTIONS

Controller Name	Wired Remote Controller					Wireless Remote Controller	Wi-Fi Modem
	Premium	Standard III	Standard II	Simple	Simple (Hotel)		
Model Name							
	PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01	PQRCVCL0QW PQRCVCL0Q	PQRCHCA0QW PQRCHCA0Q	PWLSSB21H (H / P) PWLSSB21C (C / O)	PWFMDD200
Basic	On / Off	○	○	○	○	○	○
	Fan Speed Control	○	○	○	○	○	○
	Temperature Setting	○	○	○	○	○	○
	Mode	○	○	○	○	-	○
	Auto Swing	○	○	○	○	○	○
	Vane Control (Louver Angle)	○	○	○	○	○	○
	E.S.P (External Static Pressure)	○	○	○	○	○	-
	Electric Failure Compensation	○	○	○	○	○	-
	Indoor Temperature Display	○	○	○	○	○	○
	All Button Lock (Child Lock)	○	○	○	○	○	-
Schedule / Timer	Weekly - Yearly	Weekly - Yearly	Weekly	-	-	Sleep / On / Off	Weekly
Wi-Fi AP Mode Setting	○	○	○	○	○	○	-
Advanced	Additional Mode Setting ¹⁾	○	○	○	-	-	-
	Time Display	○	○	○	-	-	○
	Humidity Display	○	○	-	-	-	-
	Advanced Lock (Mode, Set point, Set point range, On / Off Lock)	Advanced Lock	Advanced Lock	-	-	-	-
	Filter Sign	○	○	○	-	-	-
	Energy Management ²⁾	○	○	○	-	-	-
	Dual Set Point	○	○	-	-	-	-
	Human Detection	-	○	-	-	-	-
	Temp, Humidity Compensation	○	○	-	-	-	-
	Air Purify Control	-	○	-	-	-	○
Air Quality Level	-	○	-	-	-	-	
Dual Vane (6 Airflows mode)	-	○	-	-	-	○	
ETC	Operation Status LED	○	○	○	○	○	-
	Wireless Remote Controller Receiver	○ ³⁾	-	○ ³⁾	○ ³⁾	○ ³⁾	-
	Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.6 inch mono	2.6 inch mono	2 inch mono
	Size (W x H x D, mm)	137 x 121 x 16.5	120 x 120 x 16	120 x 120 x 16	64 x 120 x 15	64 x 120 x 15	51 x 153 x 26
	Black Light Control for Screen Saver	○	○	-	-	-	-

※ ○ : Applied, - : Not Applied
 1) It might not be indicated or operated at the partial product.
 2) Centralized control (PACEZA000 / PACS5A000 / PACP5A000 / PLNWKB000) and PDI (PQNUD1S40 / PPWRDB000) should be installed for this function.
 3) For ceiling type duct
 Note : 1. Indoor unit should have functions requested by the controller.
 2. If you need more detail, please refer to the manual of product. (<http://partner.lge.com> : Home > Doc.Library > Manual)

STANDARD III WIRED REMOTE CONTROLLER

4.3" COLORED SCREEN
WITH MODERN DESIGN



STANDARD III WIRED REMOTE CONTROLLER

PREMTB100 (White), PREMTBB10 (Black)

Size (W x H x D, mm) : 120 x 120 x 16



NEW
MODERN DESIGN



CONVENIENCE



SCHEDULE



Design

- 4.3 inch color LCD / Intuitive GUI
- Seamless design / Touch button
- Humidity sensor embedded

Comfort & Air Purification

- CO₂ level monitoring (For ERV)
- Air quality level monitoring
- Air purify control

Energy Contents


- Power consumption monitoring
- Operation time monitoring
- Temperature setback
- Time limit control

Advanced Functions

- Comfort cooling setting
- Smart Load Control setting
- Outdoor unit low noise setting
- Defrost noise setting
- ODU capacity control
- Schedule functions



COMFORT
& RELIABILITY
(Air Purify)



ENERGY
MANAGEMENT



INTERLOCKING





STANDARD III WIRED REMOTE CONTROLLER

PREMTB100 (White) / PREMTBB10 (Black)

4.3 inch colored screen with modern design



Touch Button

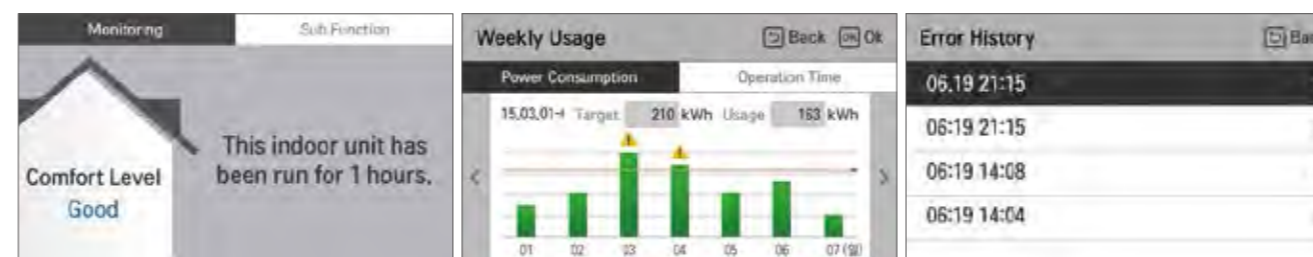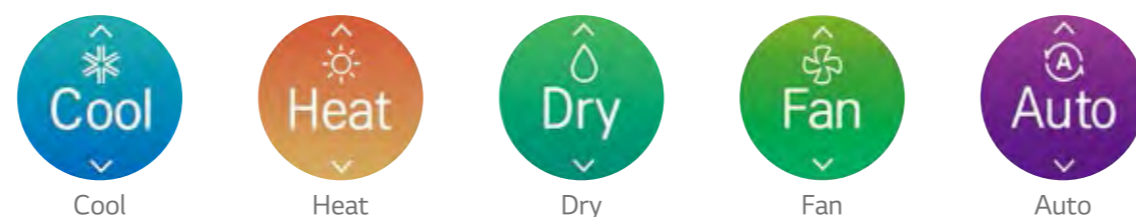

Comfort Level

Energy Contents

Error History

Model Name	PREMTB100 / PREMTBB10
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting ¹⁾	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification / Comfort Cooling
Auto Swing	○
Vane Control (Louver direction)	○
E.S.P (External Static Pressure) ²⁾	○
Reservation	Simple / Sleep / On & Off timer / Weekly / Yearly / Holiday
Time Display	○
Electric Failure Compensation	○
Lock	All / On & Off / Mode / Set temperature range
Filter Sign	○ (Remain time + Alarm)
Energy Management	Check Energy Usage ³⁾ / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data
Operation Status LED	○
Air Purify Control ⁴⁾	○
Air Quality Level ⁴⁾	○
Indoor Temperature Display	○
Indoor Humidity Display	○
Human Detection	○
Display	4.3 inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	120 x 120 x 16
Black Light for Screen Saver	○
Home Leave	2 set points control

※ ○ : Applied, - : Not Applied

1) The function is available in some product. (Refer to the product data Book).

2) This function is available for duct type.


3) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.

4) This function is available for indoor units that provide corresponding function.

Note : 1. Indoor unit needs to have functions requested by the controller.

2. 2 set points control works normally with MULTI V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly.

- PROVIDES OPTIMIZED CONTROL PERFORMANCE IN ANY BUSINESS ENVIRONMENT EXCELLENT USABILITY WITH MODERN DESIGN & EASY INTERFACE



STANDARD III WIRED REMOTE CONTROLLER

Features & Benefits

Air Quality Level Display

Easy check for indoor air quality

· PM10 / PM2.5 / PM1.0 · Status / Monitoring



Classification	Good	Moderate	Unhealthy	Poor
* PM10 (µg / m³)	0 ~ 54	55 ~ 154	155 ~ 254	255 ~
* PM2.5 (µg / m³)	0 ~ 12	13 ~ 35	36 ~ 55	56 ~
* PM1.0 (µg / m³)	0 ~ 12	13 ~ 35	36 ~ 55	56 ~

Note : Display color may change depending on the region / country.
This function is available for indoor units that provide corresponding function.

* PM (Particulate matter)
- PM10 : Coarse Particulate matter / PM2.5 : Fine Particulate matter / PM1.0 : Ultra Fine Particulate matter
- PM designated as a carcinogen as like an asbestos, widely known as carcinogen.
If the dust diameter is under 10 micrometers, it is PM10. And under 2.5 micrometers, it's PM2.5.

Environment Display

Displaying environment information for the more user comfort

Temperature / Humidity / Comfort level / CO₂ concentration



Dual Set Point


Auto changeover for convenience

- Indoor unit will keep the indoor temperature within the range of dual set point by automatically switch the unit operation.

Setback for energy savings and comfort

- In the user's absence, the room temperature will remain between two set points rather than switching off providing quick comfort when the mode is changed to occupied.

※ This function is for Heat Recovery system or Single heat pump. Otherwise it is not guaranteed.

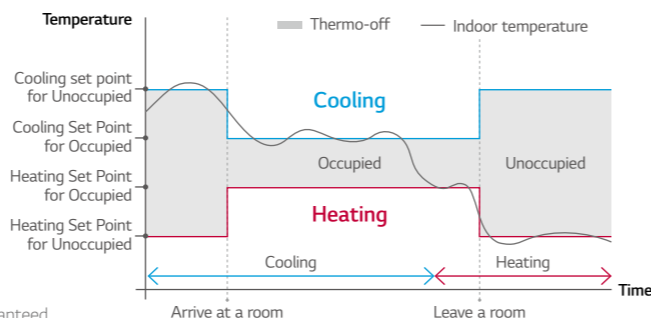

Energy Savings

Energy Management

- Energy Monitoring & Alarm


Real-time and day / week / month / year energy usage monitoring is possible. In addition, it can set target for energy usage and operation time, and alarm will be displayed when exceeded.

※ PDI (PQNUD1S40 / PPWRDB000) is required.

Time Limit Control

- Monitoring the unit's continuous running time.

And prevent the wasting energy by turning the unit off automatically.

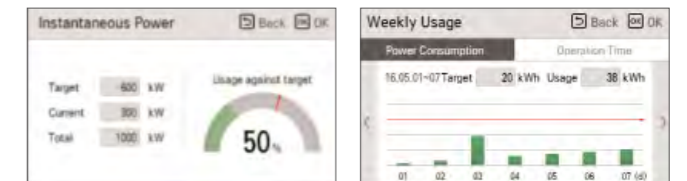

Instantaneous Power Check

Energy Usage Target Setting



Schedule Function


Simple Schedule Status

Standard III remote controller provides clock type daily schedule.



Exception Day Settings


Possible to set up exceptional date on regular schedule.

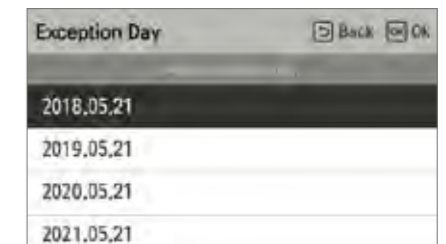

External Device On / Off


External Equipment Control


User can control the external equipment through additional contact signal output.

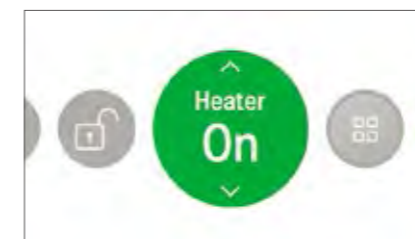

Customized Interlocking Control

User can create a automatic control pattern. For example controlling the external heater switches on when temperature drops below or rises above a certain temperature.

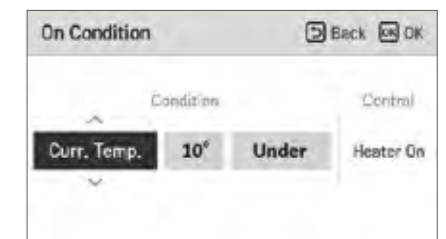



PREMIUM WIRED REMOTE CONTROLLER

Features & Benefits




Full Touch Screen



Easy Energy Management

- Check the operation hour or electricity usage
- Comparison of usage compared to last year
- Set the target usage and time

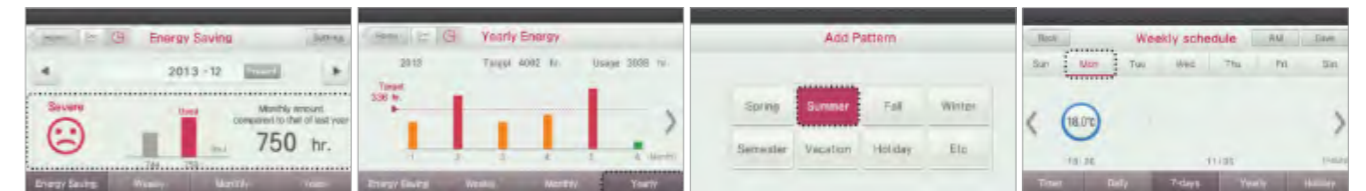

Easy Scheduling

- Daily, Weekly, Yearly schedule function
- Schedule pattern setting
- Schedule copy

PREMTA000¹⁾ / PREMTA000A²⁾ / PREMTA000B³⁾

5 inch full touch screen with a premium design



- * Supported languages list
 1) English / Portuguese / Spanish / French
 2) English / Italian / Russian / Chinese
 3) English / German / Polish / Czech

Model Name	PREMTA000 / PREMTA000A / PREMTA000B
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting ¹⁾	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	○
Vane Control (Louver direction)	○
E.S.P (External Static Pressure) ²⁾	○
Reservation	Simple / Sleep / On / Off / Weekly / Yearly / Holiday
Time Display	○
Electric Failure Compensation	○
Child Lock	○
Filter Sign	○ (Remain time + Alarm)
Energy Management	Check Energy Usage ³⁾ / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data
Operation Status LED	○
Indoor Temperature Display	○
Wireless Remote Controller Receiver	○ ⁴⁾
Display	5 Inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	137 x 121 x 16.5
Black Light for Screen Saver	○
Home Leave	2 Set Points Control

※ ○ : Applied, - : Not Applied

1) It might not be indicated or operated at the partial product.

2) This function is available for duct type.

3) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.

4) For ceiling type ducted unit


Note : 1. Indoor unit needs to have functions requested by the controller

2. 2 set points control works normally with MULTI V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly

Dual Set Point


- Auto changeover switching the operation mode automatically
- Setback (Leave Home) Changing status by occupied / unoccupied


* This function is only for Heat Recovery system and Single heat pump.

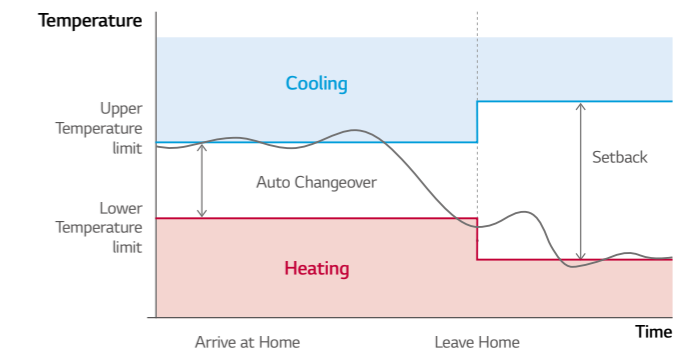

Group Control

- Max. 16 Indoor units by one remote controller

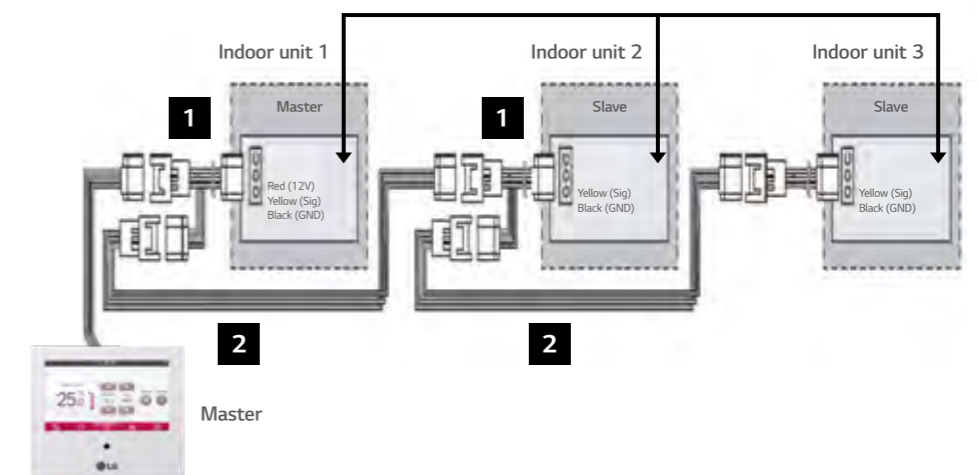



STANDARD II WIRED REMOTE CONTROLLER

PREMTB001(White) / PREMTBB01(Black)

Providing easy control of one or a group of indoor units with various functions.



Features & Benefits

- Wired remote controller that can implement various functions such as scheduling or filter alert.


Model Name	PREMTB001 / PREMTBB01
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	○
Vane Control (Louver direction)	○
E.S.P (External Static Pressure)	○
Reservation	Simple / Sleep / On / Off / Weekly / Holiday
Time Display	○
Electric Failure Compensation	○
Child Lock	○
Filter Sign	○ (Remain time + Alarm)
Operation Status LED	○
Indoor Temperature Display	○
Wireless Remote Controller Receiver	○ ¹⁾
Size (W x H x D, mm)	120 x 120 x 16
Black Light	○
Power Consumption Monitoring	○ ²⁾
Check Model Information	○

※ ○ : Applied, - : Not Applied

1) For ceiling type ducted unit

2) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.

Note : Indoor unit needs to have functions requested by the controller.



SIMPLE WIRED REMOTE CONTROLLER

PQRCVCLOQW (White) / PQRCVCLOQ (Black)
PQRCHCA0QW (White) / PQRCHCA0Q (Black)

A simple way to control office or hotel systems in a compact design.



Features & Benefits


- Small remote control with minimal functionality.

Model Name	PQRCVCLOQW / PQRCVCLOQ	PQRCHCA0QW / PQRCHCA0Q
On / Off	○	○
Fan Speed Control	○	○
Temperature Setting	○	○
Mode	Cool / Heat / Dry / Fan / Auto	-
Auto Swing	○	○
Vane Control (Louver direction)	○	○
E.S.P (External Static Pressure)	○	○
Electric Failure Compensation	○	○
Child Lock	○	○
Indoor Temperature Display	○	○
Wireless Remote Controller Receiver	○ ¹⁾	○ ¹⁾
Size (W x H x D, mm)	70 x 121 x 16	70 x 121 x 16
Black Light	○	○

※ ○ : Applied, - : Not Applied

1) For ceiling type ducted unit

Note : Indoor unit needs to have functions requested by the controller.



WIRELESS REMOTE CONTROLLER

PWLSSB21H (Heat Pump), PWLSSB21C (Cooling Only)

Handy and portable wireless type



Features & Benefits

- Easy to use while moving.
- Main functions are available.

Model Name	PWLSSB21H (H / P), PWLSSB21C (C / O)
On / Off	○
Fan Speed Control	○ ¹⁾
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting	Plasma Purification / Energy-Saving Cooling / Robot Cleaning / Auto Dry
Auto Swing	○
Vane Control (Louver direction)	○
Reservation	Sleep / On / Off
Time Display	○
Indoor Temperature Display	○
Sleep Mode Auto	Max. 7 hours
Size (W x H x D, mm)	51.4 x 153 x 26

※ ○ : Applied, - : Not Applied

1) For some products, you can use "slow" fan speed function.



WI-FI MODEM



※ Search "LG ThinQ" on Google play or Appstore then download the app.
 ※ Internet service with Wi-Fi connection has to be available.

PWFMDD200

Control conditioners by using internet devices as Android or iOS smartphones.




Features & Benefits

- User can enjoy anytime, anywhere access with Wi-Fi equipped device through LG's ThinQ mobile app.
- This allows the user to access the unit remotely to switch unit on or off before or after leaving the vicinity.
- LG's exclusive Home Appliances control app (LG ThinQ) is available.
- Simple operation for various functions.
 - On / Off
 - Operation Mode
 - Current / Set Temperature
 - Fan Speed
 - Vane Control ¹⁾
 - Reservation (Sleep, Weekly On / Off)
 - Energy Monitoring ²⁾
 - Filter Management
 - Error Check
 - Air Purify ³⁾

Model Name	PWFMDD200
Size (W x H x D, mm)	48 x 68 x 14
Interfaceable Products	System Air Conditioner ³⁾
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11b / g / n
Mobile Application	LG ThinQ (Android v4.1(Jellybean) or higher, iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)

Note : 1. Functionality may be different according to each IDU model.
 2. User interface of application shall be revised for its design and contents improvement.
 3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices.
 1) Vane Control may not be possible according to the type of Indoor unit.
 2) LG Centralized controller and PDI installation is required for this function.
 3) For the compatibility with Indoor unit, please contact regional LG office.

Installation Scene

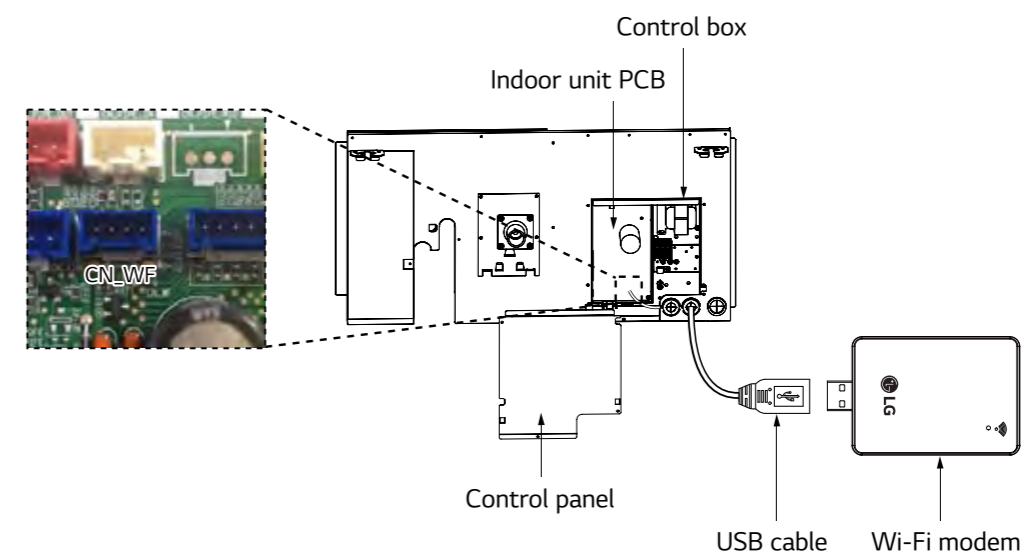

※ The Wi-Fi communication distance and reliability may vary due to the type of Wi-Fi router and the installation environment, Please refer to the manual.





WI-FI MODEM

LG ThinQ Connectivity

Connection (Pairing) Order

- 1 Make LG account on LG ThinQ (Application) and login.
- 2 Select the installed product and set AP (Access Point) mode by wired / wireless remote controller.
- 3 Select the Wi-Fi network that will be used and insert the passwords.
- 4 Product registration progress is completed.


* 5GHz networks may not be supported.

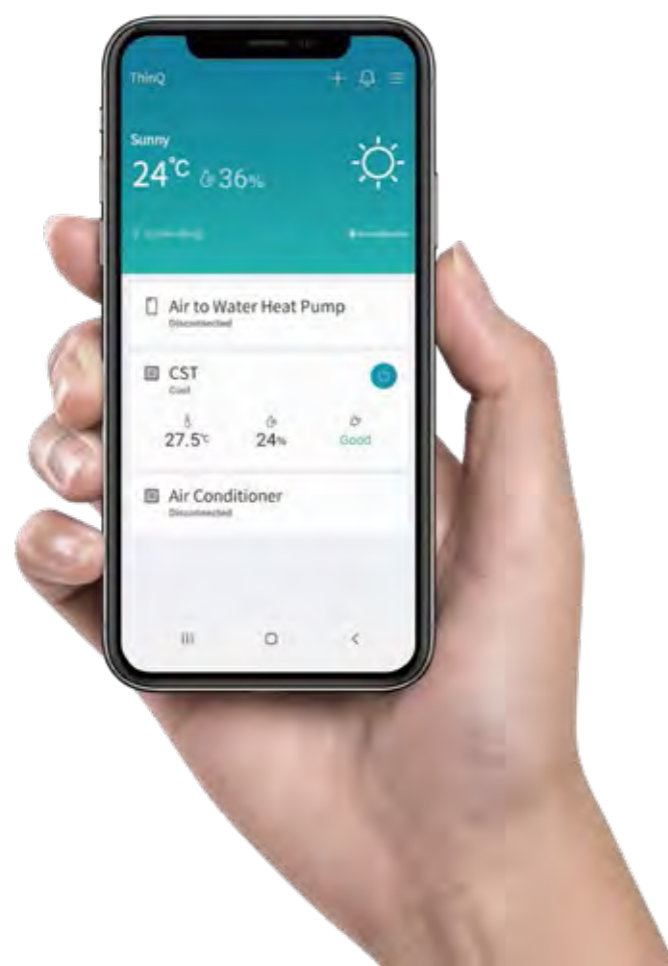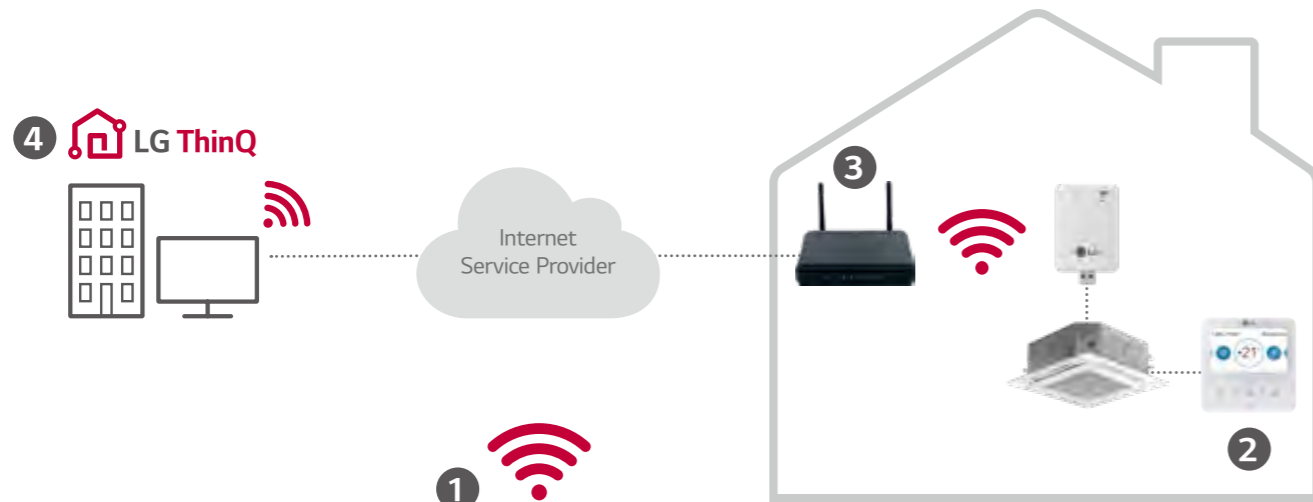

LG ThinQ Mobile App

Simple operation for various functions


On, Off, Current Temp., Mode, Set Temp.

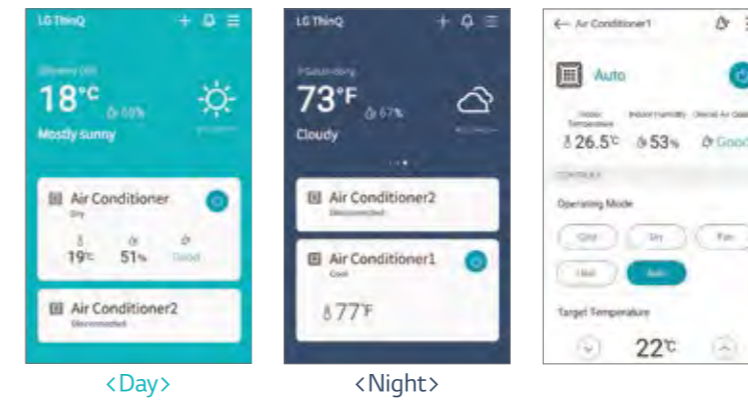

Vane Control




Air Purify

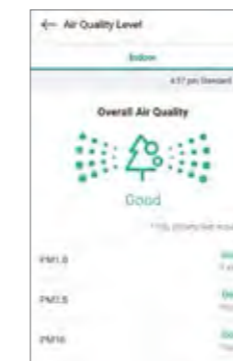


Easy Management

Reservation

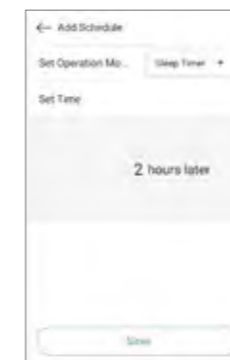

Energy Monitoring

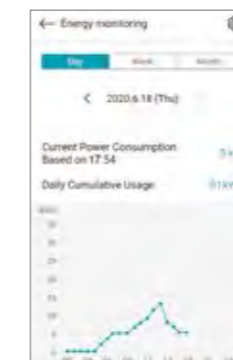

Smart Diagnosis









Filter Management





CENTRALIZED CONTROL

FEATURE FUNCTIONS

Controller Name		AC Ez	AC Ez Touch	AC Smart 5 ⁶⁾	ACP 5 ⁶⁾	ACP LonWorks	AC Manager 5 ⁷⁾	
Model Name								
		PQCSZ250S0	PACEZA000	PACSSA000	PACP5A000	PLNWKB000	PACM5A000	
Product	DO	-	-	2	4	2	-	
	DI	-	1	2	10	2	-	
	Max. Connectable No.	IDUs	32	64	128	256	64	8,192
		ERV	32	64	128	256	64	8,192
		A / C + ERV	32	64	128	256	64	8,192
		AHU	-	-	16	16	16 ⁵⁾	16 x 32
Chiller		-	-	5 Optional ⁴⁾	10 Optional ⁴⁾	-	10 x 32	
Commercial Air Purifier ¹⁾	-	-	64	128	-	128 x 32		
Compatibility	Air Conditioner	○ ³⁾	○	○	○	○	○	
	Ventilation (ERV / ERV DX)	○ ⁴⁾	○	○	○	○	○	
	Heating	-	○	○	○	○	○	
	AHU	-	-	○	○	○	○	
	Chiller	-	-	○ ⁵⁾	○ ⁵⁾	-	○	
	Commercial Air Purifier ¹⁾	-	-	○ ⁵⁾	○ ⁵⁾	-	○	
Additional Function	ACS IO	-	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Add Drawing	-	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Group Management	-	○	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Auto Changer Over	-	○	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Set Back	-	○	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Dual Setpoint	-	○	○	○	○ ⁵⁾	○	
	Change Alarm	-	Filter	Filter	Filter	Filter	Filter	
	Indoor Unit Lock	○ ⁸⁾	○	○	○	○ ⁵⁾	-	
	Cycle Monitoring	-	-	○	○	○ ⁵⁾	○	
	Air Purify	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	-	○	
Schedule		○	○	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
Auto Control	Peak Control	-	○	○	○	○ ⁵⁾	○	
	Priority Control	-	-	○	○	○ ⁵⁾	○	
	Outdoor Unit Capacity Control	-	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Time limit control	-	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
Energy Navigation	Interlocking	-	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Power	-	○	○	○	○ ⁵⁾	○	
	Gas	-	-	○	○	○ ⁵⁾	○	
Energy Report	Run time	-	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Save to PC / USB (Excel)	-	-	PC / USB ⁵⁾	PC	PC	PC	
	Trend Reporting	-	-	-	-	-	○	
History	Report (Control / Error)	-	Error	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Send Email	-	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	Save to PC / USB (Excel)	-	-	PC / USB ²⁾	PC ²⁾	○ ⁵⁾	PC ²⁾	
	Summer Time	-	○	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
etc	Outdoor Unit Oil-Return Operation	-	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	-	
	User Authority	-	Password	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	
	PC Access	-	○	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	

※ ○ : Applied, - : Not Applied

1) The Commercial Air purifier must additionally install PI485(PHNFP14A0).

2) Save to PC / USB function will be available from 2021.

3) Except for some feature (Individual lock, Limit temp, etc.)


4) Except for some feature (User mode, additional function, etc.)

5) This function is not applied for BMS points.

6) Without additional device, ACP 5 and AC Smart 5 provide BACnet IP and Modbus TCP interface for BMS.

7) ACP 5 or AC Smart 5 is required.

8) Hard Lock



AC EZ TOUCH

Features & Benefits



PACEZA000

Smart management with 5 inch touch screen for small site.



Model Name	PACEZA000
Size (W x H x D, mm)	137 x 121 x 25
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro Kit / THERMA V
Maximum number of units	64
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Error Check	○
Slave Mode (Interlocking with higher level controller)	○
Schedule	Weekly / Monthly / Yearly / Exception day
Remote Access	By client S / W
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation History	Error record
ODU Low Noise ¹⁾	○
Daylight Saving Time	○
External IO Port	DI 1
IPv6 Support	○
Air Purify Control	○
Air Quality Level	○

※ ○ : Applied, - : Not Applied
1) It is only available in some products.

PC Access

Users can control each space efficiently through PC access.



- * IPv6 supported
- Fixed Public IP is recommended. If not, router's configuration of NAT is required.
- Open port 80 & 9300


Energy Statistics (with PDI)

Statistics of operational status (Time, Power consumption) are provided to help make intelligent system operation decisions.


Energy		
2020.2.8 ~ 2020.3.19		
Today Week Month		
Name	Usage(kWh)	Accumulated(kWh)
Group1	110	3021
Group2	150	6186
Group3	130	4267
Group4	120	7614


Energy Mode

When using energy mode function, operation Modes from cooling to fan or heating to off mode by force. (It is available only for operating indoor unit)

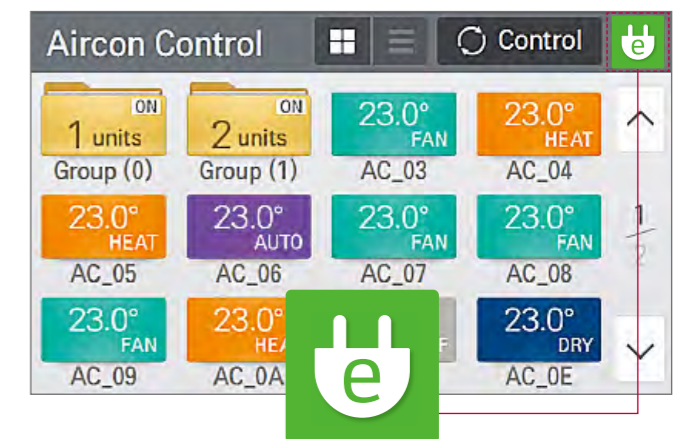

Air Purify Control & Monitoring

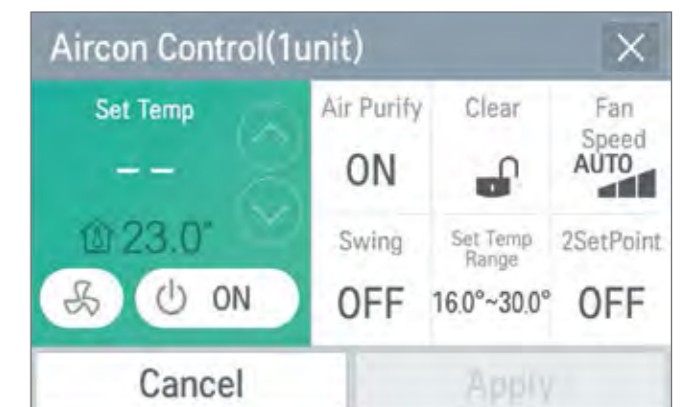




AC EZ TOUCH


Alarm Indicator

It shows errors and alarm information. Users can respond immediately according to alarm indicator therefore HVAC system is monitored consistently.

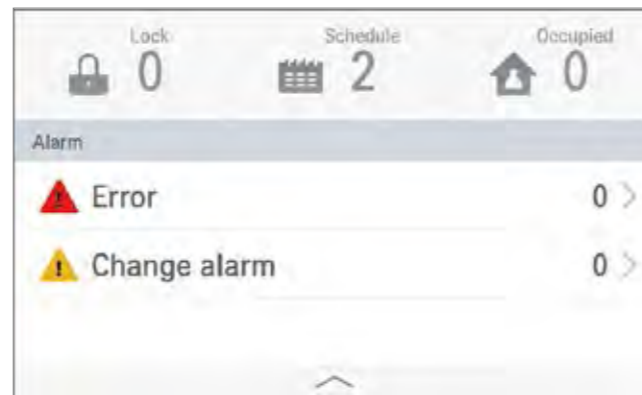



Schedule

Schedule control allows user to set the events in advance to maximize system performance. Also, by blocking unnecessary operation, it prevents a waste of energy.

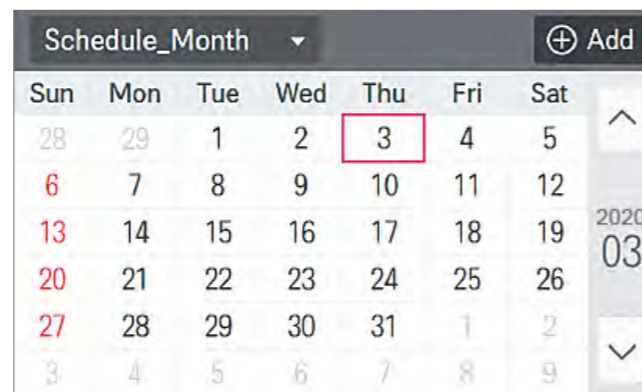


Group / Individual Control

User can control each indoor unit individually or by group by simply clicking each unit on control screen.

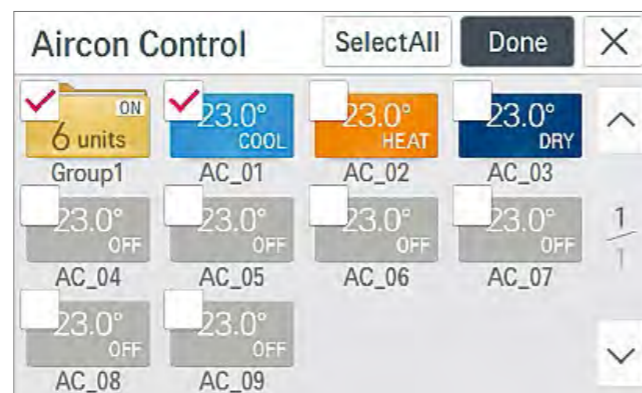

AC EZ

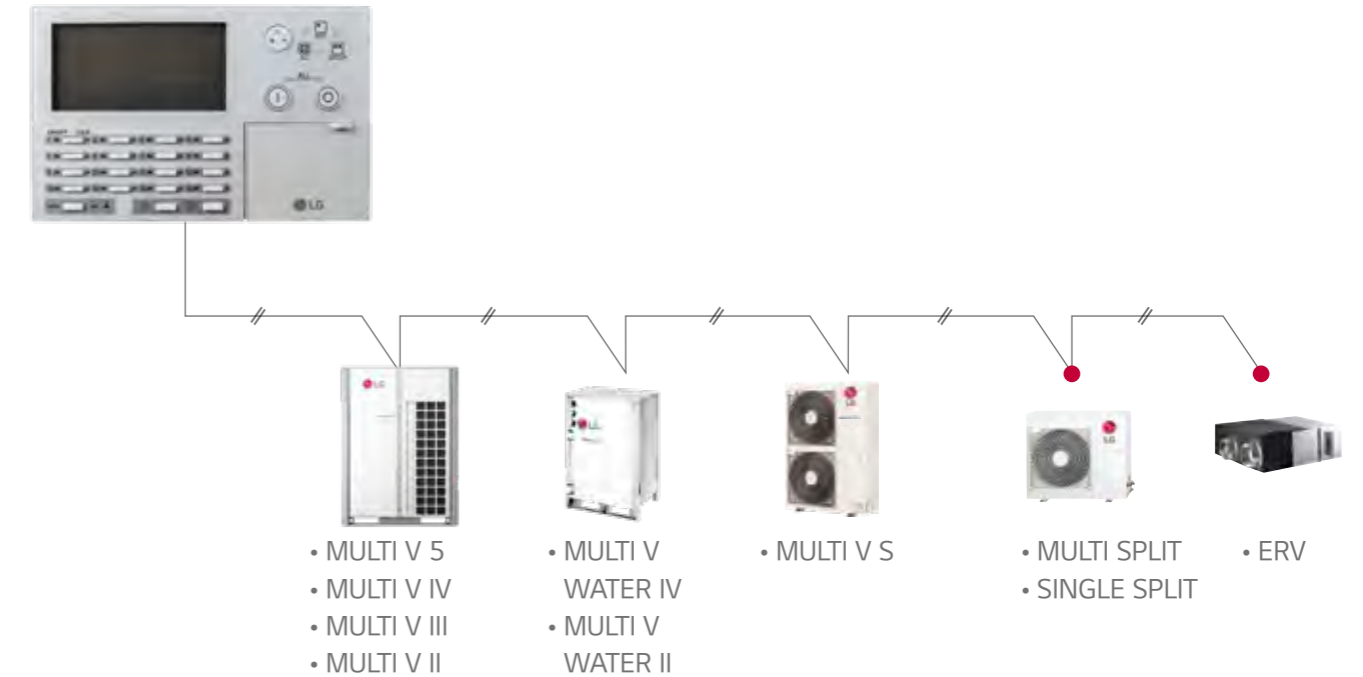

• Appropriate PI485 should be used according to PDB.

PQCSZ250S0

Easy to manage up to 32 indoor units, including ERV with simple interface.



Features & Benefits

- 32 indoor units control
- Weekly Schedule
- Individual / Group Control

Model Name	PQCSZ250S0
Size (W x H x D, mm)	190 x 120 x 20
Interfaceable Products	MULTI V / ERV / ERV DX
Display	LED / LCD Display
Power	DC 12V
Maximum number of units	32
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	All
Error Check	○
Slave Mode (Interlocking with higher level controller)	○
Schedule	Weekly

※ ○ : Applied, - : Not Applied

AC SMART 5

10" WITH HTML5 GUI
TOUCH SCREEN
FOR EASY CONTROL




AC SMART 5

PACS5A000

Size (W x H x D, mm) : 253.2 x 167.7 x 28.9




MAX. 128
IDU CONTROL



SCHEDULE



MAP VIEW
(Visual navigation)

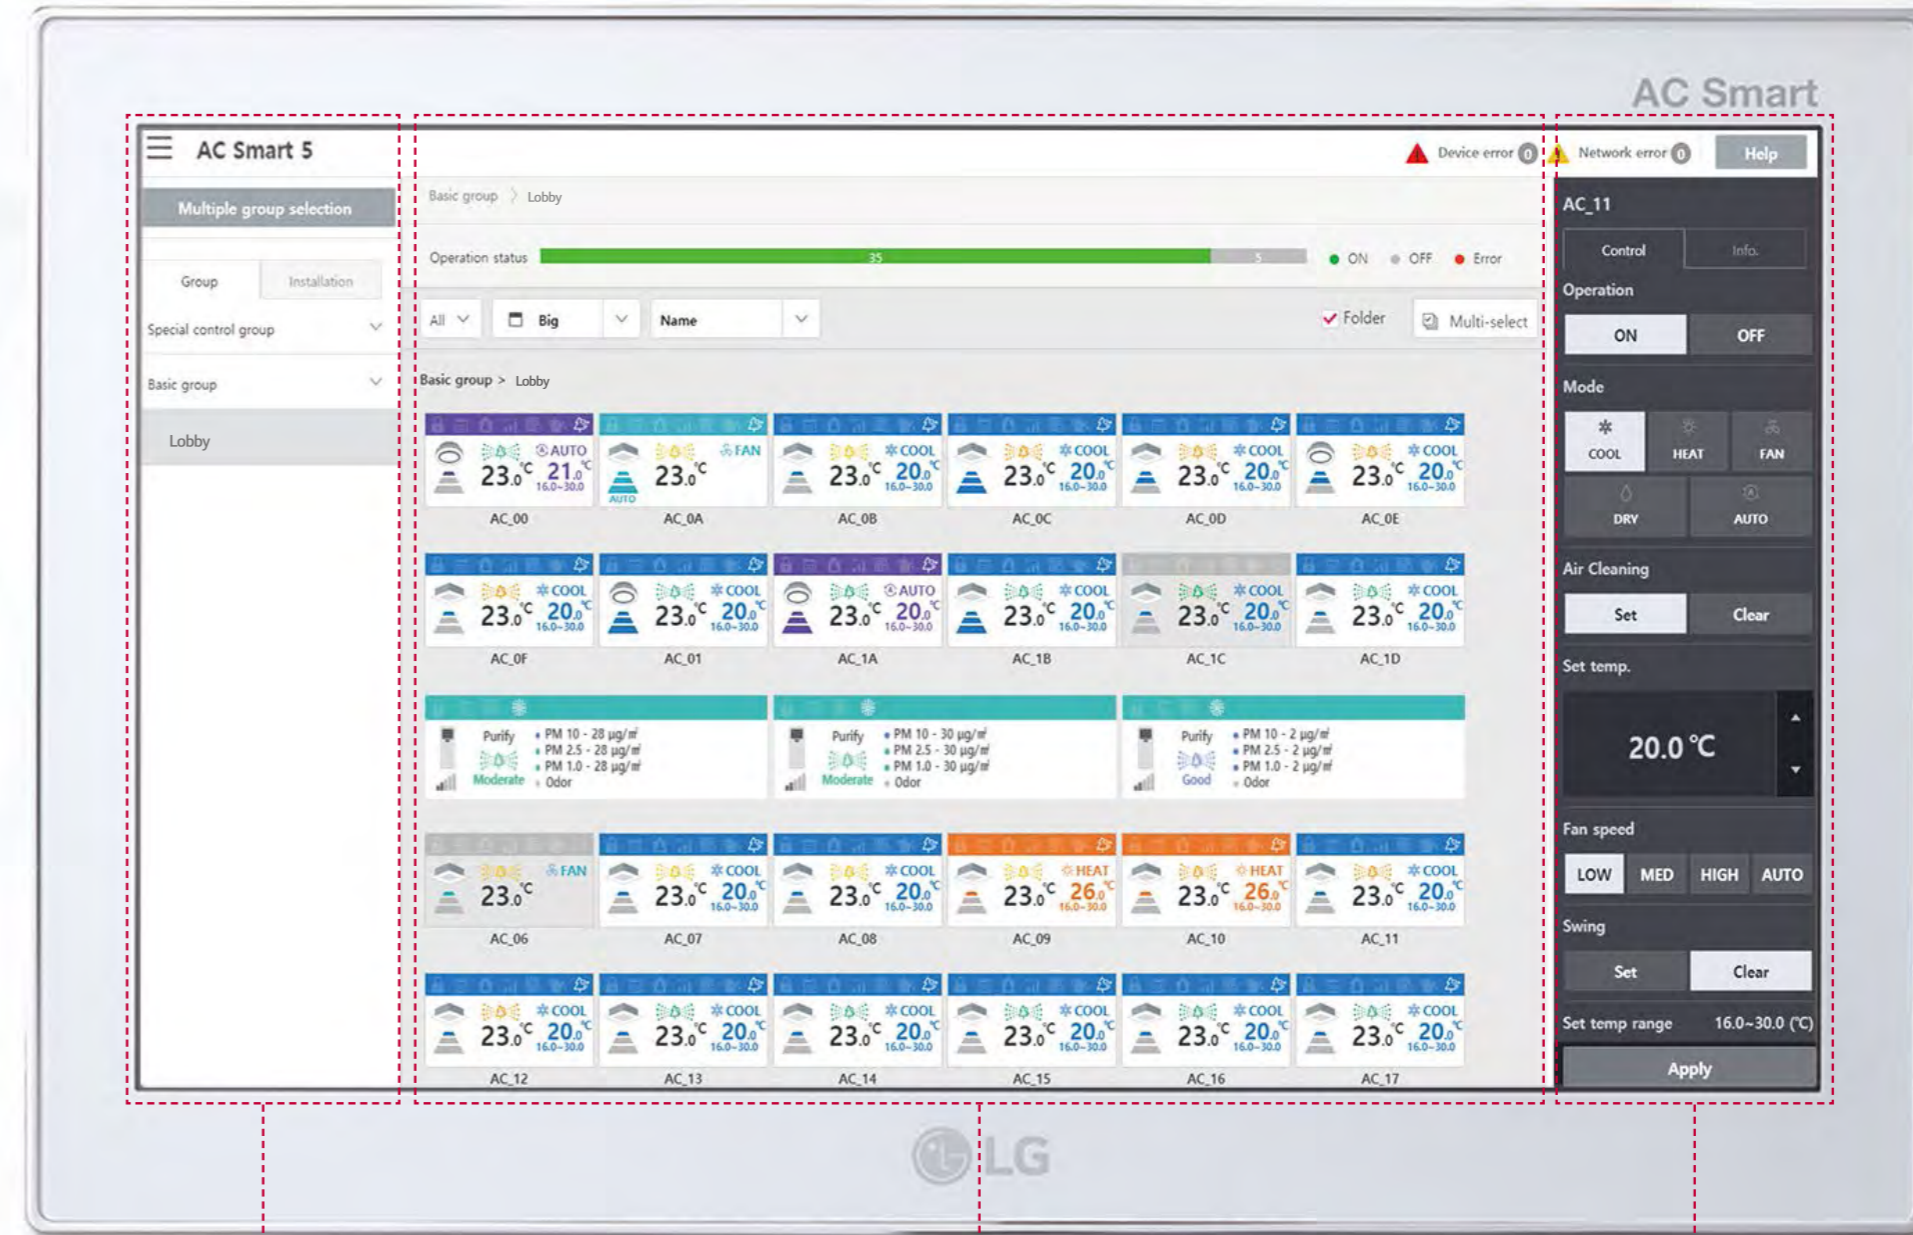

MENU BAR

STATUS VIEWING

CONTROL MENU



ENERGY
MONITORING



AIR PURIFY




MULTI LEVEL
GROUPING




• THE CENTRAL CONTROLLER ALLOWS CONTROL OF THE LG HVAC SYSTEM TO VARIOUS PLATFORMS (Touch screen, PC, Smartphone, Tablet)

CENTRALIZED CONTROL



AC SMART 5

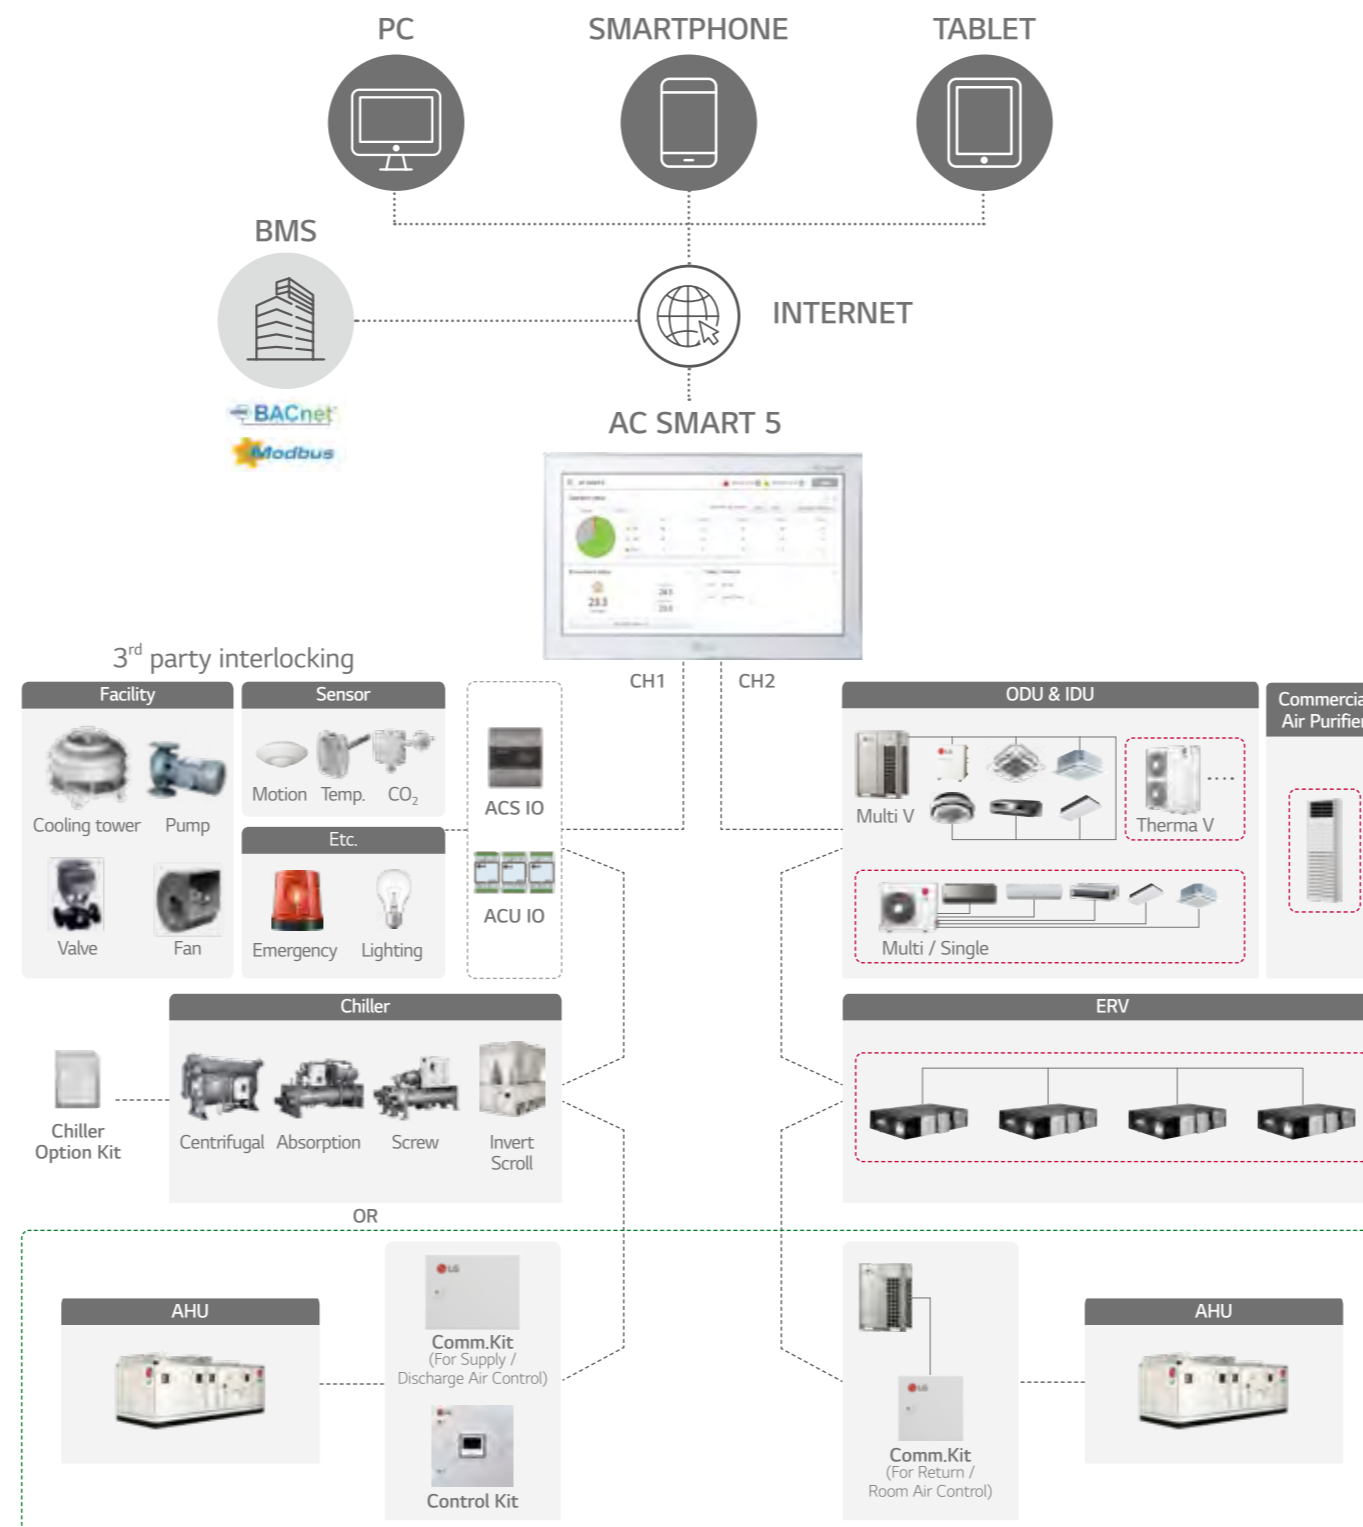

- ☐ According to CH1 setting, normal ODU can be connected to CH1. (Flexible wiring design with 2 ports)
- ☐ Appropriate PI485 should be used according to PDB (Product Data Book).
- ☐ For details, refer to the product PDB or manual.


PAC5A000

10-inch touch screen with HTML5 GUI (Graphic User Interface) for easy control.



Model Name	PAC5A000
Size (W x H x D, mm)	253.2 x 167.7 x 28.9
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro kit / THERMA V / AHU Kit / LG Chiller ¹⁾ / Commercial Air Purifier
Maximum number of units	128
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Advanced Function Setting and Display ²⁾	Comfort Cooling / ODU Low Noise / ODU Defrost Mode / Comfort Level display / CO ₂ Level display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	○
Slave Mode (Interlocking with higher level controller)	○
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	○
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Air Purify Control	○
Air Quality Level	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○
Daylight Saving Time	○
External IO Port	DI 2 / DO 2
BMS Integration ³⁾	BACnet IP / Modbus TCP
IPv6 Support	○

※ ○ : Applied, - : Not Applied
 1) Chiller Option Kit (PCHLLN000) is required.
 2) It is only available in some products.
 3) For the detail point list, please refer to the installation manual.




AC SMART 5

Features & Benefits


Air Purify Total Solution

Air Purify Control




- Easy setting of Air Purify function (Set / Clear)

Air Quality Level Monitoring



System Air Conditioner

Commercial Air Purifier

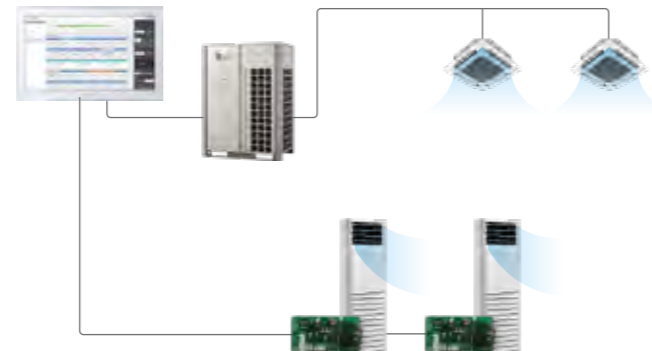

* The Commercial Air purifier must additionally install PI485(PHNFP14A0).

Advanced Network Accessibility

AC Smart 5 reflects the state of the art of network technology trend. IPv6 (Internet Protocol version 6), which is the most recent version of the Internet Protocol provides accessibility to the IPv6 compatible network environment. In addition, HTML5 allows you to easily control LG HVAC system on a variety of platforms (PC, Mobile, Tablet), at any time and from any location, not just on the touch screen.



Visualized Control

Visual navigation enables controlling and monitoring the unit on floor plan view for the intuitive management.




Multi Level Group Composition

User can make frequent and multi level group to control and monitor the device easily.




Energy Management

The energy navigation function allows the air conditioner's operational energy usage to be managed monthly, weekly and yearly. By analyzing present energy consumption and comparing with the plan, overuse of system operational costs can be prevented.

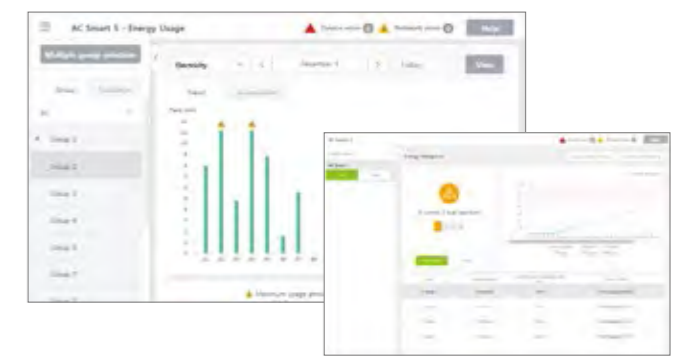


Building Management System (BMS) Integration


Without additional device, AC Smart 5 provides BACnet IP & Modbus TCP interface for BMS integration as well as its own management function.

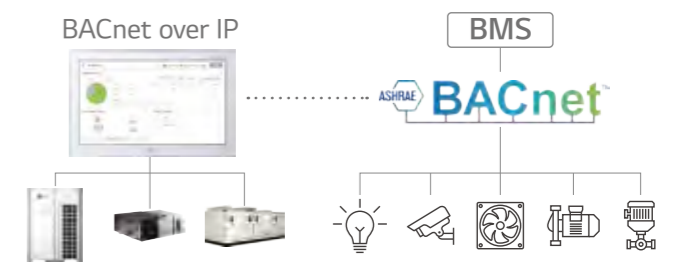


Interlocking with 3rd Party Equipment

AC Smart 5 can make operation scenario with 3rd party equipment by ACS IO Module. Control coverage is expanded. (Air conditioner only → Sensors, Fans, Pumps, Switches...)

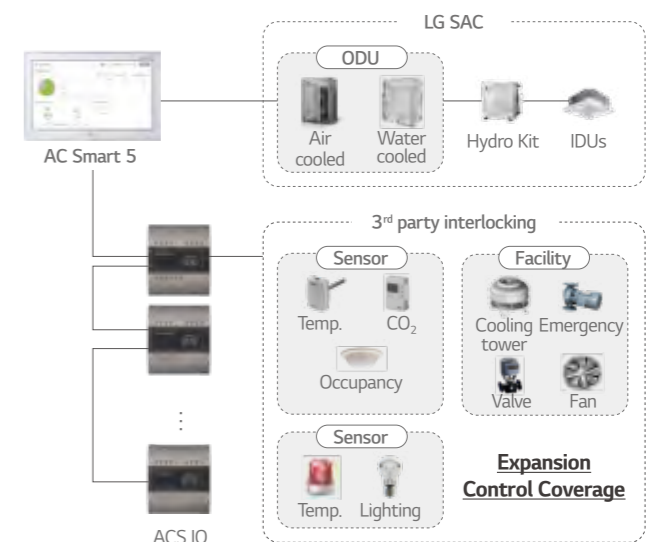



ACP 5

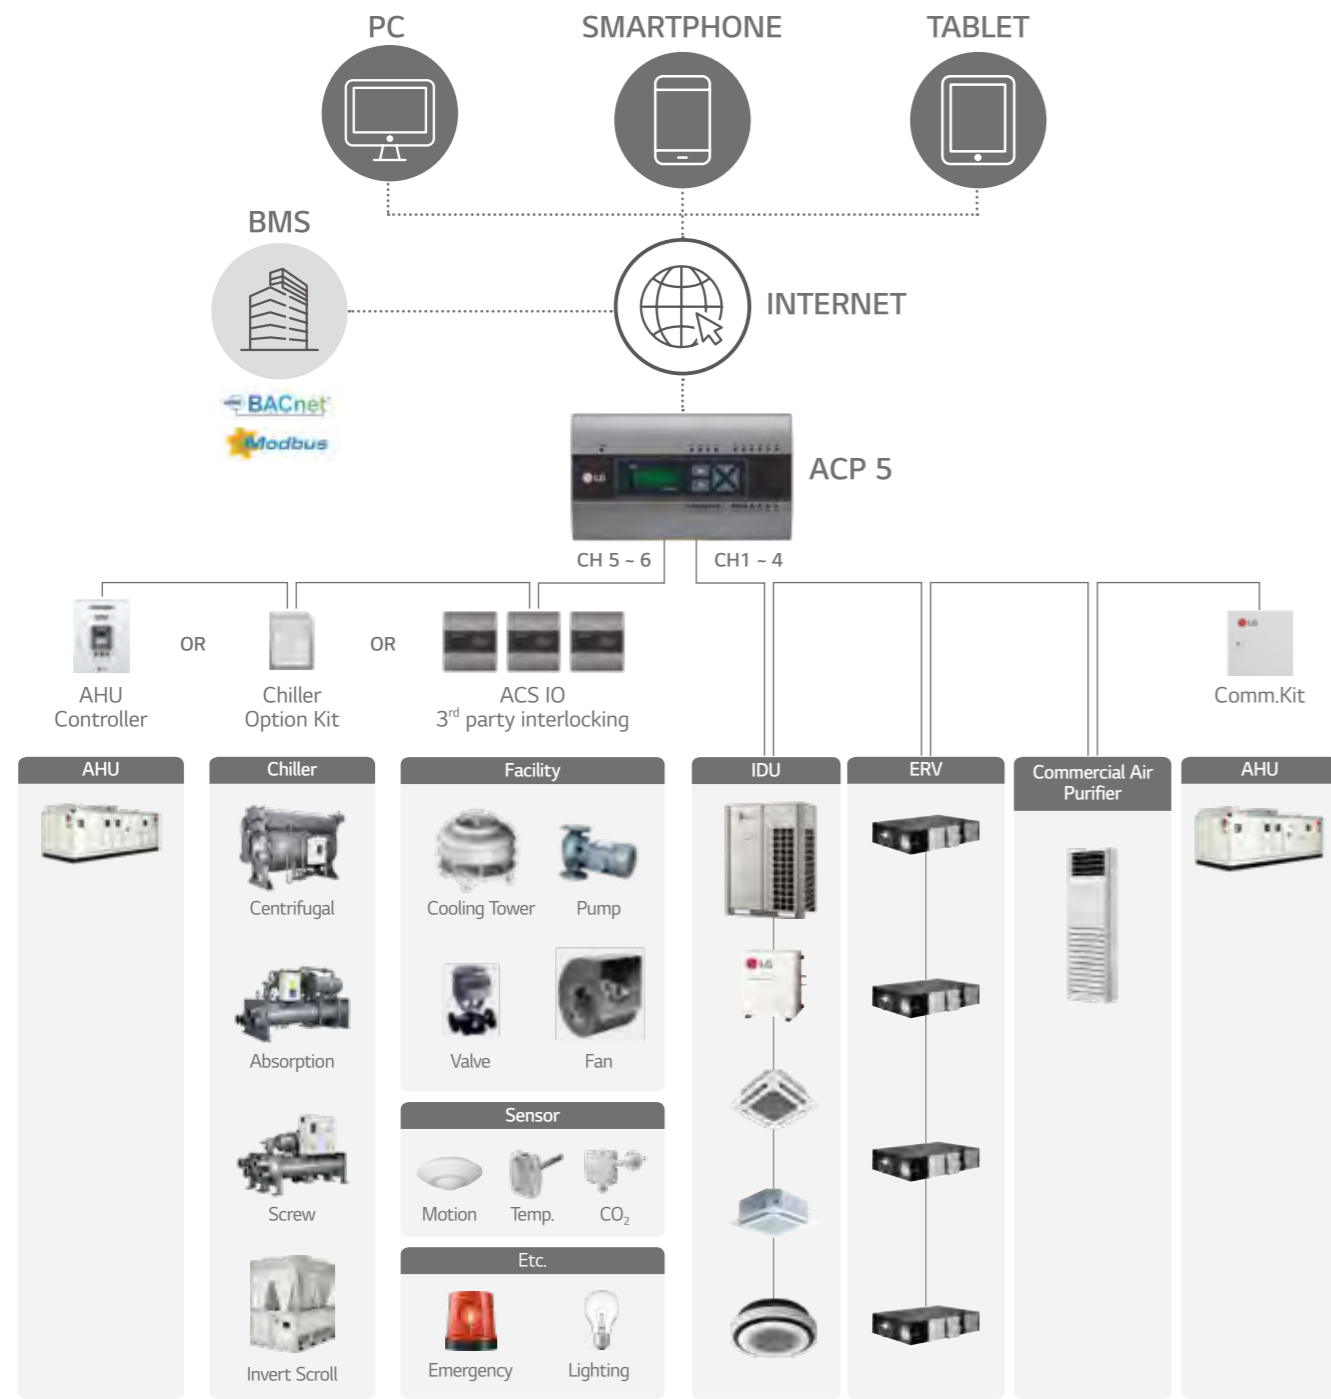

Advanced Network Accessibility

Energy Navigation

BACnet IP & Modbus TCP

Air Purify Control / Monitoring

* Fix Public IP is mandatory.
* Router's Configuration of NAT is mandatory. Open port 80 & 9300.


PACP5A000


Advanced solution for BMS integration up to 256 units via BACnet and Modbus protocol as well as its own smart management function with web server interface.





Model Name	PACP5A000
Size (W x H x D, mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro kit / THERMA V / AHU Kit / LG Chiller ¹⁾ / Commercial Air Purifier
Maximum number of units	256
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Advanced Function Setting and Display ²⁾	Comfort Cooling / ODU Low Noise / ODU Defrost Mode / Comfort Level display / CO ₂ Level display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	○
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	○
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Air Purify Control	○
Air Quality Level	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○
Daylight Saving Time	○
External IO Port	DI 10 / DO 4
BMS Integration ³⁾	BACnet IP / Modbus TCP
IPv6 Support	○

※ ○ : Applied, - : Not Applied
1) Chiller Option Kit (PCHLLN000) is required.
2) It is only available in some products.
3) For the detail point list, please refer to the installation manual.

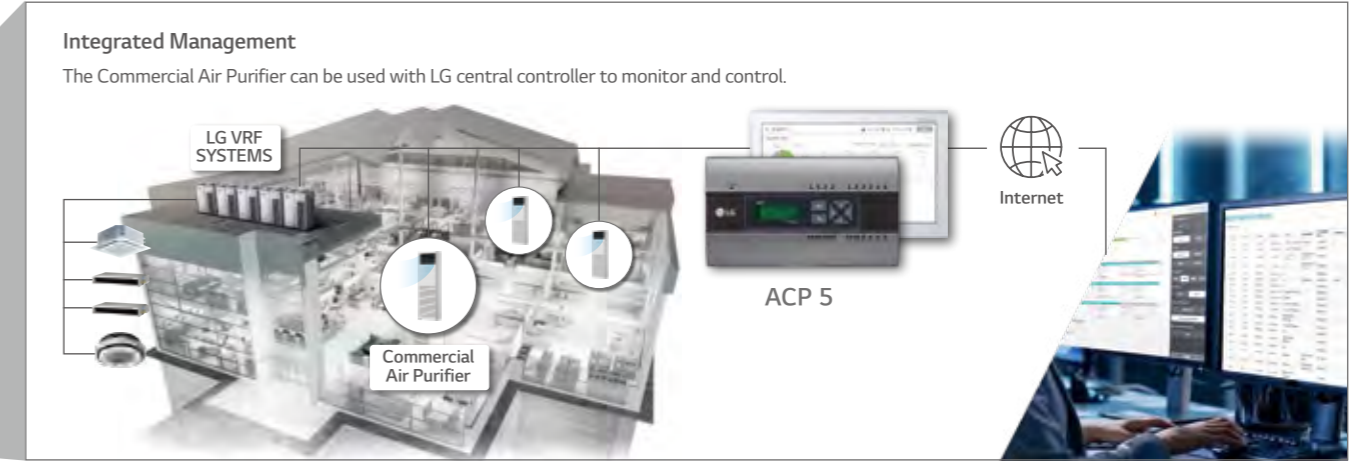



AC MANAGER 5

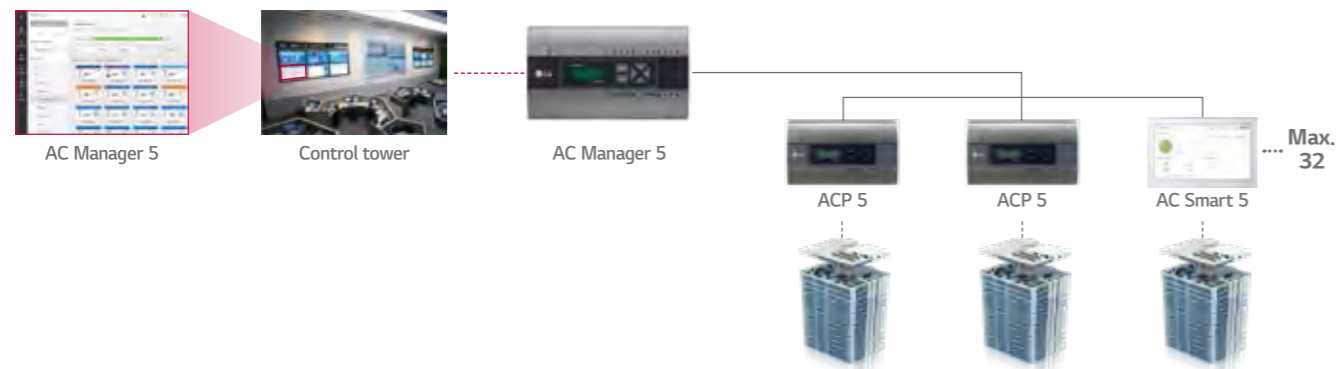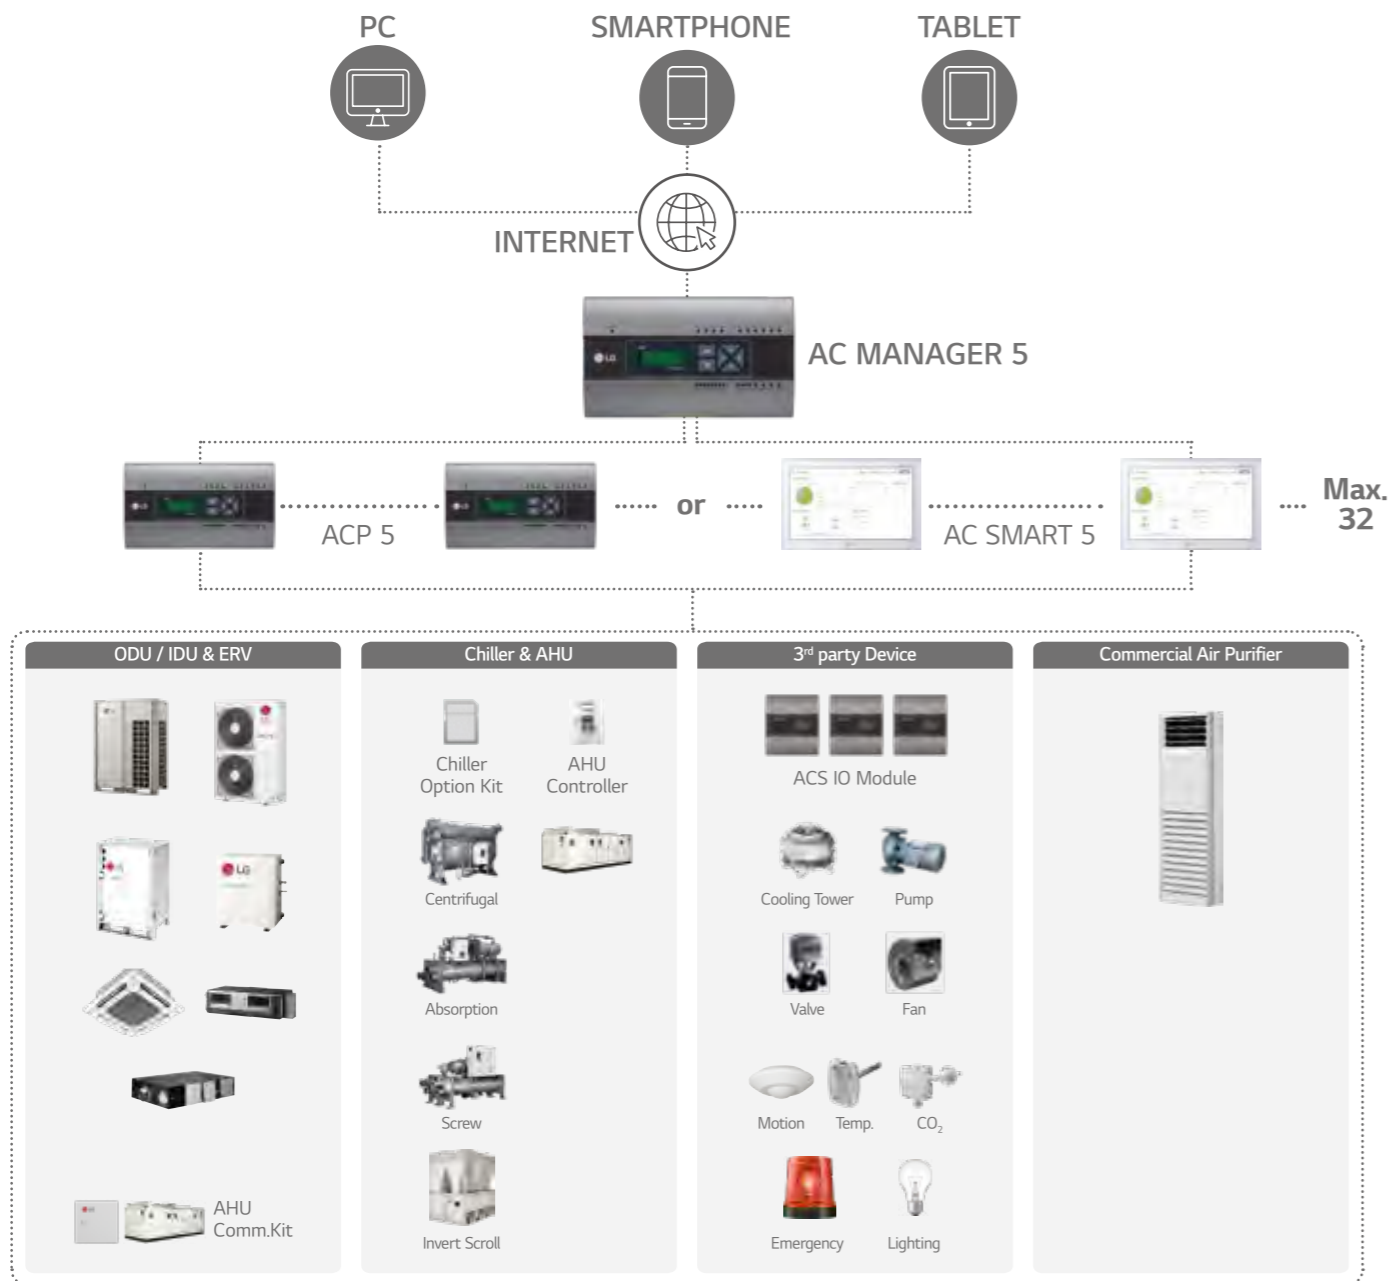

PACM5A000

Multiple ACP and AC Smart integration solution to manage multi sites up to 8,192 units as a single system.




Model Name	PACM5A000
Size (W x H x D, mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro kit / THERMA V / AHU Kit / LG Chiller ¹⁾ / Commercial Air Purifier
Maximum number of units	8,192 (Supports 32 ACP 5 or AC Smart 5)
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Error Check	○
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	○
Emergency Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Air Purify Control	○
Air Quality Level	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○

※ ○ : Applied, - : Not Applied

1) Chiller Option Kit (PCHLLN000) is required for ACP 5 or AC Smart 5.

Note : AC Manager 5 required for ACP 5 or AC Smart 5




AC MANAGER 5

Features & Benefits

Up to 8,192 Connections for Indoor Units

Administrators can easily and conveniently manage a variety of LG HVAC equipment. Also, it is available to manage many buildings or areas at one place via AC Manager 5.

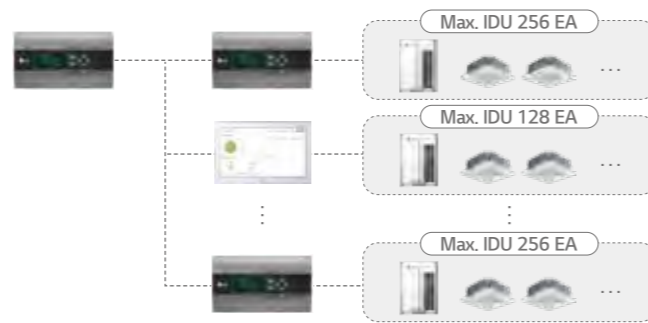

Advanced Network Accessibility & User Friendly GUI

As an advanced central controller, AC Manager 5 offers flexible interface for each user by assessing the device screen and automatically customizing the layout to provide the most optimized interface.



Smart Air Purify Solution

Total management of air purify function creates clean environment for everyday.

Air Quality Multi Status view



Air Quality Summary Widget

No.	Name	Group	Fine dust	Status
1	AIR PURIFIER_1F	New	96	Good
2	AIR PURIFIER_1E	New	95	Good
3	AIR PURIFIER_1D	New	94	Good
4	AIR PURIFIER_1C	New	93	Good
5	AC_01	New	93	Poor
6	AIR PURIFIER_1B	New	92	Moderate
7	AIR PURIFIER_1A	New	91	Poor
8	AIR PURIFIER_19	New	90	Moderate
9	AC_02	New	90	Poor
10	AIR PURIFIER_18	New	89	Moderate
11	AIR PURIFIER_17	New	88	Poor


- Average Value
- View by Device (Name, Air Quality value, Status)

Air Purify Control



- Easy setting of Air Purify function (Set / Clear)

View Air Quality Trends

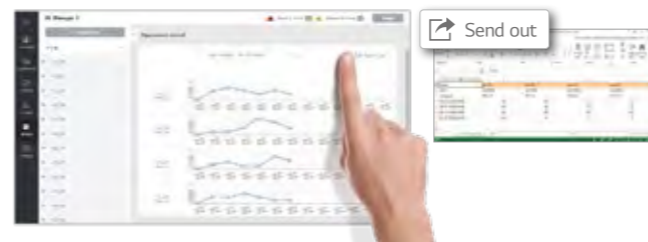

- Daily (per hour), period (30 days) shows trends
- Excel output / easy to manage


Energy Navigation & Energy Usage Graph

Energy navigation is the function to set the target usage amount to limit the monthly power consumption and to control so that the total accumulated power consumption does not exceed the target usage amount. It performs total of 7 control levels with the estimated / actual usage amount exceeding ratio compared to the monthly target usage amount. For the control method, there are indoor unit operation ratio, outdoor unit capacity control, and indoor unit operation control.



Peak Control


This function can reduce electricity use. There are two kinds of control logic. Energy saving effect by indoor unit operation rate control. Load management effect by outdoor unit capacity control.

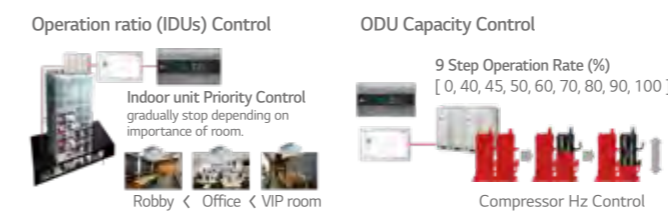

Multi Level Group Composition

User can make frequent and multi level group to control and monitor the device easily.





ACP LONWORKS GATEWAY

PLNWKB000

LonWorks easily link LG Air conditioners and other existing building systems. By including ACP control function, the controlling continues even when error occurs with BMS.



Features & Benefits

- Connect to use LonWorks protocol and LG Air conditioner protocol.
- Process ability (Max. connection) : Indoor unit 64EA, AHU Control Kit : Max. 16EA
- Self installation verification using internet (Web Server Included) - Diagnosis of communication status on LG Air conditioner network
- It offers a variety of functions as ACP which allows the customer to efficiently control various types of equipment from the customer's own Integration.

Control	Monitoring
On / Off Command	On / Off
Operation Mode Setting	Operation Mode
Lock	Lock
Temperature	Temperature
Fan Level	Fan Level
Fan Direction Auto	Fan Direction Auto
Mode Lock	Mode Lock
Fan Level Lock	Fan Level Lock
Temperature Lock	Temperature Lock
Temperature Lower Limit	Temperature Lower Limit
Temperature Higher Limit	Temperature Higher Limit
Peak Convert Cycle	Peak Convert Cycle
Peak Setting	Peak Setting
Temperature Unit	Temperature Unit
Total Temperature Lock	-
Total On / Off	-
Total Temperature	-
-	Product Type
-	Product Address
-	Current Temperature
-	Alarm
-	Power
-	Error Code
-	Peak Current Operating Percent
-	Total Accumulate Power

※ ○ : Applied, - : Not Applied



PI485

PI485 converts LG Air conditioners protocol to the RS485 protocol for the central controller.

PMNFP14A1




- Power : Single phase AC 220V 50 / 60Hz
- **1 for Each Outdoor Unit**
 - MULTI V MINI (ARUN40GS2A / ARUV40GS2A Only needs PI485)
 - SINGLE SPLIT - MULTI SPLIT - THERMA V

PHNFP14A0



- Power : Connected with the Indoor Units
- **1 for Each Indoor Unit**
 - Indoor Unit (ERV)

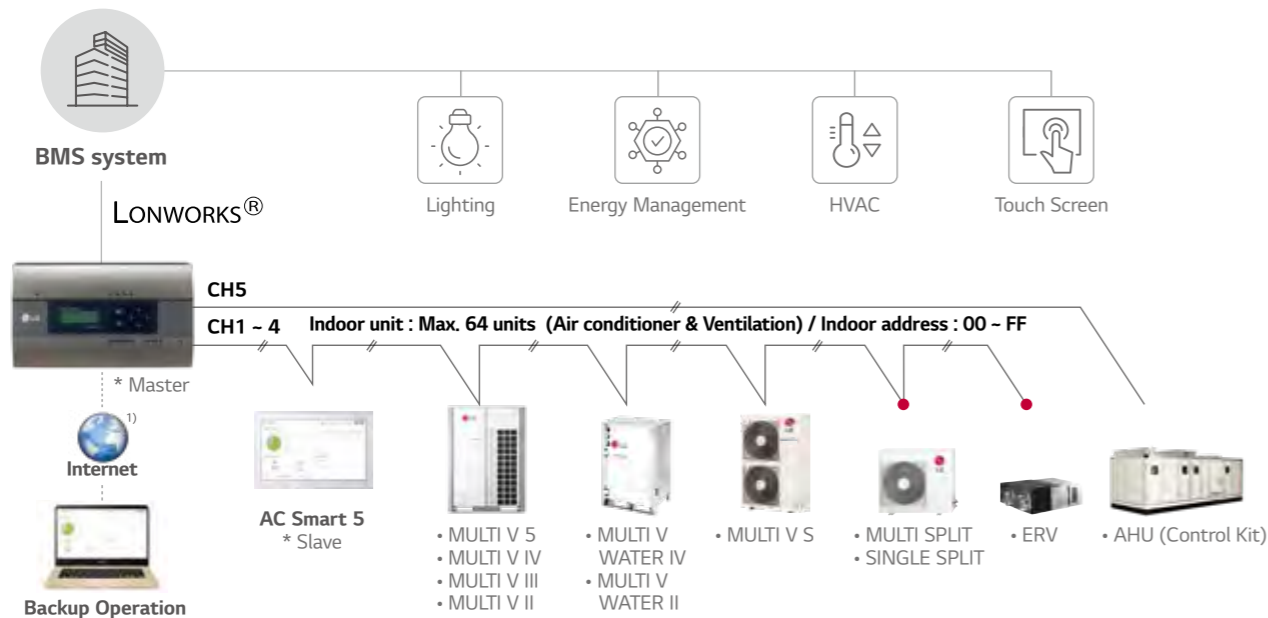

1) Assignment of public IP address is required to access central controller through internet.

• Appropriate PI485 should be used according to PDB (Product Data Book).



MODBUS RTU GATEWAY

PMBUSB00A

Providing Modbus RTU connection between LG Air conditioners and BMS.




Features & Benefits

- Function
 - Modbus RTU communication with Modbus master controller
 - Modbus RTU slave (RS485) / 9,600 bps
 - Applicable for MULTI V 5, MULTI V S, ERV, Heating
 - Size (W x H x D, mm) : 53.6 x 89.7 x 60.7
 - Max. 16 IDUs with single module / Max. 64 IDUs with 4 modules
 - Power : DC 12V

Installation Scene


• Single Module

Max. 16 indoor units with a single module

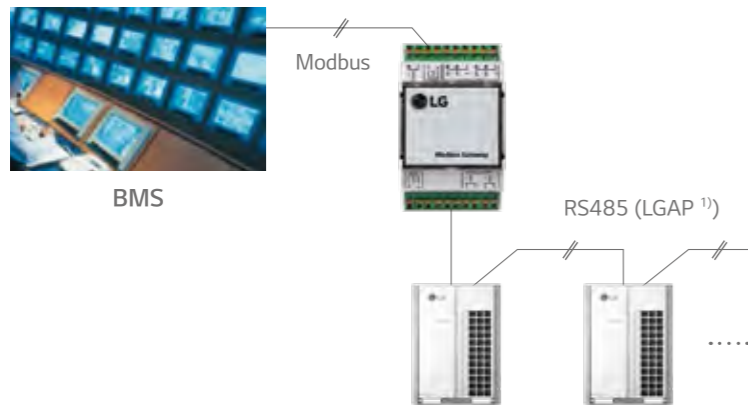

• Multiple Module

Max. 64 indoor units with 4 modules in one Modbus communication line

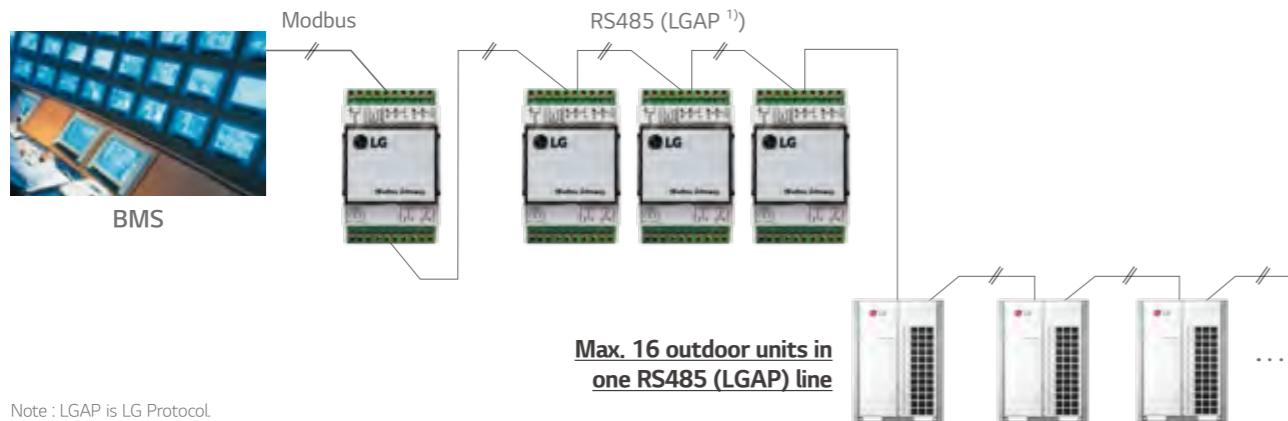

Note : LGAP is LG Protocol.

Modbus Gateway Memory Map

Baud Rate : 9,600 bps, Stop Bit : 1 stop bit, Parity : None Parity, Byte size : 8 bits

Coil Register (0 x 01)

No.	Data Bit			Function	Register
	Air Conditioner	ERV / DX ERV	Hydro Kit & THERMA V		
1	Operate (On / Off)	Operate (On / Off)	Operate (On / Off)	0 : Stop / 1 : Run	Register = N X 16 + ① (N = Indoor Unit Central Address)
2	Auto Swing	Aircon Operate (On / Off)	Hot Water Mode (On / Off)	0 : Disable / 1 : Enable	
3	Filter Alarm Release	Filter Alarm Release ¹⁾	Reserved	0 : Normal / 1 : Alarm Release	
4	Lock Remote Controller	Lock Remote Controller	Lock Remote Controller	0 : UnLock / 1 : Lock	
5	Lock Operate Mode	Lock Operate Mode ¹⁾	Reserved	0 : UnLock / 1 : Lock	
6	Lock Fan Speed	Lock Fan Speed ¹⁾	Reserved	0 : UnLock / 1 : Lock	
7	Lock Target Temp.	Lock Target Temp. ¹⁾	Reserved	0 : UnLock / 1 : Lock	
8	Lock IDU Address	Lock IDU Address ¹⁾	Reserved	0 : UnLock / 1 : Lock	
9	Reserved	Quick Ventilate	Reserved	0 : Disable / 1 : Enable	
10	Reserved	Energy Save	Reserved	0 : Disable / 1 : Enable	

1) : This register value is applied 'DX Ventilator' ONLY.

Discrete Register (0 x 02)

No.	Data Bit			Function	Register
	Air Conditioner	ERV / DX ERV	Hydro Kit & THERMA V		
1	Connected IDU	Connected IDU	Connected IDU	0 : Disconnected / 1 : Connected	Register = N X 16 + ① (N = Indoor Unit Central Address)
2	Alarm	Alarm	Alarm	0 : Normal / 1 : Alarm	
3	Filter Alarm	Filter Alarm ¹⁾	Hot Water Only ²⁾	• 0 : Normal / 1 : Alarm Hydro Kit • 0 : Normal / 1 : Hot Water Only	
4	Reserved	Reserved	Target Temp. Select	0 : Air / 1 : Water	
5	Reserved	Reserved	Error Division ²⁾	0 : CH type error / 1 : BC type error	

1) : This register value is applied 'DX Ventilator' ONLY.

2) : This register value is applied 'Hydro Kit' ONLY.

Holding Register (0 x 03)

No.	Data Bit			Function	Register
	Air Conditioner	ERV / DX ERV	Hydro Kit & THERMA V		
1	Operate Mode	Operate Mode	Connected IDU	• 0 : Cooling, 1 : Dehumidifying, 2 : Fan, 3 : Auto, 4 : Heating Hydro Kit (Middle Temp. DHW) / AWHP • 0 : Cooling, 3 : Auto, 4 : Heating Hydro Kit (High Temp. DHW)	Register = N X 20 + ① (N = Indoor Unit Central Address)
2	Fan Speed	Fan Speed	Target Temp. DHW ²⁾	1 : Low, 2 : Mid, 3 : High, 4 : Auto	
3	Target Temp.	Target Temp. ¹⁾	Target Temp. ²⁾	16.0 ~ 30.0 [°C] x 10	
4	Target Temp. Limit (Upper)	Target Temp. Limit ¹⁾ (Upper)	Reserved	16.0 ~ 30.0 [°C] x 10	
5	Target Temp. Limit (Lower)	Target Temp. Limit ¹⁾ (Lower)	Reserved	16.0 ~ 30.0 [°C] x 10	
6	Reserved	Vent. Operate Mode	Reserved	0 : HEX, 1 : Auto, 2 : Normal	

1) : This register value is applied 'DX Ventilator' ONLY.

2) : This value range can be between 0 ~ 127 [°C]. And it would be limited by upper & lower value according to the setting of remote controller.

Input Register (0 x 04)

No.	Data Bit			Function	Register
	Air Conditioner	ERV / DX ERV	Hydro Kit & THERMA V		
1	Error Code	Error Code	Error Code	0 ~ 255 ※ Please refer to the product error table.	Register = N X 20 + ① (N = Indoor Unit Central Address)
2	Room Temp.	RA Temp.	Room Temp.	-99.0 ~ 99.0 [°C] x 10	
3	Pipe In Temp.	OA Temp. ¹⁾	Water Inlet Temp.	-99.0 ~ 99.0 [°C] x 10	
4	Pipe Out Temp.	SA Temp. ¹⁾	Water Outlet Temp.	-99.0 ~ 99.0 [°C] x 10	
5	Reserved	Pipe In Temp. ¹⁾	Sanitary Tank Temp.	-99.0 ~ 99.0 [°C] x 10	
6	Reserved	Pipe Out Temp. ¹⁾	Solar Temp. ²⁾	-99.0 ~ 99.0 [°C] x 10	

1) : This register value is applied 'DX Ventilator' ONLY.

2) : This register value is applied 'AWHP' ONLY.




INTEGRATION DEVICE

PDI

(POWER DISTRIBUTION INDICATOR)



PDI SHOWS DISTRIBUTED POWER CONSUMPTION OF UP TO 128 INDOOR UNITS

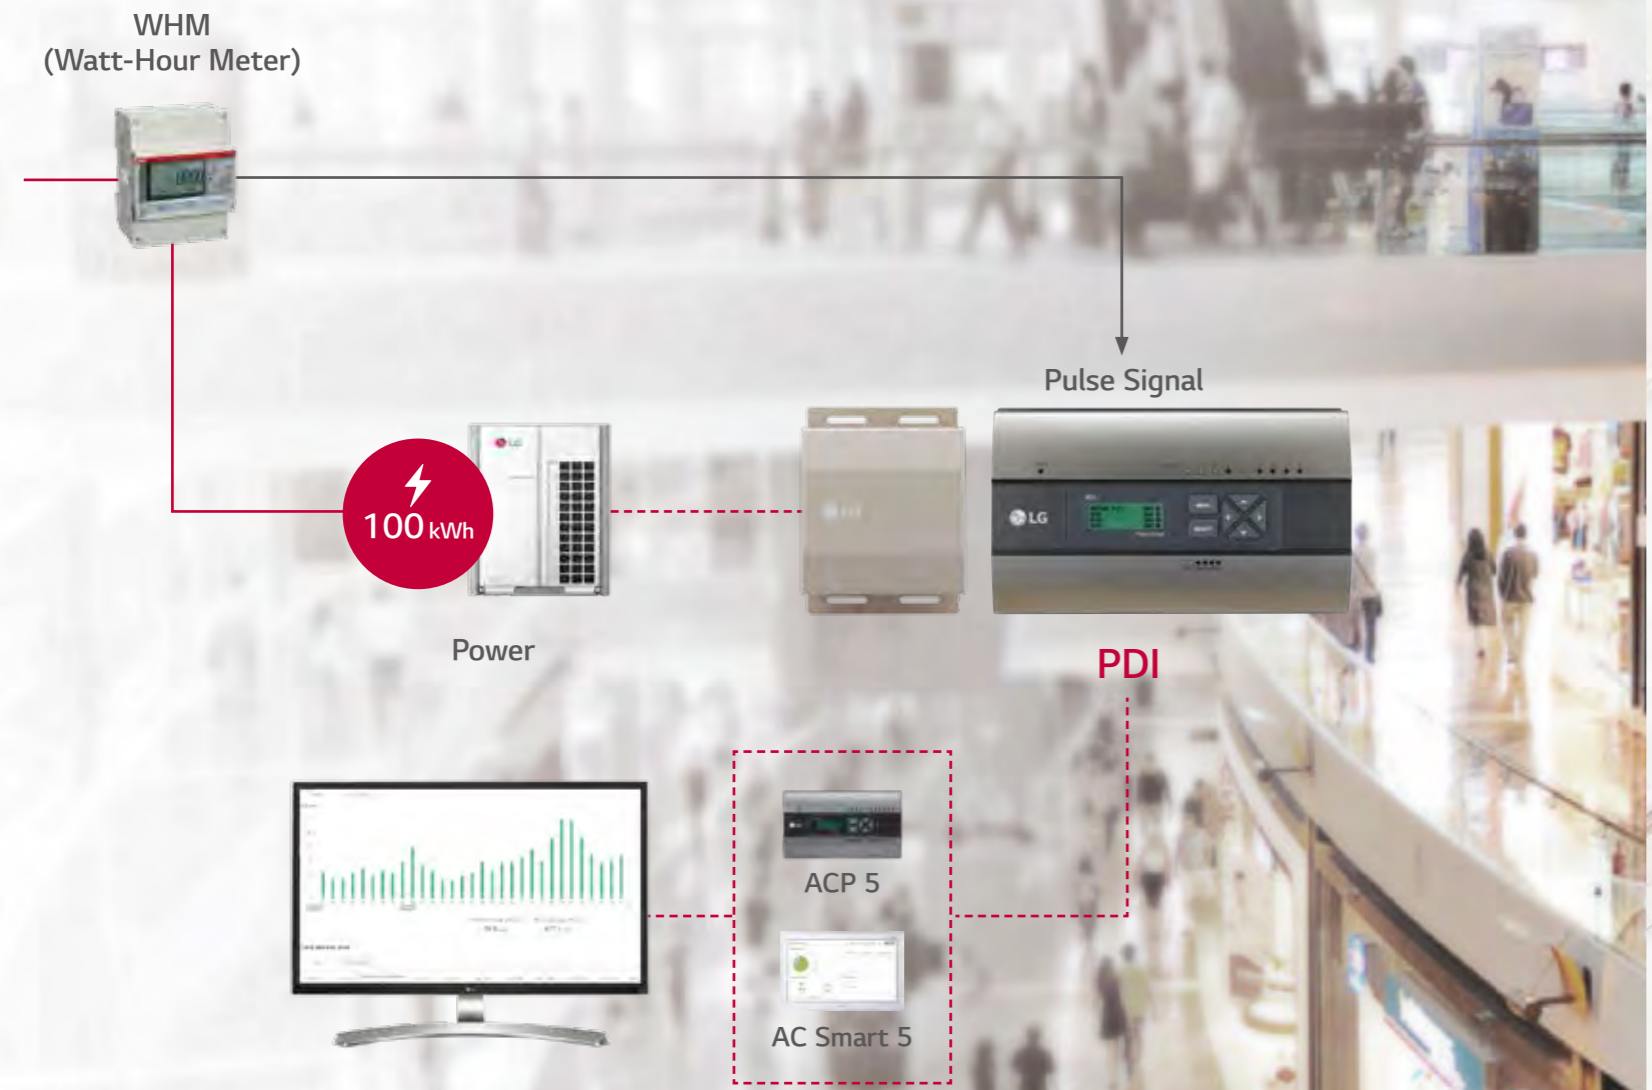

PDI

(POWER DISTRIBUTION INDICATOR)


PQNUD1S40 (Premium, 8 ports)
 PPWRDB000 (Standard, 2 ports)
 Size (W x H x D, mm) : 270 x 155 x 65



POWER SUPPLY




PDI







ENABLES TOTAL AND INDOOR POWER CONSUMPTION MONITORING

INTEGRATION DEVICE



PDI (POWER DISTRIBUTION INDICATOR)

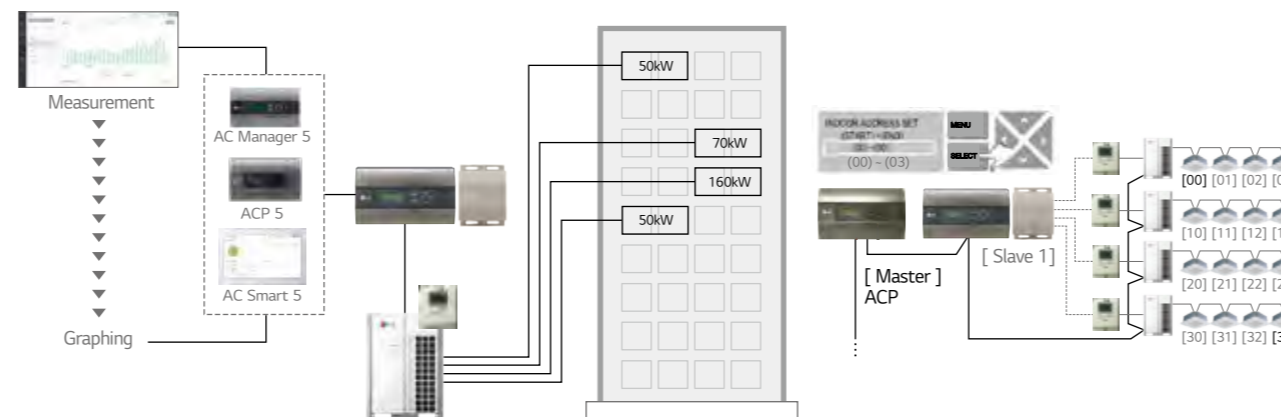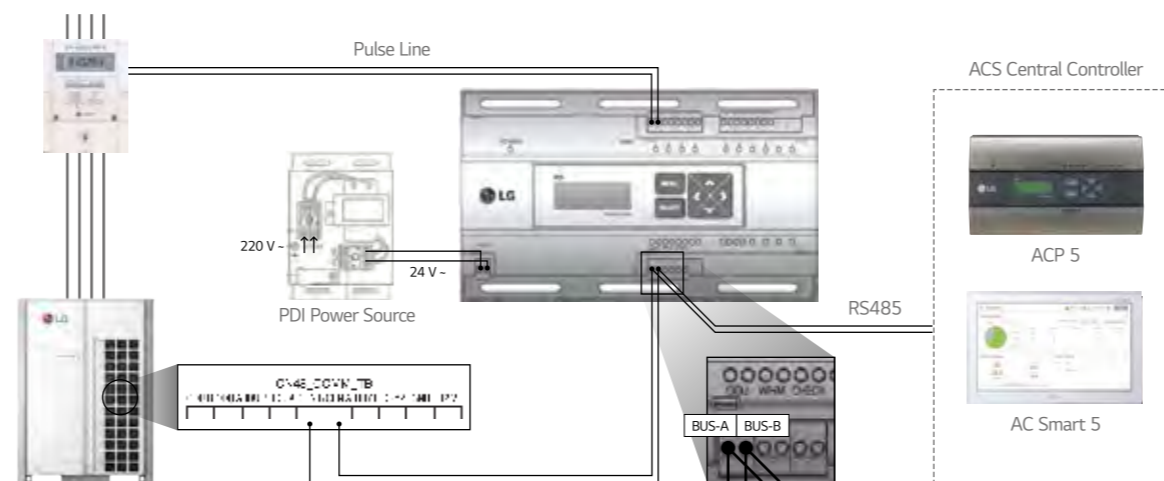

Note : 1. Power cable and type could be different from this scene depending on the Outdoor unit's specification.
 2. Measured power consumption could be different between PDI and Watt meter.
 3. Applicable Central Controller : ACP 5, ACP LonWorks, AC Smart 5, AC Ez Touch
 (Combination : we recommend to connect separated watt meter for Outdoor units to have correct power distribution value)

PQNUD1S40 (Premium, 8 ports)
 PPWRDB000 (Standard, 2 ports)

PDI shows distributed power consumption of up to 128 indoor units.




Features & Benefits


- Enables total and indoor power consumption monitoring.
- With LG central control connectivity, energy monitoring, energy savings operations and target usage setting functions are enabled.
- Enables gas consumption and electricity distribution.

Model Name	PQNUD1S40	PPWRDB000
Size (W x H x D, mm)	270 x 155 x 65	
Interfaceable Products	Air conditioner, ERV DX	
Maximum Number of Power Meters	EHP : 8 Watt meter GHP : 4 Watt meter / 4 Gas meter	EHP : 2 Watt meter GHP : 1 Watt meter / 1 Gas meter
Maximum Number of Indoor Units	MULTI V : 128	
Data Backup When Power Outage	○	
Power Input	PDI : AC 24V, Transformer : AC 220V	

※ ○ : Applied, - : Not Applied



ACS IO MODULE

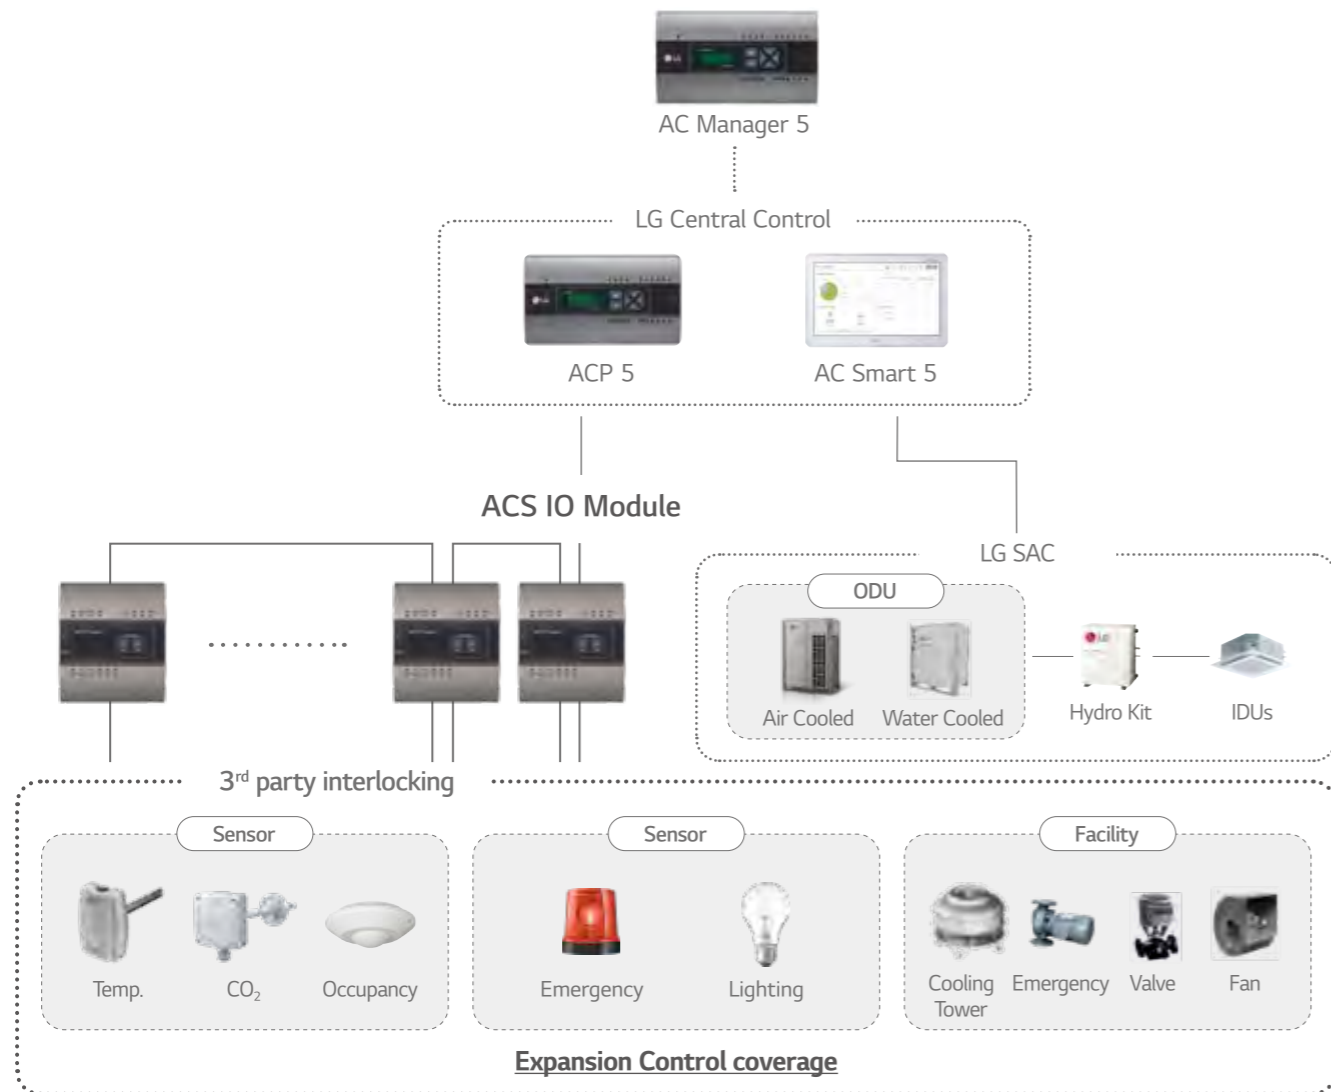


※ DI : Digital Input, DO : Digital Output, UI : Universal Input, AO : Analog Output / Please contact our regional office to have connectable relay specification for analog output

Case. 1

Parking Lot Ventilation


Turning on ventilator when CO₂ Level is high

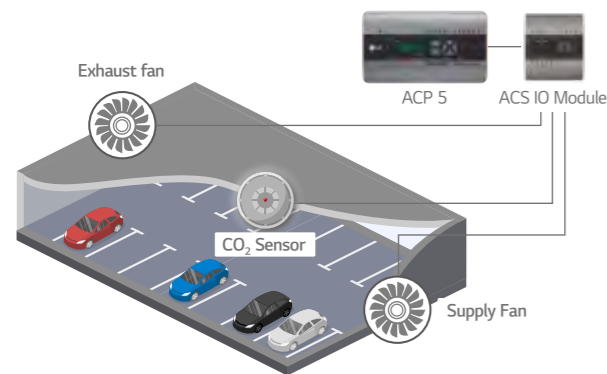

Case. 2

Auxiliary Heater

Turning on aux. heater when outside temp. is very low

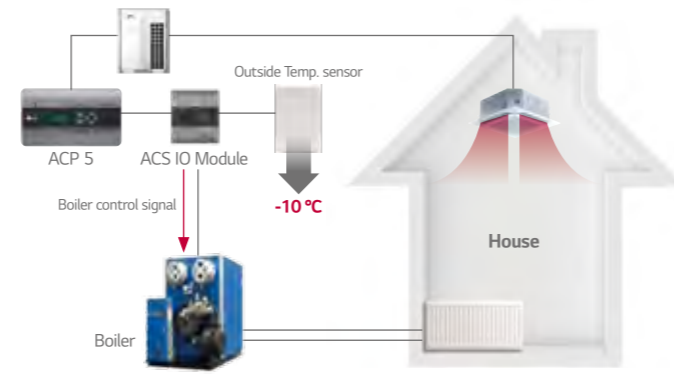

PEXPMB000

This module can be connected with ACP 5 or AC Smart 5 controller if additional I / O points such as DI / DO and AI / AO for 3rd party devices control and monitoring are needed.



Features & Benefits


- Interlocking with 3rd party equipment LG Central controller can make operation scenario with 3rd party equipment by ACS IO Module.
- Control coverage is expanded. (Air conditioner only → Sensors, Fans, Pumps, Switches ...)

Model Name	PEXPMB000	
Linkable Products	PAC55A000, PACP5A000	
Communication	RS-485	1 ch
I / O	Digital Input	3 ports
	Digital Output	3 ports
	Universal Input ¹⁾	4 ports
	Analog Output	4 ports

Value Spec	Min.	Max.	
Analog Input	NTC 10k	0.68kΩ	177kΩ
	PT 1000	803Ω	1,573Ω
	Ni 1000	871.7Ω	1,675.2Ω
	DC (Voltage)	0V	10V
	DC (Current)	0mA	20mA
Analog Output	-	0V	10V
Digital Input	Binary Input (Non Voltage)	-	-
Digital Output	Normal open	-	30VAC / 30VDC, 2A

※ ○ : Applied, - : Not Applied


1) The type of UI (Universal Input) is selectable among Digital Input and Analog Input.



ACU IO MODULE

PEXPMB300 / PEXPMB200 / PEXPMB100

This module can be connected with ACP 5 or AC Smart 5 controller if additional I / O points such as UIO / UI / UO for 3rd party devices control and monitoring are needed.

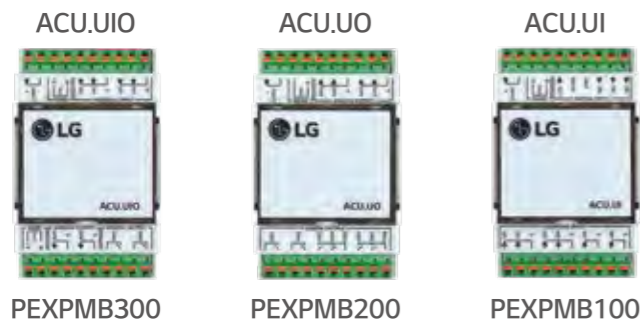


Features & Benefits

- Interlocking with 3rd party equipment LG Central controller can make operation scenario with 3rd party equipment by ACU IO Module.
- Applicable devices are expanded. (Air conditioner only → Sensors, Fans, Pumps, Switches ...)

Module Name	PEXPMB300	PEXPMB200	PEXPMB100
Linkable Products	PAC55A000, PACP5A000		
Communication RS-485	2 ch ¹⁾	1 ch	1 ch
Digital Input	-	-	3 ports
Digital Output	2 ports	6 ports	-
Universal Input ²⁾	4 ports	-	6 ports
Analog Output	2 ports	4 ports	-

Value Spec	Min.	Max.
Analog Input DC (Voltage)	0V	10V
Analog Output DC (Voltage)	0V	10V
Digital Input Binary Input (Non Voltage)	-	-
Digital Output Normal Open	-	30VDC, 1A


※ ○ : Applied, - : Not Applied
 1) 1 ch is reserved for internal communication.
 2) The type of UI (Universal Input) is selectable among Digital Input and Analog Input.



CHILLER OPTION KIT

PCHLLN000

LG central controller 5 series with Chiller Option Kit can provide LG chiller remote control and cycle monitoring.



Model Name	PCHLLN000
Monitoring Points	Evaporator status / Compressor status (Scroll, Screw, Centrifugal chiller only) / Condenser status / Generator status (Abs. chiller only)
On / Off	○
Target Temp. setting	○
Mode	Scroll chiller only
Schedule	○
Interfaceable Products	Scroll, Screw, Centrifugal, Absorption (LG Only)

※ ○ : Applied, - : Not Applied

Installation Scene


- Chiller Option Kit installation of ACP, AC Smart should be conducted by a specialized installation service engineer.
- Chiller Option Kit installation can be achieved with a SD Card.
- The SD Card can install Chiller Option Kit in one ACP, AC Smart. Insert the SD Card in the ACP, AC Smart. If a backup SD Card is inserted, replace it with a Chiller Option Kit SD Card.




Cycle Display Example

Turbo Chiller Cycle information

View all Evaporator Compressor Condenser




Mode	★ COOL	Evaporator water out temperature	30.3 °C
Operation	ON	Motor current	6 A
Evaporator			
Flow amount	ON	Saturation temperature	23.2 °C
Water in temperature	20 °C	Pressure	2.01 kgf / cm ²
Water out temperature	30.3 °C	-	-




DRY CONTACT


PDRYCB000

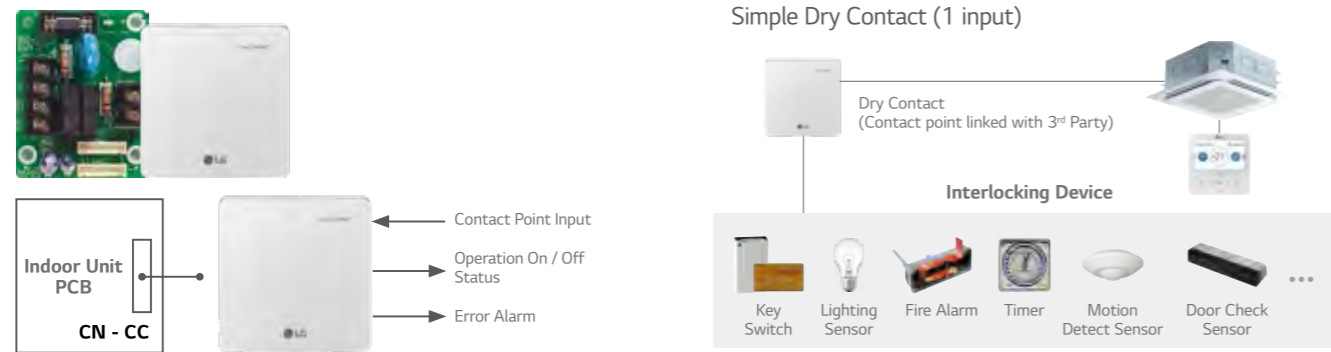

PDRYCB500

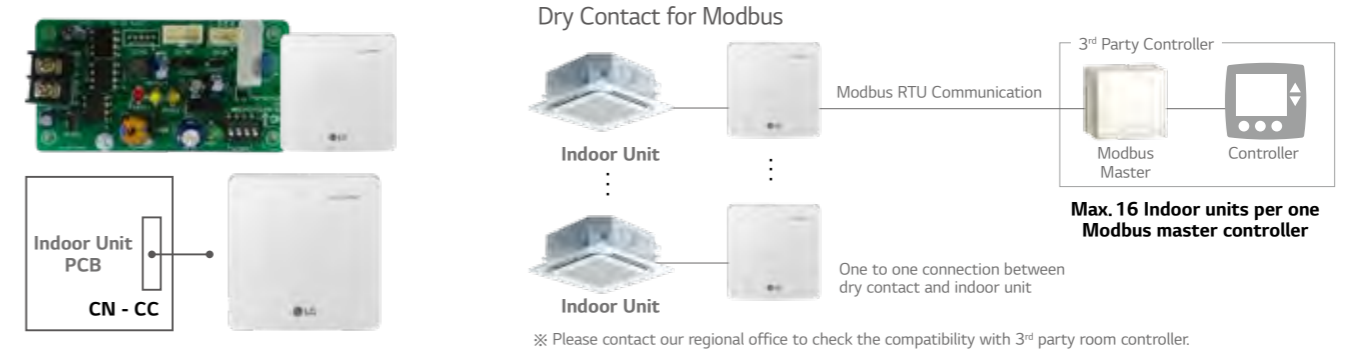

PDRYCB400

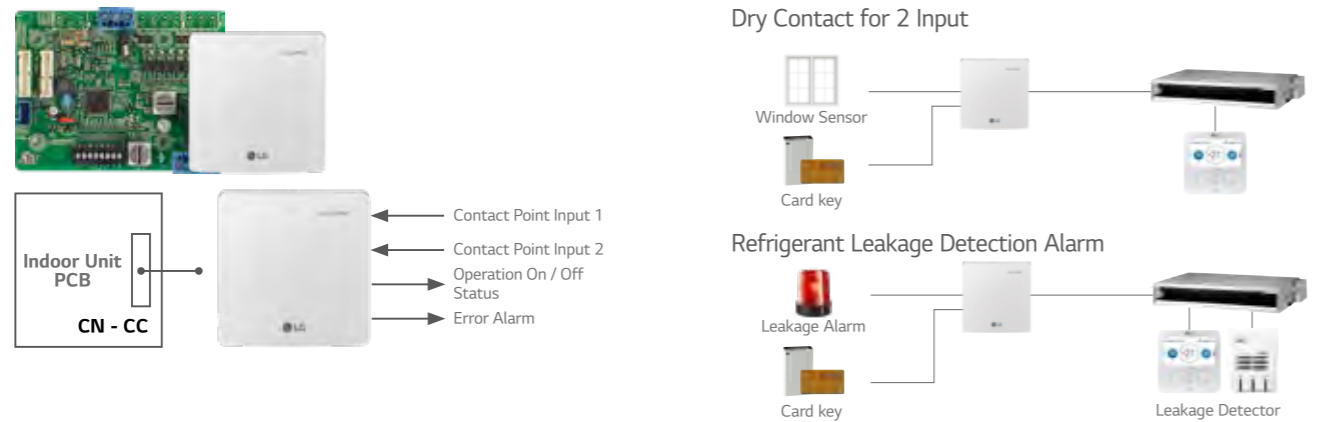

PDRYCB300 / PDRYCB320*



* Available only for PDRYCB320

※ Please contact our regional office to have full compatible room controller list.

Specification

Connection between an indoor unit and external devices to control various functions.

Model Name		PDRYCB000	PDRYCB400	PDRYCB300	PDRYCB320*	PDRYCB500
Case		○	○	○	○	○
Input Port		1	2	8	8	-
Universal Input port		-	-	-	1	-
Comm. Protocol		-	-	-	-	Modbus RTU
Power		AC 220V		Connect to Indoor unit PCB (CN_CC) : DC 12V		
IDU	On / Off	○	○	○	○	○
	Operation Mode	-	○	○	○	○
	Set Temp.	-	(Select & Fix)	(Select & Fix)	(Select & Fix)	○
	Fan Speed	-	-	○	○	○
	Thermo-Off	-	(Select & Fix)	○	○	-
	Energy Saving	-	(Select & Fix)	-	-	-
	Lock / Unlock	-	(Select & Fix)	-	-	-
	On / Off	○	-	○	○	-
	DHW On / Off	-	-	○	○	-
	Thermo-Off	-	-	○	○	-
Heating	Operation Mode	-	-	○	○	-
	Silent Mode	-	-	○	○	-
	Emergency Mode	-	-	○	○	-
	On / Off	○	-	-	-	○
ERV	Operation Mode	-	-	-	-	○
	Aircon Mode	-	-	-	-	○
	Additional Mode	-	-	-	-	○
	Fan Speed	-	-	-	-	○
Output	Operation Status	○	○	○	○	○
	Error	○	○	○	○	○
	Room Temp.	-	-	-	-	○

※ ○ : Applied, - : Not Applied


Note: 1. Compatibility of PDRYCB300 / PDRYCB320

- Can use with all types of aircon indoor units after 2010. (Cassette, Ducted, Convertible, Applied PAC, Wall mounted, Console)
- Can use with new single package AK-W model after 2020. 1Q (The previous version Single package is not compatible)
- Heating : 3 series AWHP split and Monobloc models 4 generation Hydro Kit

2. Compatibility of PDRYCB400

- Can use with all types of air conditioner indoor units after 2010. (Cassette, Ducted, Convertible, Applied PAC, Wall mounted, Console)
- Can use with new single package AK-W model after 2020. 1Q (The previous version Single package is not compatible)
- Can not use with AWHP, Hydro Kit models.

3. (Select & Fix) : This function is preset by rotary switch.



GROUP CONTROL WIRE



PZCWRCG3

Cables used to connect a wired remote controller up to 16 indoor units.



Model Name	PZCWRCG3
1 Y-type Cable	0.25m Length
2 Long Cable	9.6m Length

Installation Scene

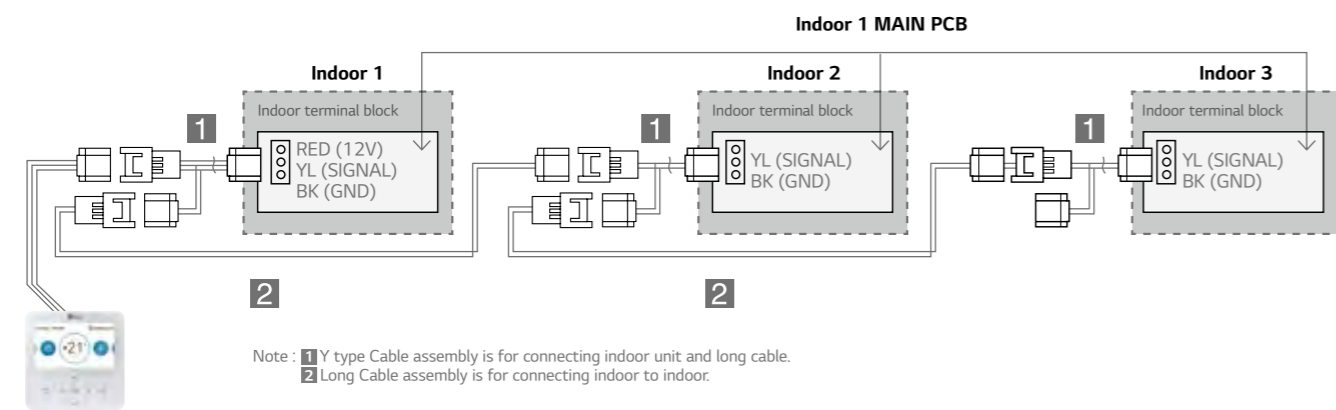

REMOTE TEMPERATURE SENSOR

PQRSTA0

Sensor for detecting the room temperature.





Features & Benefits

- It detects the exact room temperature instead of indoor unit's air temperature sensor.
- Applied to Ceiling Mounted Cassette, Ceiling Concealed Duct, THERMA V and Hydro Kit.
- Extension cable (15m) is included.

Installation Scene

1. Wire to the control box in the indoor unit by removing the existing thermistor and connect the extension cable its place.
2. Cut the extension cable to the appropriate length and connect the screw terminal of the remote sensor.

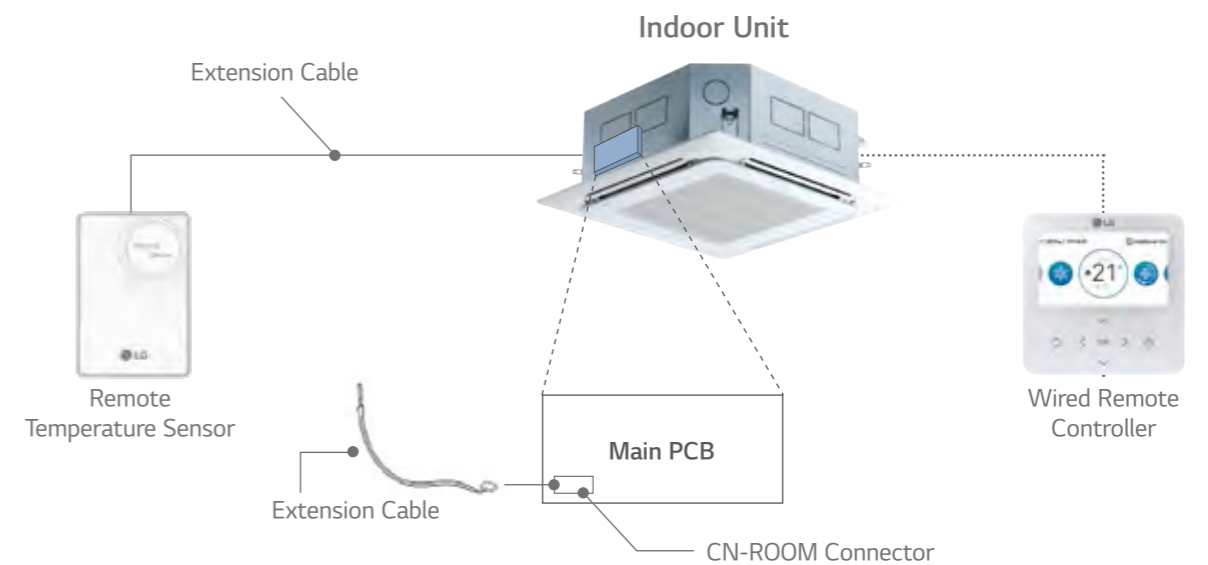




ZONE CONTROLLER

ABZCA


Controls air conditioning in up to 4 zones by external thermostat.

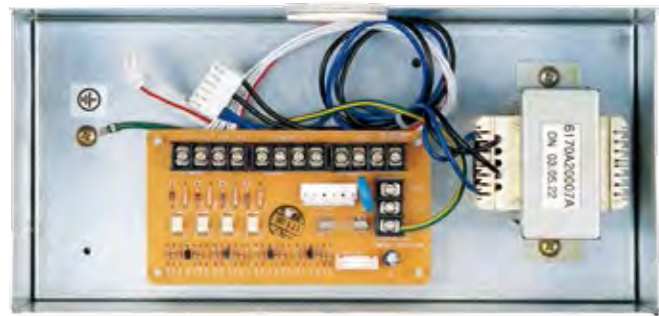

Features & Benefits

- Controls different zones (up to 4 zones) by external thermostat (AC 24V)
- Maintain proper air volume of each zone
- Auto variation of dampers
- Auto control of fan speed and On / Off operation

Installation Scene

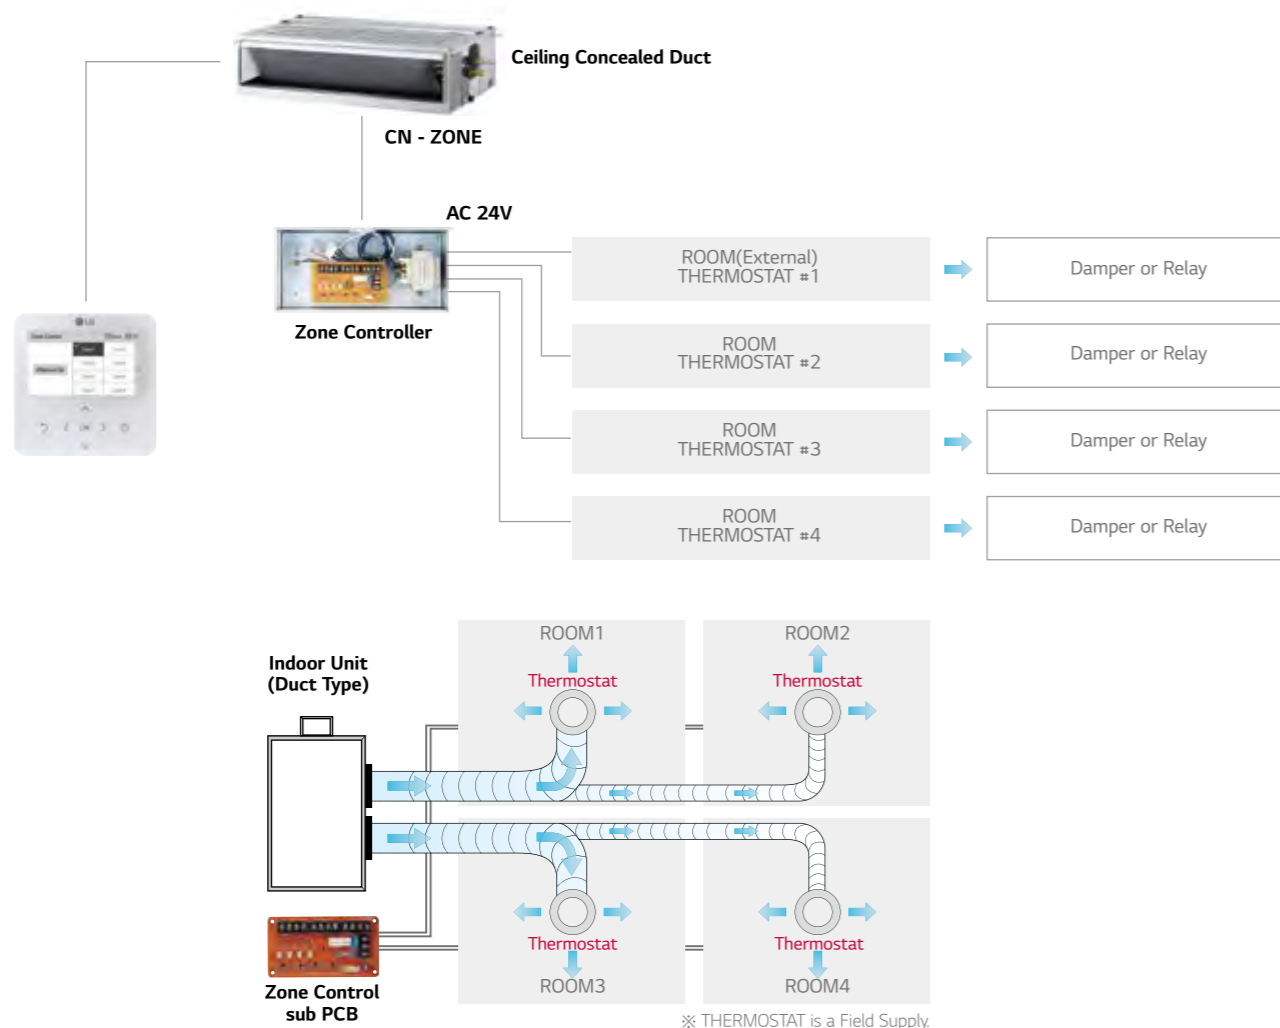

IO MODULE

PVDSMN000

Interface module between the outdoor unit of system air conditioner and the external device.



Features

Function

- Demand control
- Low noise operation
- Output outdoor or indoor unit operation status
- Output error status

Description

- IO Module is communication interface module for connection between MULTI V 5 and external IO (Input / Output Module) devices.


Models Applied


- MULTI V IV, 5
- MULTI V WATER IV
- MULTI V S

Note : IO Module is not compatible for MULTI V III and MULTI V S R32.

Part Description

- 1) Digital Input Part (DI : Dry Contact Input)
 - Demand control by contact input (3 Step)
 - Low Noise Operation input
 - Priority Setting input : Setting the priority of demand control command (Capacity control for external signal from DDC vs Peak control by LG Central controller)
 - Open : External signal has priority to central controller (Default)
 - Close : Central controller has priority to external signal
- 2) Analog Input Part (AI : DC 0 ~ 10V)
 - Demand control by analog input (10 Step)
- 3) Digital Output Part (DO : AC 250V, Max. 1A)
 - Error status relay output
 - Operation status relay output
 - Valve control

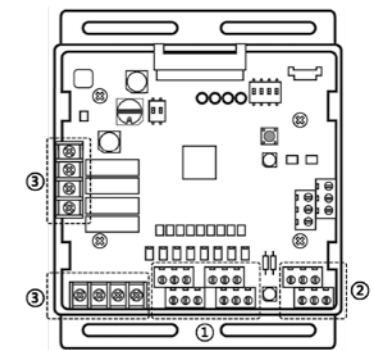




IO MODULE

ODU Capacity Control

Provides variable settings for ODU Capacity Control according to input method to reduce the power consumption. IO Module supports 2 types of input signal : Analog Inputs (0 ~ 10V, 10 steps) and contact signals (3 steps)

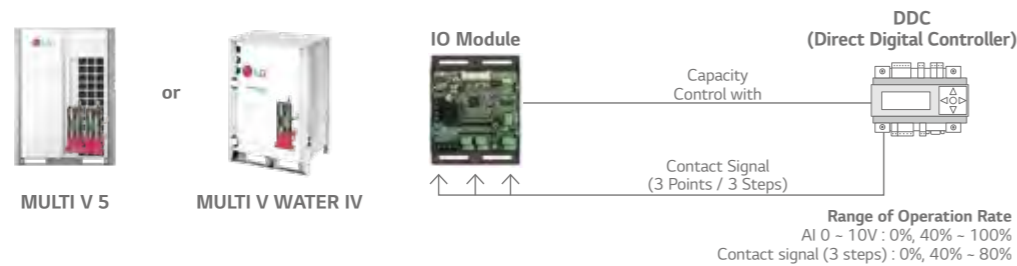

Low Noise Operation


To reduce noise level, control outdoor unit's fan speed by dry contact input.




※ 8 HP (22.4kW) model, Sound power level can be changed by outdoor unit operation status and low noise operation input signal.

Refrigerant Leakage Detection with Pump-down

For safety, IO module closes refrigerant valve when Pump-down operation.

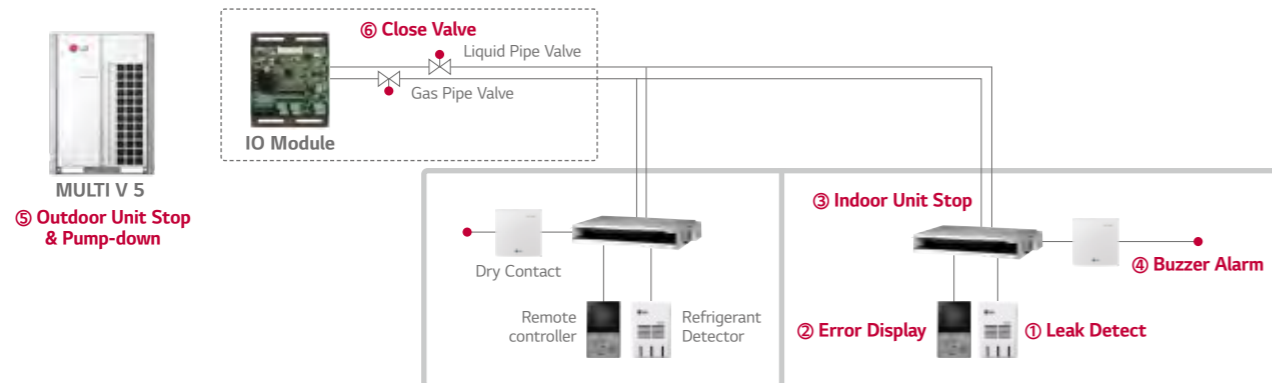

※ If the concentration of the refrigerant in the air exceeds 6,000 ppm more than 5 seconds, the function will be activated. (Refer to operation sequence which written in red, 1-6)



VARIABLE WATER FLOW CONTROL KIT

PWFCKN000 (MULTI V WATER IV)

Accessory for controlling the water flow.



Features

Function


- Water pump or valve control (0 ~ 10V)
- Minimum output voltage setting available
- Operation, error output (AC 250V, Max. 1A)
- Dry contact input and analog output for demand control
- Digital output for operation, error status (AC 250V, Max. 1A)


Description

- Water flow consumption reduction
- Pump electricity consumption reduction
- Including IO Module (Dry contact input, Analog input / output, Digital output)
- Using Dry contact and variable water flow control function simultaneously.

Installation Scene

- Flow Control Valve : Regulates the flow or pressure of a fluid, normally responding to signals generated by independent devices.
- Flow Meter : Measures mass flow rate of a fluid traveling through a tube. (The mass flow rate is the mass of the fluid traveling past a fixed point per unit time.)
- Pressure Sensor : Measures the pressure.

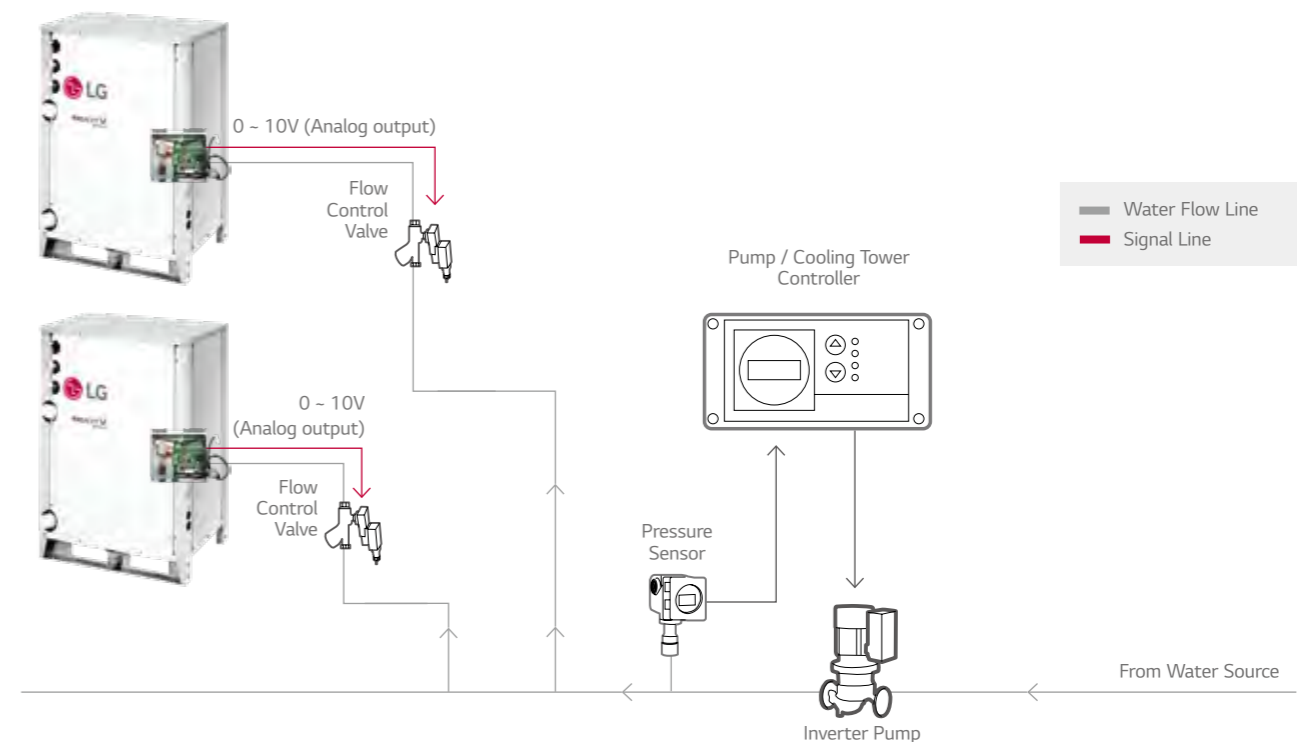



LOW AMBIENT KIT

PRVC2

External integration module for cooling operation with -25 °C low ambient temperature.



Features

Function

- 25 °C Low ambient cooling operation by Low ambient kit and hood with damper (Analog output 0 ~ 10V)
- Demand control
- Low noise operation
- Output outdoor or indoor unit operation status (AC 250V, Max. 1A)
- Output error status (AC 250V, Max. 1A)


Description

- Low ambient kit supports -25 °C cooling operation by making stable condensing pressure with reducing air flow rate from hood and damper control given 0 ~ 10V proportional to condensing pressure.
- Low ambient kit provides IO Module function.
- External snow hood and air damper are required for this item.
- Transformer and terminal block are included.

Models Applied


- MULTI V 5

Installation Scene

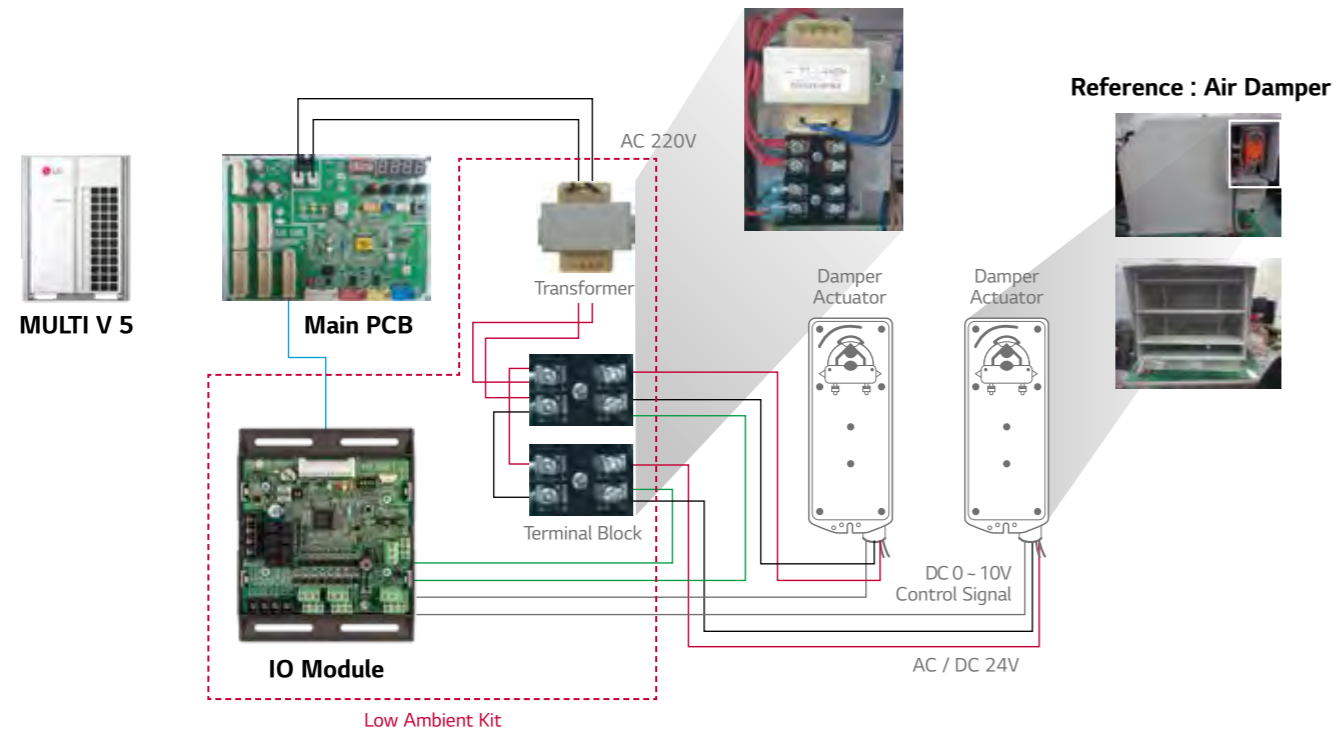

Note

1. Damper Actuator can accept only DC 24V power input.
2. Do not input AC power. Otherwise it will cause a serious damage.
3. The IO Module can control maximum three actuators.
4. Case of one valve, the slave signal connector must not use.
5. The power (AC / DC 24V) and signal (DC 0 ~ 10V) line is recommended by AWG22 (1/32 in, (0.644 mm), 0.016 Ω / ft (0.053 Ω / m)).



COOL / HEAT SELECTOR

PRDSBM

Cooling only, heating only, and fan mode can be selected.




Features


- Indoor unit mode control without central controller.
- Select operation mode : Cooling, Heating, Fan mode
- Mode lock for cooling & heating mixing error-proof during the change of season.


Models Applied

- MULTI V 5
- MULTI V 4
- MULTI V WATER S
- MULTI V WATER II
- MULTI V S
- MULTI V PLUS II, MULTI V PLUS
- MULTI V WATER IV

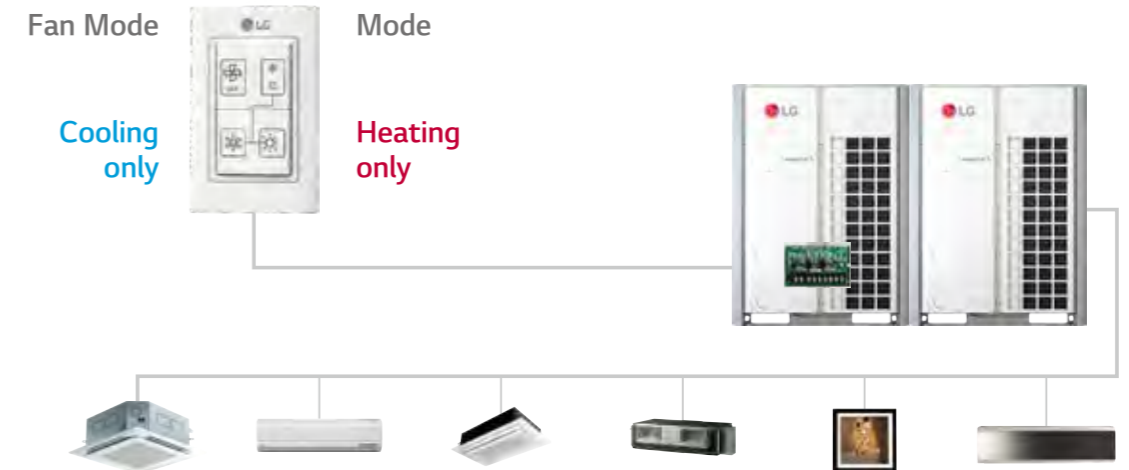

Installation Scene

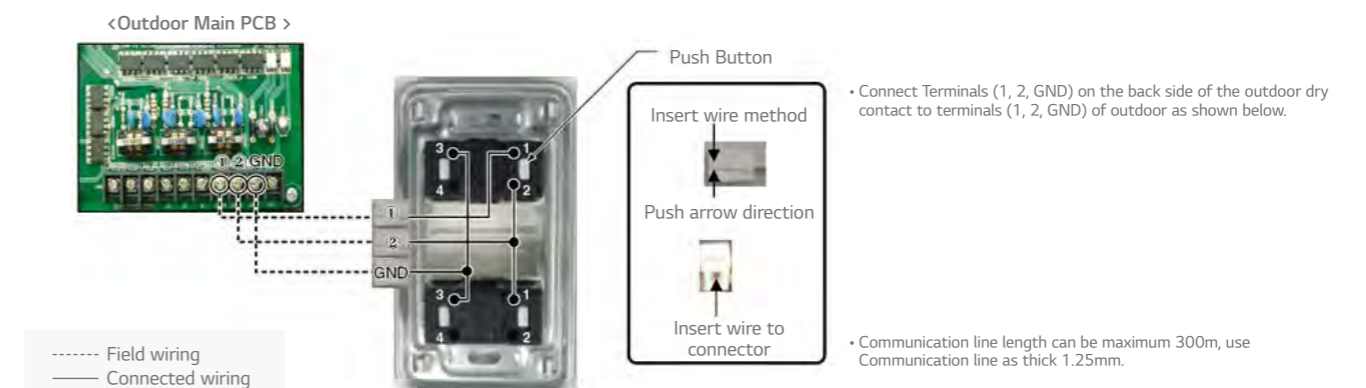




AHU KIT

A solution to connect LG's high efficiency system to the DX coil of an air handling unit for the maximum energy savings.

COMMUNICATION KIT




PAHCMR000



PAHCMS000

CONTROL KIT



PAHCNM000


EEV KIT



PRLK048A0
PRLK096A0



PRLK396A0



PRLK594A0

CONTROLLER MODULE



PAHCMM000



PAHCMC000

Specifications

Control Application Kit

Type	Model	Dimensions (mm)			Power Supply	IP Rating	Description
		W	H	D			
Communication Kit	PAHCMR000	300	300	155	1Ø, 220 ~ 240 V, 50 / 60 Hz	IP66	Return / Room air temperature control by DDC or LG individual / centralized controller
	PAHCMS000	380	300	155	1Ø, 220 ~ 240 V, 50 / 60 Hz	IP66	Discharge air / Supply air temperature control by DDC or LG individual / centralized controller
Controller Module	PAHCMM000	162	90	61	DC 12V	IP20	Main Controller module
	PAHCMC000	108	90	61	DC 12V	IP20	Communication Controller module
Control Kit	PAHCNM000	500	500	210	1Ø, 220 ~ 240 V, 50 / 60 Hz		Various AHU control functions with multiple DX coils (Maximum connectable ODU is 3 units)

Expansion Application Kit

Type	Model	Dimensions (mm)			Pipe Diameter (mm)	Capacity Index Range
		W	H	D	Liquid	
EEV Kit	PRLK048A0	217	404	83	12.7	3.6 ~ 28 kW
	PRLK096A0	217	404	83	12.7	28.1 ~ 56 kW
	PRLK396A0	349.5	345.5	180	19.05	56.1 ~ 112 kW
	PRLK594A0	409.5	345.5	180	19.05	112.1 ~ 168 kW

Communication Kit

High Energy Efficiency

LG's DX AHU solutions' superior performance provides a highly efficient heat source system.

- High energy efficiency inverter system
- Large range of expansion application Kit : Max. 168 kW EEV Kit ¹⁾
- Connected to various heat sources : MULTI V, MULTI V WATER, MULTI V S, SINGLE SPLIT

1) Maximum connectable EEV capacity for PAHCMR000, PAHCMS000 is 112 kW.





Diverse Options for Control

AHU communication kit can be connected to various control systems such as LG individual / central controller and DDC ¹⁾. It can be directly connected to DDC without separated controller, so DDC can receive product control and monitor information through contact signal or Modbus protocol.

- LG Individual / Central controller supported
 - LG controller stand alone or combination with DDC
- Direct wiring between DDC and AHU communication kit
 - Embedded Digital I / O and Analog Input
 - Modbus RTU protocol supported

1) DDC : Direct Digital Controller

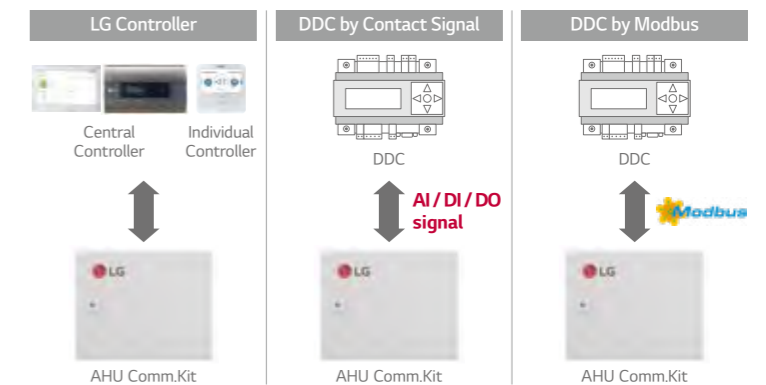




AHU KIT

Communication Kit

Expandable System Design

LG AHU system can be a suitable solution for various sites due to its application flexibility and wide range of line up with large capacity models. According to the required capacity, a single or multiple module combination is possible due to the AHU communication kit's modular design.


- Multiple module combination for large capacity AHU

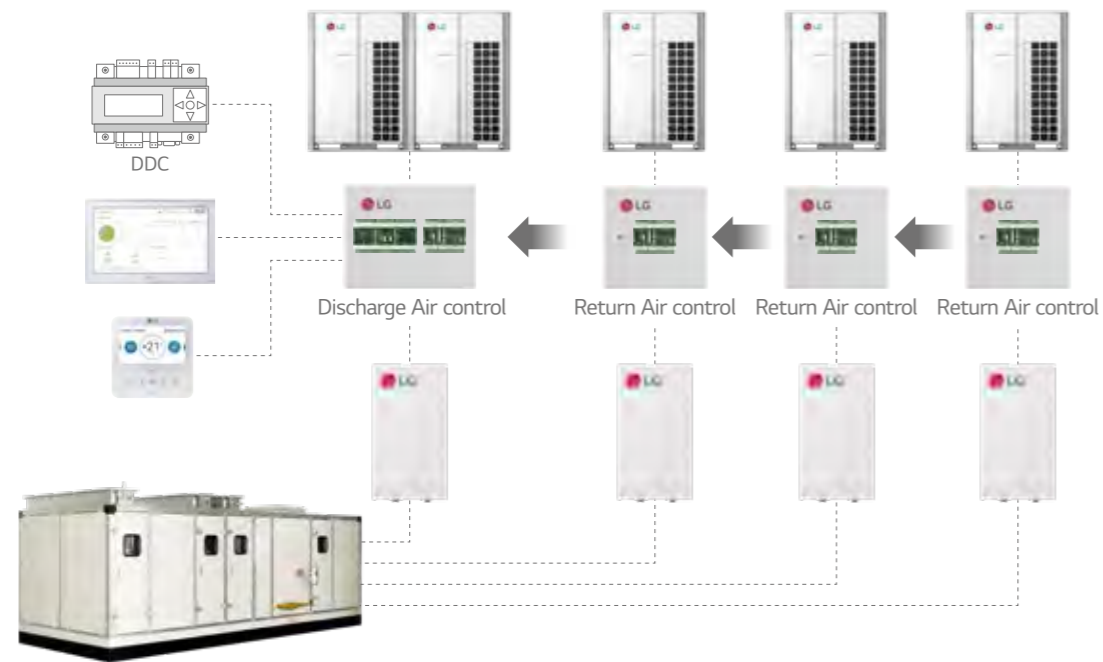


Communication Kit & Controller Module

Single Split Application

Single Split + Return / Room Air Temperature Control

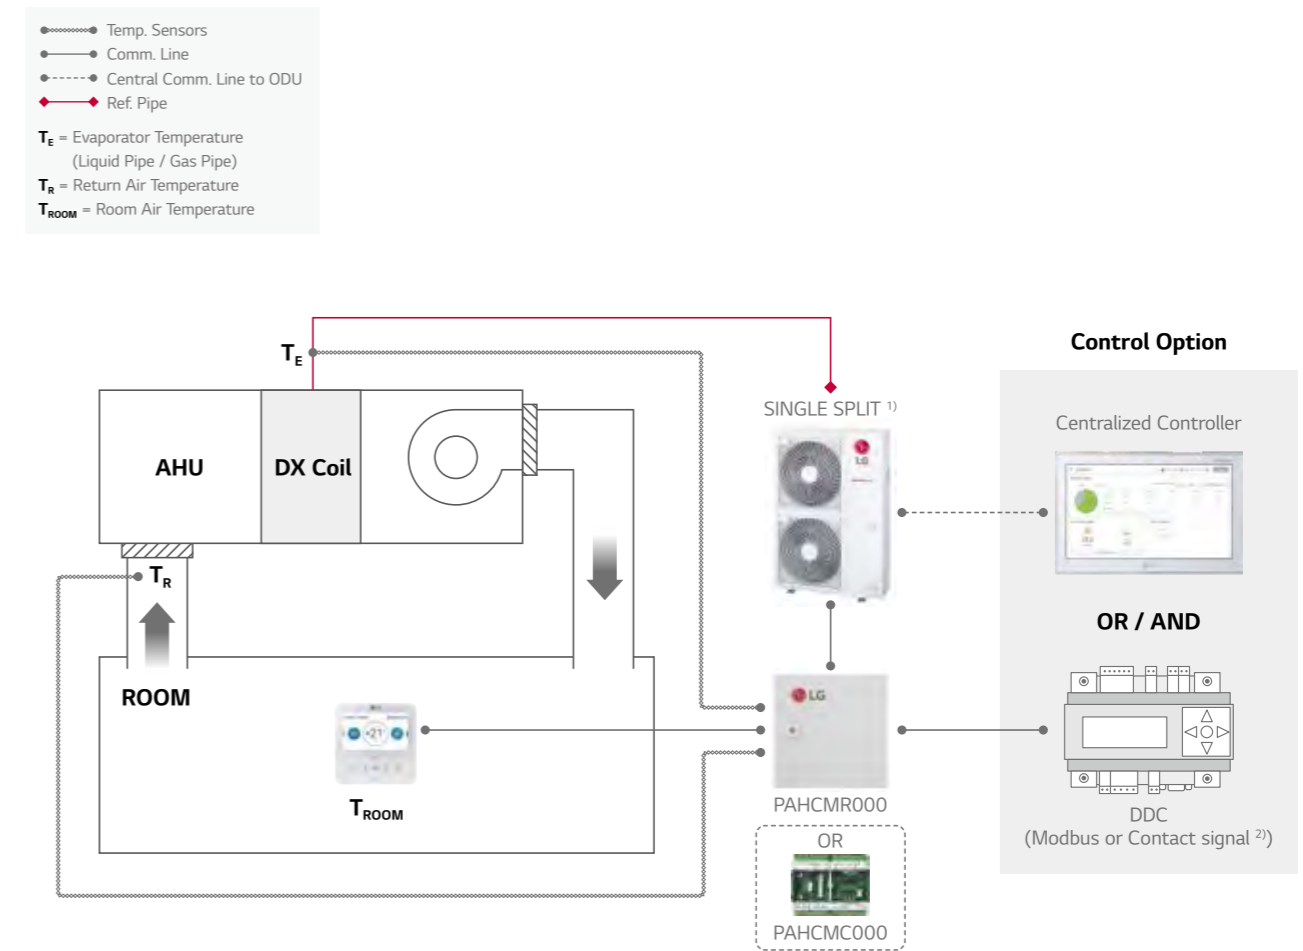

1) PI485 (PMNFP14A1) is required for centralized controller.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note : For more detail, please refer to the PDB.





AHU KIT

Communication Kit & Controller Module

Single Split Application

Single Split + Discharge Air Temperature Control

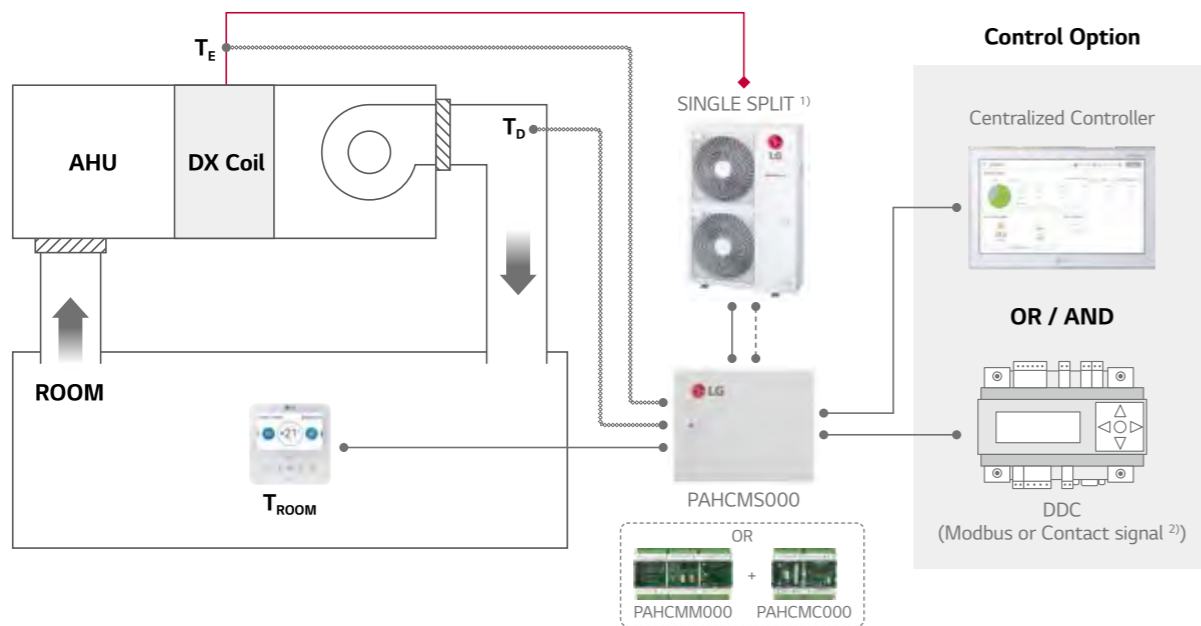



1) PI485 (PMNFP14A1) is required for centralized controller.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note : For more detail, please refer to the PDB.


Communication Kit & Controller Module

MULTI V Application

MULTI V + EEV Kit + IDU + Return / Room Air Temperature Control

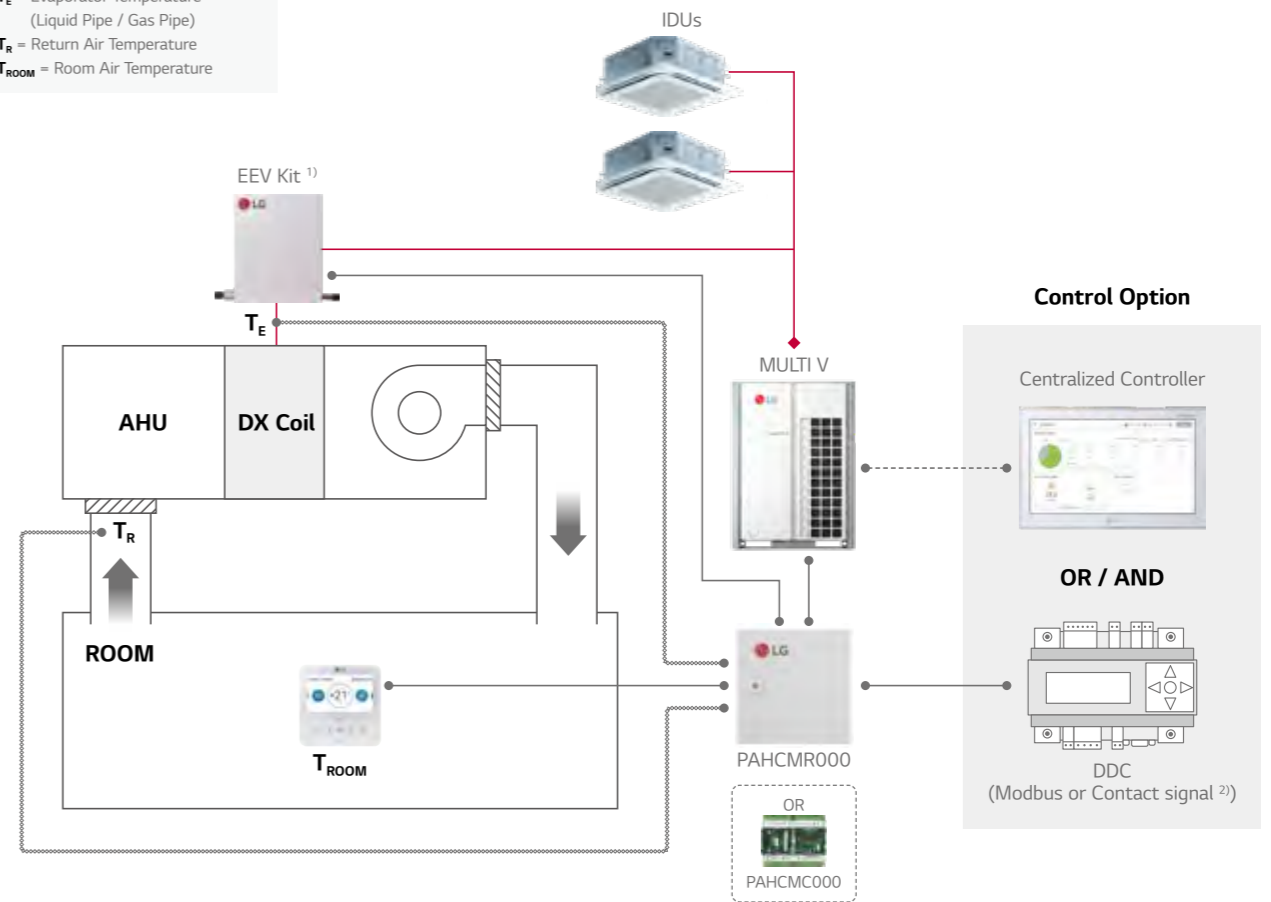

1) Multiple EEV kits can be applicable with multiple DX Coils and PAHCMR000s.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note : For more detail, please refer to the PDB.




AHU KIT

Communication Kit & Controller Module

MULTI V Application

MULTI V + EEV Kit + Discharge Air Temperature Control

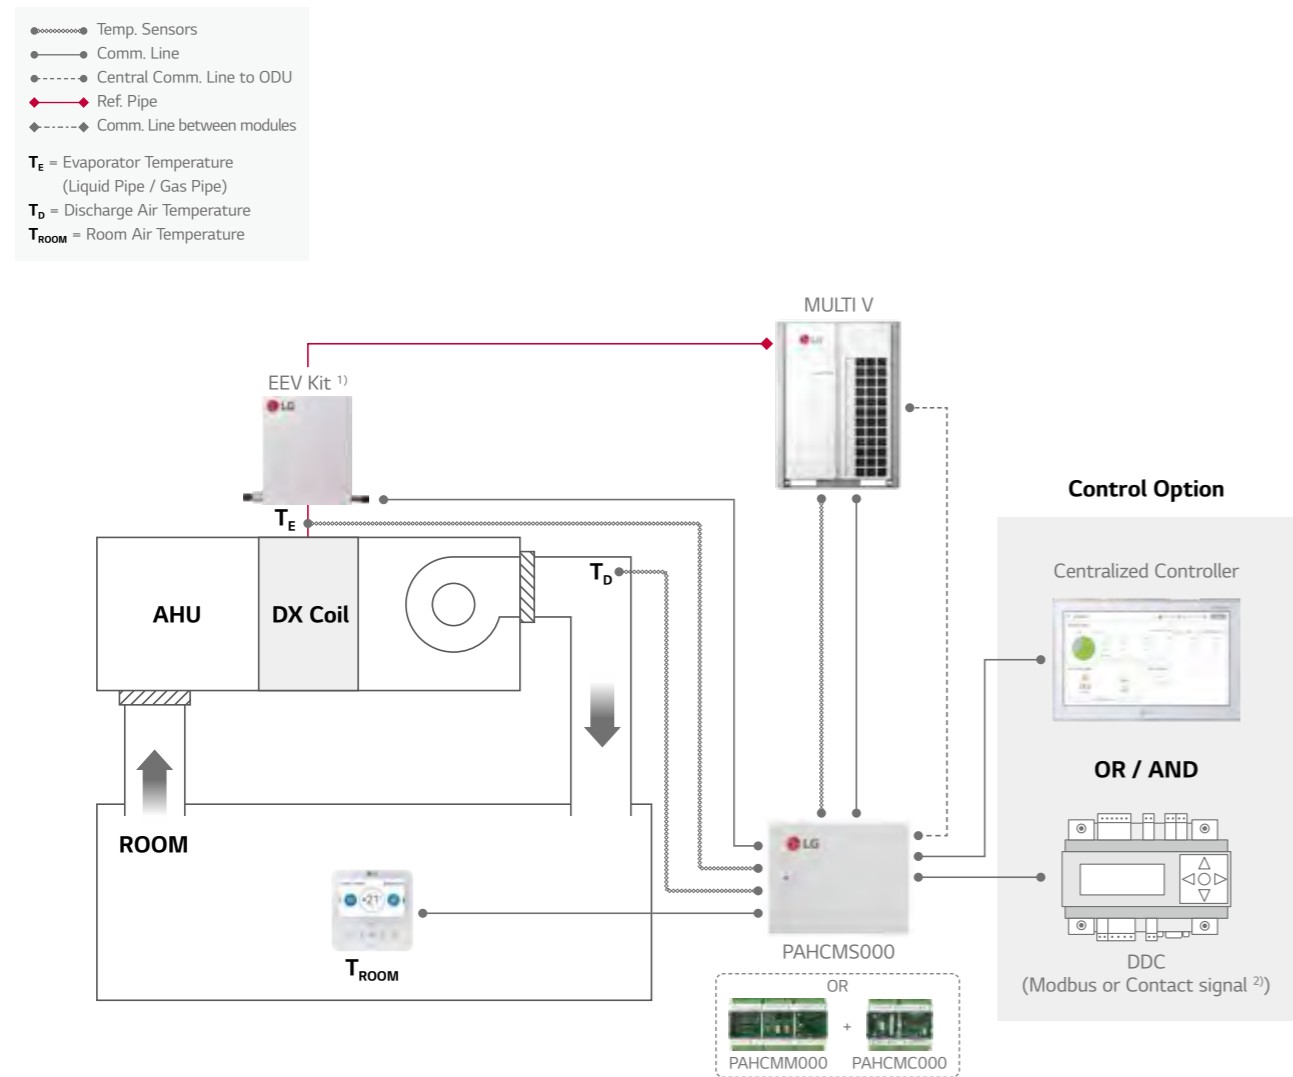

1) Multiple EEV kits can be applicable with multiple DX Coils and PAHCMR000s.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note : For more detail, please refer to the PDB.

Communication Kit Function

Communication with DDC via Contact Signal


Function List	PAHCMR000 (PAHCMC000)	PAHCS000 (PAHCM000 + PAHCMC000)	Type	Note
Operation On / Off	On / Off	On / Off	Digital Input (Non Voltage)	-
Operation Mode	Cooling / Heating	Cooling / Heating	Digital Input (Non Voltage)	Available operation mode can vary depending on the settings of Communication Kit
Return (Room) Air Temperature ²⁾	16 ~ 30 °C	-	Analog Input (DC 0 ~ 10 V / 20mA)	-
Control ¹⁾ Discharge Air Temperature ²⁾	-	-	-	Discharge air temperature should be controller directly by DDC using 'ODU Capacity Control'
Fan Speed ³⁾	-	High / Middle / Low	Digital Input (Non Voltage)	-
Forced Thermal	On / Off	-	Digital Input (Non Voltage)	-
ODU Capacity	-	10 ~ 100%	Analog Input (DC 0 ~ 10 V / 20mA)	-
Emergency Stop	-	Stop / Normal	Digital Input (Non Voltage)	-
Monitor Operation	On / Off	On / Off	Digital Output (Max : DC 30 V / 1 A, AC 250V / 1 A)	For PACHMR000, dip sw1-3 DO Type should be set 'Off' (Status), In this case, 'fan speed' cannot be monitored by DO ports
Operation Mode	-	-	-	It needs to be checked through control signal
Fan Speed	High / Middle / Low	High / Middle / Low	Digital Output (Max : DC 30 V / 1 A, AC 250V / 1 A)	For PACHMR000, dip sw1-3 DO Type should be set 'On' (Fan Mode) In this case, 'On / Off, defrost, error Status' cannot be monitored by DO ports
Defrost Operation	Defrost / Normal	Defrost / Normal	Digital Output (Max : DC 30 V / 1 A, AC 250V / 1 A)	For PACHMR000, dip sw1-3 DO type should be set 'OFF' (Status), In this case, 'fan speed' cannot be monitored by DO ports
Error Alarm	Error / Normal	Error / Normal	Digital Output, Relay C contact (Max : DC 30 V / 1 A, AC 250V / 1 A)	-
Compressor On / Off	-	On / Off	Digital Output, (Max : DC 30 V / 1 A, AC 250V / 1 A)	-

1) Control functions for LG individual and central controller are not available in case of using together with DDC via contact signal.
 2) The range of temp. is differ depending on the type of the controller.
 3) To control fan speeds, DO port of the fan speed status should be connected to the fan control panel.
 Note : For more detail information, please refer to the product data book.

Communication with DDC via Modbus protocol

Function List	PAHCMR000 (PAHCMC000)	PAHCS000 (PAHCM000 + PAHCMC000)	Note
Operation On / Off	On / Off	On / Off	
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	
Return (Room) Air Temperature	16 ~ 30 °C	-	
Control ¹⁾ Discharge Air Temperature ²⁾	-	○	Dip SW1-2 Discharge Temp. Control Type should be set 'On' Standard II : 16 ~ 30 °C Standard III ⁴⁾ : 12 ~ 50 °C
Fan Speed ³⁾	High / Middle / Low	-	
Forced Thermal On / Off	-	-	
ODU Capacity Control ²⁾	-	10 ~ 100%	Dip SW1-2 Discharge Temp. Control Type should be set 'On'
Emergency Stop	-	-	
Monitor Operation	On / Off	On / Off	
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	
Return (Room) Air Temperature	○	-	Corresponding air temperature sensor connected to AHU Comm.Kit is required
Discharge Air Temperature	-	○	
Fan Speed	High / Middle / Low	High / Middle / Low	
Defrost Operation	Defrost / Normal	Defrost / Normal	
Error Alarm	Error / Normal, Error code	Error / Normal, Error code	
Compressor On / Off	On / Off	On / Off	

※ ○ : Applied, - : Not Applied
 1) Control functions for LG individual and central controller are not available in case of using together with DDC via contact signal.
 2) In case of PAHCS000, control type between "Discharge Air Temperature" and "ODU Capacity Control" is selectable.
 3) To control fan speeds, DO port of the fan speed status should be connected to the fan control panel.
 4) Standard III wired remote controller after version 2.10.5a.
 Note : For the Modbus memory map and more detail information, please refer to the product data book.



AHU KIT

Communication Kit Function

With LG Control System (Individual & Centralized Controller)

Function List	PAHCMR000 (PAHCMC000)	PAHCMS000 (PAHCMM000 + PAHCMC000)	Note
Operation On / Off	On / Off	On / Off	-
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	Available operation mode can vary depending on the settings of Communication Kit
Control ¹⁾ Return (Room) Air Temperature ²⁾	16 ~ 30 °C	-	-
Discharge Air Temperature ²⁾	-	○	Standard II : 16 ~ 30 °C Standard III ⁴⁾ : 12 ~ 50 °C Central Controllers : 12 ~ 50 °C
Fan Speed ³⁾	High / Mid / Low	High / Mid / Low	To control the AHU fan, dip switch 1-3 'DO type' should be set 'On (Fan Speed)' (PAHCMR000)
Monitor Operation	On / Off	On / Off	-
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	-
Return (Room) Air Temperature	○	-	-
Discharge Air Temperature	-	○	Standard II : 11 ~ 39.5 °C Standard III ⁴⁾ : 0 ~ 100.0 °C Central : -50.0 ~ 100.0 °C
Fan Speed	High / Middle / Low	High / Middle / Low	-
Defrost Operation	On / Off	On / Off	Only with Individual Controller
Error Alarm	Error Code	Error Code	Error code will be displayed on the screen
Compressor On / Off	On / Off	On / Off	Only with Individual Controller

※ ○ : Applied, - : Not Applied

1) Control functions for LG individual and central controller are not available in case of using together with DDC via contact signal.

2) The range of setting temperature is different depending on the type of the controllers. And operation may differ from setting range.

3) To control fan speeds, DO port of the fan speed status should be connected to the fan control panel.

4) Standard III wired remote controller after version 2.10.5a.

Note : For more detail information, please refer to the product data book.

Compatibility with LG HVAC Controllers

Controller	Individual Controller			Centralized Controller					BMS Gateway	PDI
	Premium	Standard III	Standard II	AC Ez	AC Ez Touch	AC Smart 5	ACP 5	AC Manager 5 ¹⁾	ACP LonWorks	Premium Standard
Model no.	PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTB100	PREMTB001	PQCSZ250S0	PACEZA000	PACSSA000	PACP5A000	PACM5A000	PLNWKB000	PQNUD1S40 PPWRDB000
PAHCMR000	○	○	○	○	○	○	○	○	○	○
PAHCMS000	-	○ ²⁾	○	-	-	○	○	○	-	-

※ ○ : Applied, - : Not Applied

1) AC Manager 5 is an integrator, so the installation with AC Smart 5 or ACP 5 is required.

2) Set temperature range of this model shall be extended April, 2020.

Note : 1. Dry contact for indoor unit (PDRYCB000 / 400 / 300 / 500) is not applied.

2. For more details, please refer to the product data book.

Outdoor Unit Compatibility

For Small Size Application (~ 15kW) - Single Split

Type	Model	UUA1 (2.5 ~ 5.0 kW) ¹⁾	UUB1 (5.0 ~ 8.0 kW) ¹⁾	UUC1 (7.1 ~ 10.0 kW) ¹⁾	UUD1 / UUD3 (10.0 ~ 15.0 kW) ¹⁾
Communication Kit (Controller Module)	PAHCMR000 (PAHCMC000)	-	○	○	○
	PAHCMS000 (PAHCMM000 + PAHCMC000)	-	○	○	○
Control Kit	PAHCNM000	-	-	-	-

1) When connecting to Single Split outdoor unit, please check the compatibility to the regional sales office.

For Medium-Large Size Application (~ 672 kW) - MULTI V

Type	Model	MULTI V				MULTI V WATER	
		S	IV	III	S	IV	II
Communication Kit (Controller Module)	PAHCMR000 (PAHCMC000)	○	○	○	○	○	○
	PAHCMS000 (PAHCMM000 + PAHCMC000)	○	○	○	○	○	○
Control Kit	PAHCNM000	○	○	○	○	○	○

EEV Kit Compatibility


EEV Kit Model	Capacity index (kW)		AHU Application Kits (Maximum connectable EEV Kits)			Connection by ODU system		
	Min.	Max.	PAHCMR000 (PAHCMC000)	PAHCMS000 (PAHCMM000 + PAHCMC000)	PAHCNM000	MULTI V		Single Split
						Heat Pump	Heat Recovery	
PRLK048A0	3.6	28	○ (1)	○ (1)	○ (6)	○	○	-
PRLK096A0	28.1	56	○ (1)	○ (1)	○ (6)	○	○ (Max. 33.7 kW)	-
PRLK396A0	56.1	112	○ (1)	○ (1)	○ (6)	○	-	-
PRLK594A0	112.1	168	-	○ (1)	○ (3)	○	-	-

※ ○ : Applied, - : Not applied

Note 1. Table of the outdoor unit compatibility is based on European regional model.

2. When connecting outdoor units in other areas, please check whether they are compatible or not.

3. Expansion application kit compatibility is based on capacity index of the system, it may changed according to system design condition.





AHU KIT

Control Kit

Field Supplied Item

List	Required Specification	Apply Location
Temperature / Humidity Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Temperature range : -40 °C ~ 70 °C - Humidity range : 0 ~ 95 % RH	Supply air duct, Return air duct, Outdoor air duct
Temperature Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Temperature range : -50 °C ~ 50 °C	Supply air duct, Return air duct, Mixed air duct
Damper Actuator	- Power : AC 24 V - Input / output signal : DC 0 ~ 10 V - Torque : 15 Nm - Operation time : 150 s - Rotation Angle : 90°	Outdoor air damper, Exhaust air damper, Mixed damper
Filter Differential Pressure Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Range : 0 ~ 1,000 Pa - Switch type : Relay open / close	Filter
Static Pressure Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Range : 0 ~ 1,000 Pa	Supply air duct
CO ₂ Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Range : 0 ~ 2,000 ppm	Return air duct
Smoke Detector	- Power : AC 24 V - Type : Contact	Return air duct

Various Control with Control Kit – Multiple MULTI V + EEV Kits

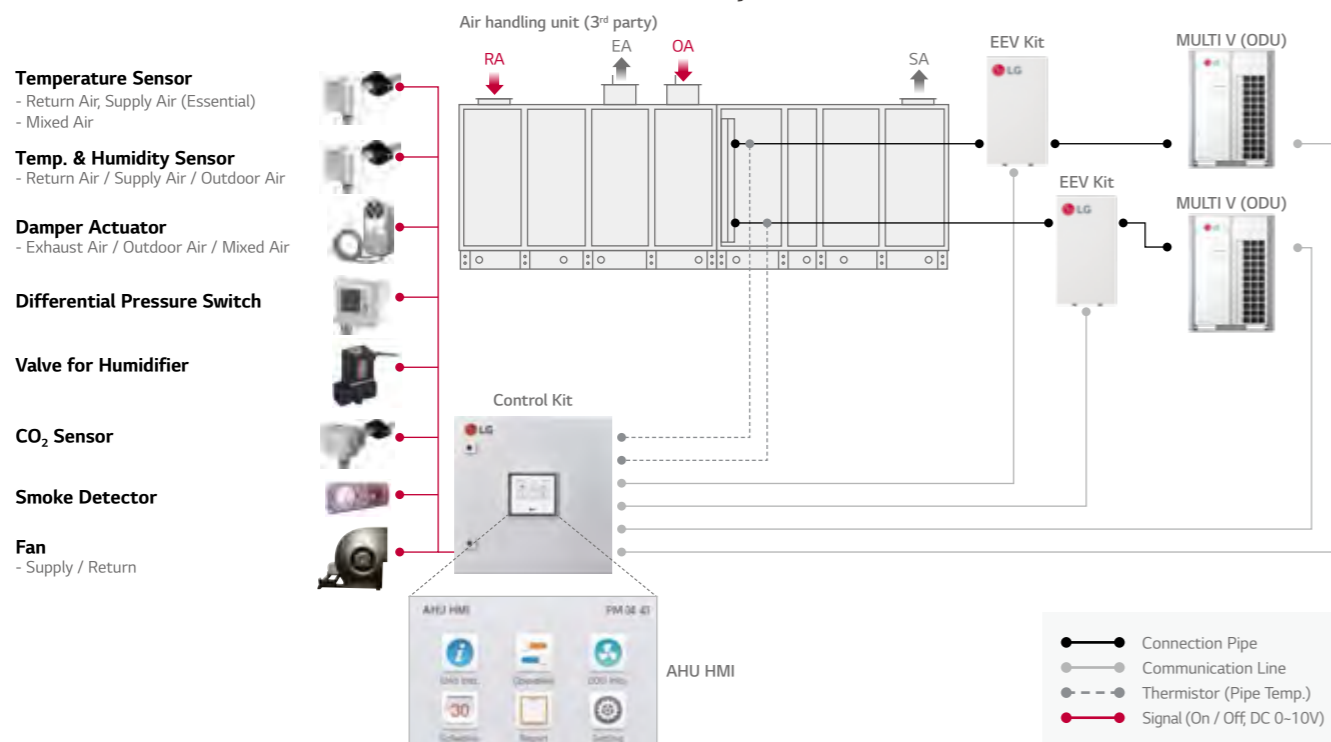

WATER COMMUNICATION MODULE

PAHCMW000


This module is intended to connect 3rd party plate heat exchanger to LG outdoor unit with the ability to control water temperature from 3rd party DDC or LG remote controller.




Overview

Interlocking with 3rd parties can make various solution with LG MULTI V outdoor unit.

1. EEV
2. Solenoid Valve (NC)
3. Non-Return Valve
4. FS : Flow Switch
5. TT : DHW Temperature Transmitter

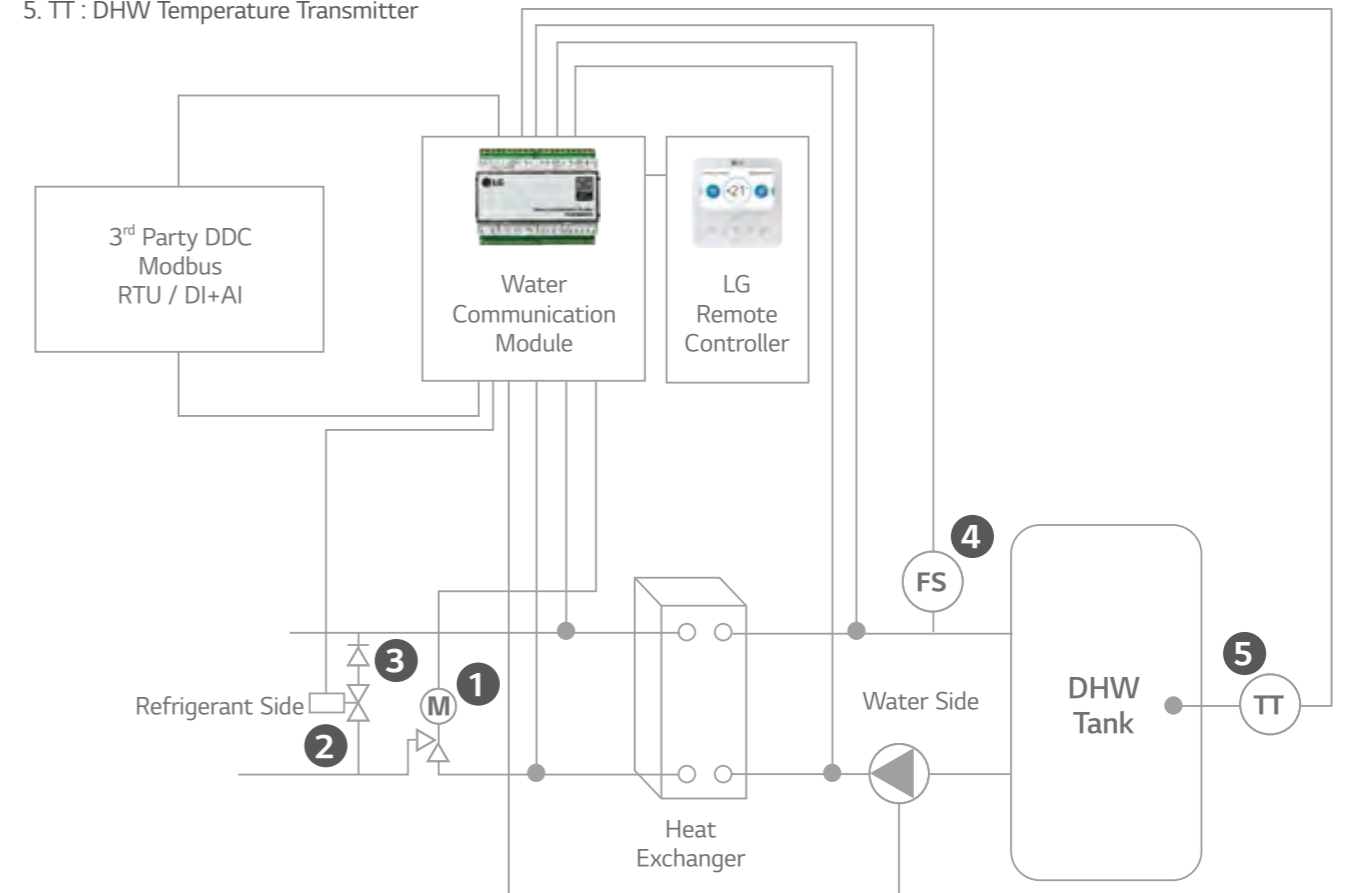

• 3rd party solenoid, non-return valve, heat exchanger, flow switch and DHW temperature transmitter (Optional) must be purchased separately. (Field supplied items)



WATER COMMUNICATION MODULE

Features & Benefits

Interlocking with 3rd parties can make various solution with LG MULTI V outdoor unit.

Contents	Connection Port	Function	
RS485	CH1 (A+ / B-)	Module Comm. Port	Communication Port Modbus
	CH2 (A+ / B-)	IDU Comm. Port	Communication with MULTI V Outdoor
UNIVERSAL INPUT (Cooling / Heating Setting)	UI1	Flow Switch	Flow Switch Input by 3 rd party
	UI2	0 ~ 10V Set Temp.	Target Temp. Setting
	UI3	Cooling Thermostat Signal	Thermostat Cooling Signal
	UI4	Heating Thermostat Signal	Thermostat Heating Signal
UNIVERSAL INPUT (DHW Only)	UI1	Flow Switch	Flow Switch Input by 3 rd party
	UI2	0-10V Set Temp.	Target Temp. Setting
	UI3	DHW Temperature Transmitter 0 ~ 10V	Measured Water Temp. Input by 3 rd party 0 ~ 10 V sensor
	UI4	DHW Thermostat Signal	DHW Heating Signal
NTC	RI1	Water Inlet Sensor	PHEX Water Inlet Sensor
	RI2	Water Outlet Sensor	PHEX Water Outlet Sensor
REMO	+12V / SIG / GND	LG Remote Controller	-
SINGLE	Reserved	-	-
DIGITAL OUTPUT	DO1	Defrost / Mode	Output for defrost signal and / or cool mode
	DO2	Pump	Output signal for pump on / off
	DO3	Bypass	Output signal for PHEX Bypass Valve
NTC	RI3	Thermistor Pipe In	PHEX Ref. Inlet Pipe Sensor
	RI4	Thermistor Pipe Out	PHEX Ref. Outlet Pipe Sensor
EEV	+12V / 1 / 2 / 3 / 4	Expansion Valve	EEV Control

Compatibility & Accessory

EEV (LG MODEL)

Model	Capacity (kW)		PAHCMW000
	Min.	Max.	
PAEEVC000	3.6	28	HP / HR
PRLK048A0	3.6	28	HP / HR
PRLK096A0	28.1	56	HP

Note : Water communication module can accept plate heat exchangers from 3, 6 to 112 kW for combination with MULTI V Outdoor units.

LG Controllers

Controller	Individual Controller	Centralized Controller		Dry Contact
	Heating Standard III	AC EZ Touch	AC smart 5	
	PREMTW101	PACEZA000	PACSSA000	PDRYCB000

Specification for Field supply item

- The 3rd party can select the for best usable version

Solenoid valve for Bypass

Capacity (kW)		EEV type	System	Kv Value of solenoid and Non-Return Valve	Pipe size
Min.	Max.				
3.6	28	PAEEVC000	HP / HR	0.95	3 / 8" / 9.52mm
		PRLK048A0			
28	56	PRLK096A0	HP	1.9	1 / 2" / 12.7mm

Flow switch


- The nominal flow and cut of flow can be calculated using the values below.


Controller	Nominal Flow	Flow switch Cut off
L / min*kW	3.29	1.23

* Example : ODU nominal Cooling Capacity 28 kW,
28 x 3.29 = 92.12 L / min. nominal flow,
28 x 1.23 = 34.44 L / min. flow switch cut off

Installation Scene with Contact Connection

Contact signal + DHW Only Setting

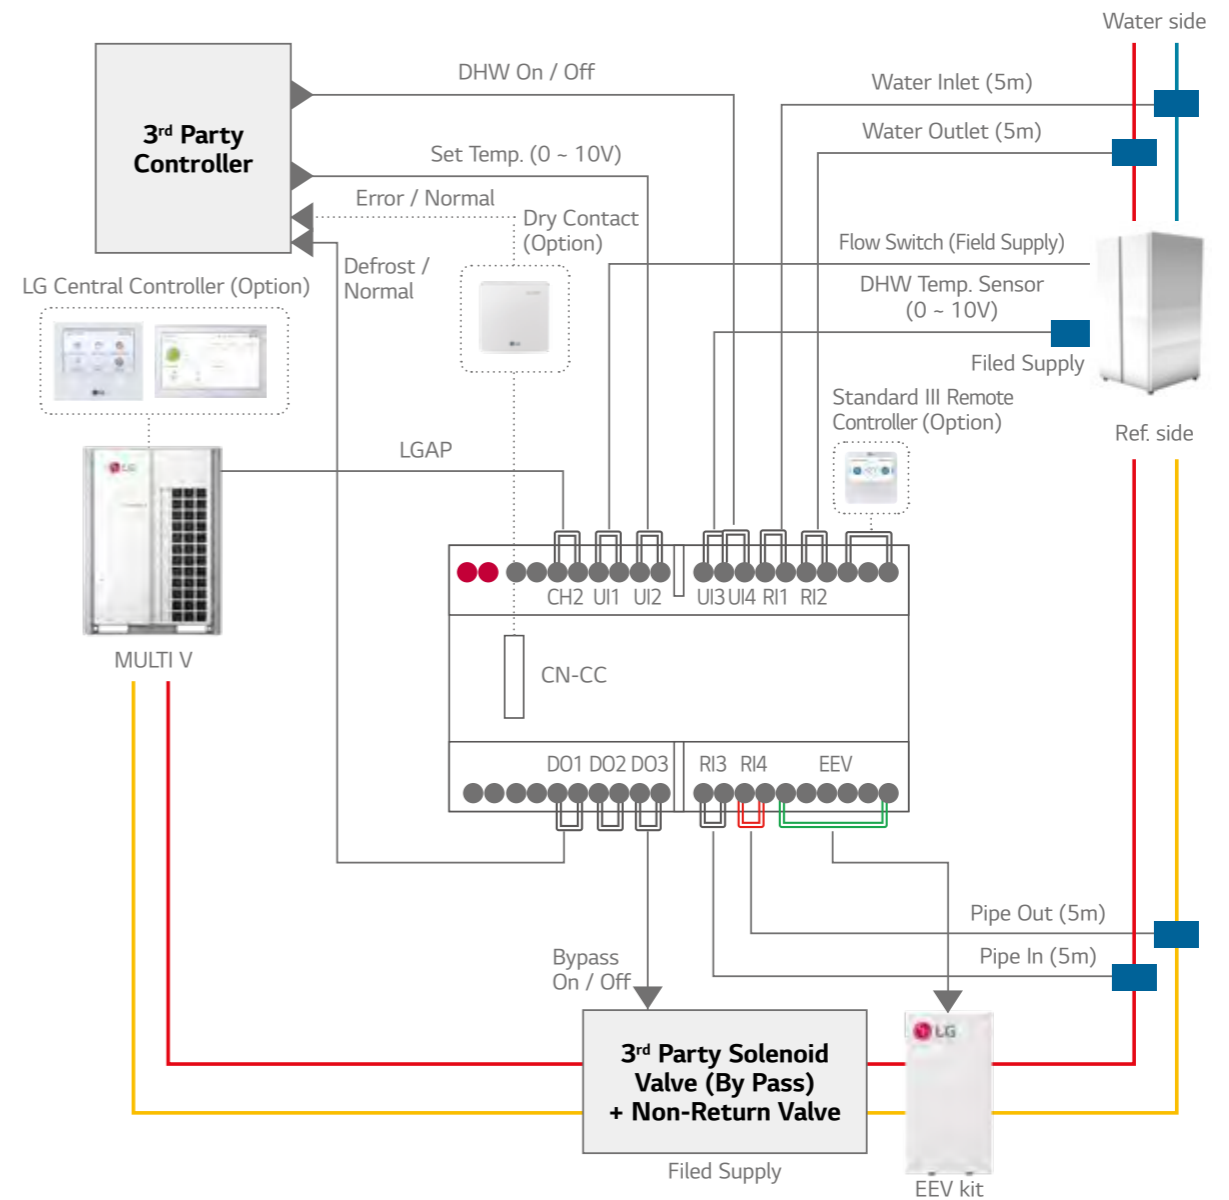




WATER COMMUNICATION MODULE

Installation Scene with Contact Connection


Contact signal + Heating / Cooling Setting

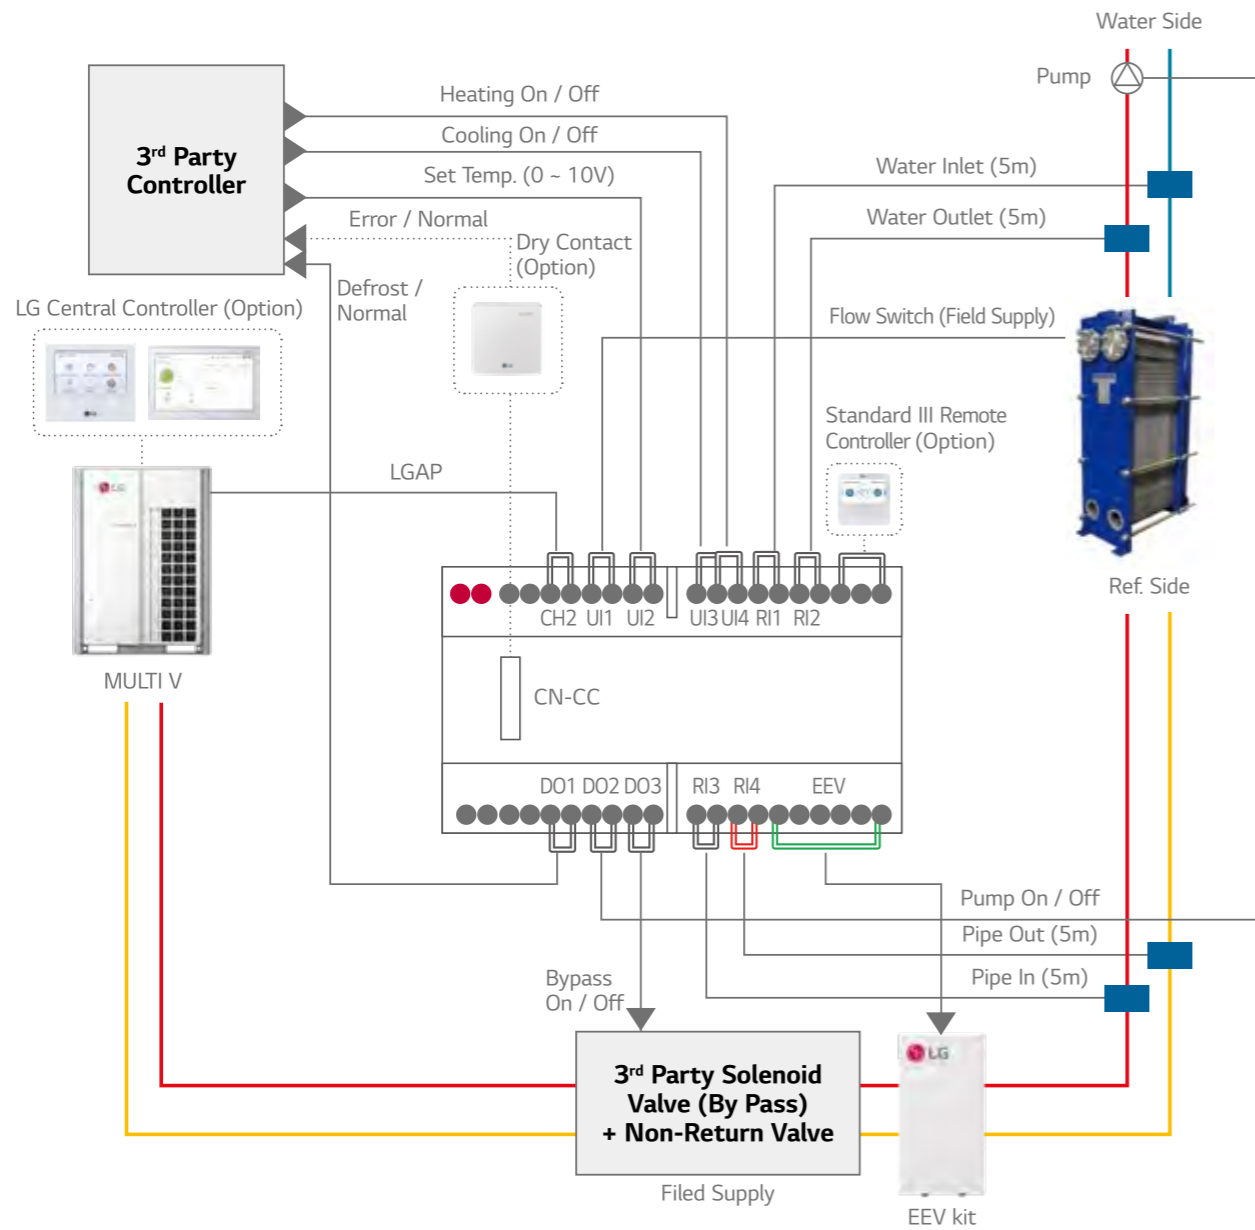


※ In case of Contact control, LG controllers can only support monitoring functions.

Installation Scene with Modbus / LG Control (Optional) Connection

Modbus + DHW Only Setting

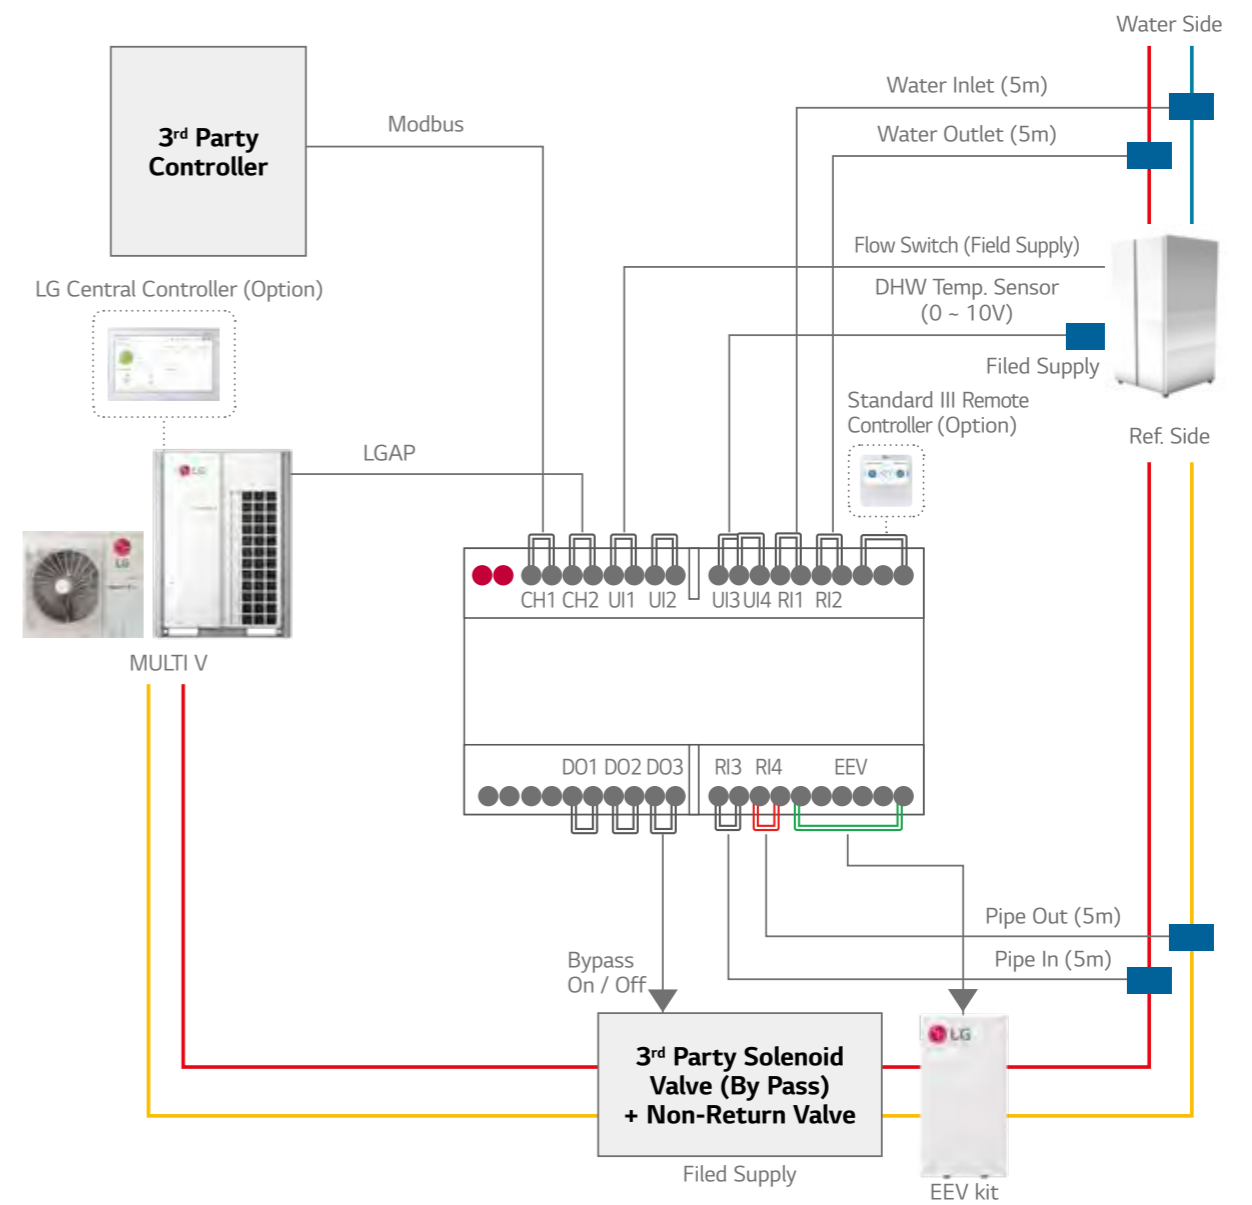




WATER COMMUNICATION MODULE

Installation Scene with Modbus / LG Control (Optional) Connection

Modbus + Heating / Cooling Setting

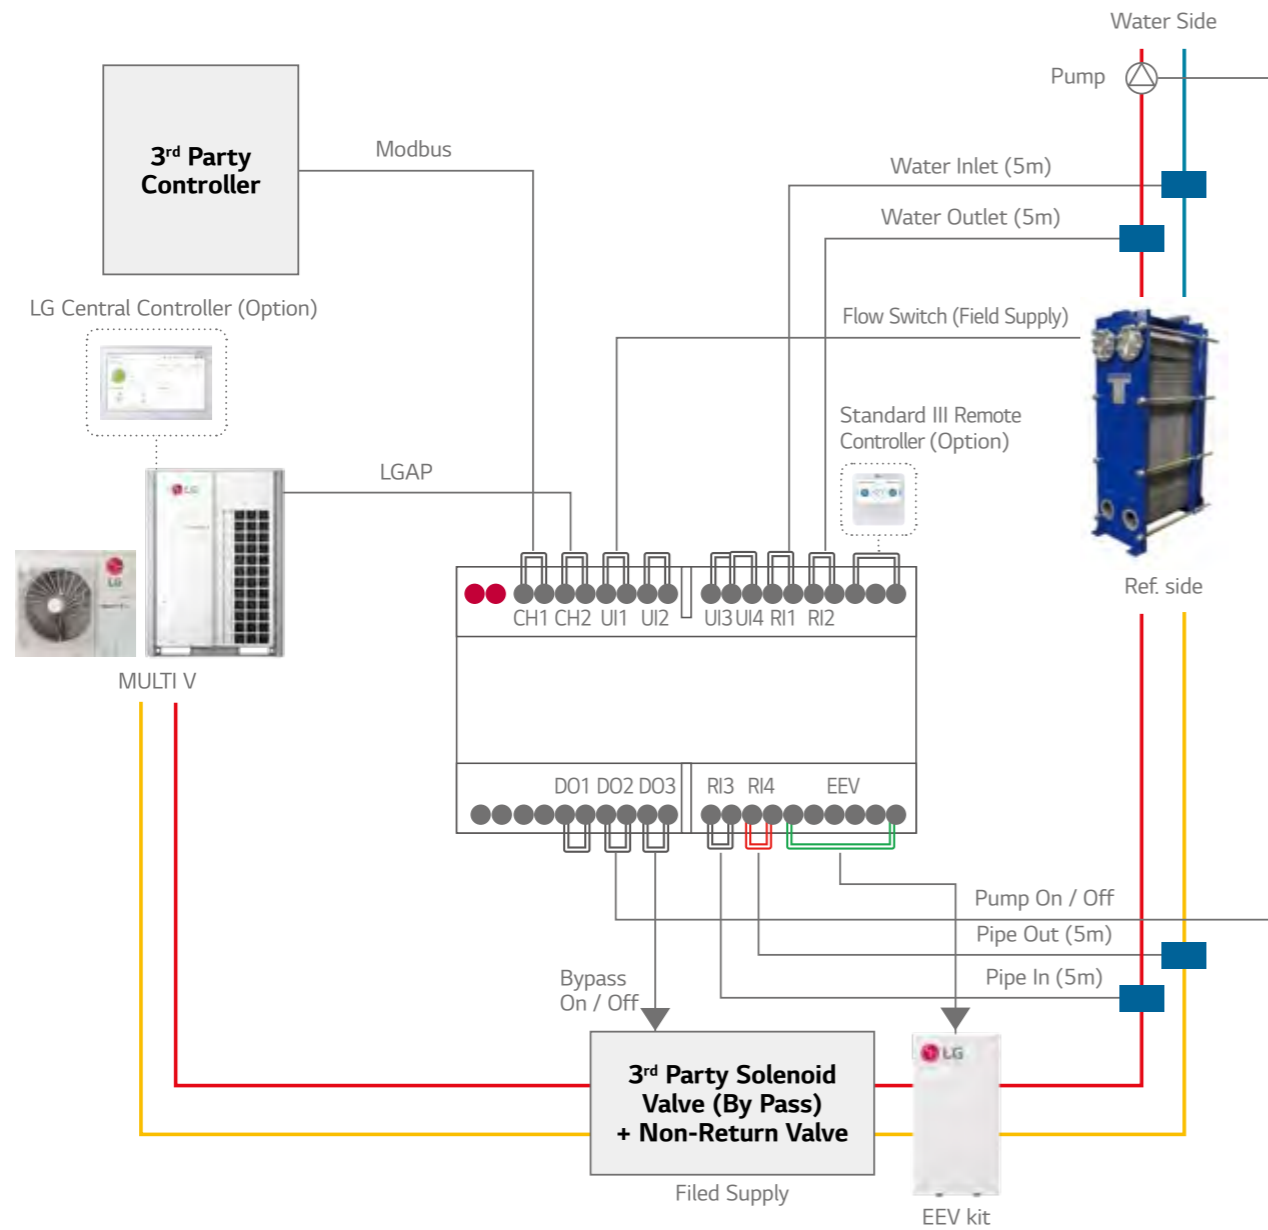

PROPOSAL CASE



HOTEL CONTROL SOLUTION



Guest Room

Air conditioner automatically switches off when guests depart

Integrated control of air conditioner with the hotel room controller

Air conditioner can be controlled with existing hotel thermostat

Prioritizes guest safety with refrigerant leak detection

Reception

Air conditioner control in conjunction with check-in or check out

Public Areas

Centralized management of the public areas

Design Proposal

Guest Room				Lobby
<p>The air conditioner automatically turns off when guests leave</p> <p>PDRYCB400 2 contact point</p> <p>Input</p> <ul style="list-style-type: none"> • Operation On / Off <p>Output</p> <ul style="list-style-type: none"> • Operation On / Off status • Error alarm 	<p>Integrated control of air conditioner with the hotel room controller</p> <p>PDRYCB500 Modbus RTU (9,600bps)</p> <p>Function</p> <ul style="list-style-type: none"> • Operation • Indoor temperature • Error alarm • Set run mode • Set temperature • Set fan speed 	<p>Control with existing hotel thermostat</p> <p>PDRYCB300 PDRYCB320* 8 contact point</p> <p>Input</p> <ul style="list-style-type: none"> • Universal Input* • Operation On / Off • Thermo On / Off • Operation mode (Fan / Heat / Cool) • Fan speed (Low / Middle / High) <p>Output</p> <ul style="list-style-type: none"> • Operation On / Off status • Error alarm <p><small>* Available from April 2020</small></p>	<p>Guest safety is the first priority</p> <p>PRLDNVSO Refrigerant leakage detector • 6,000ppm</p> <p>PREMTB100 Wired remote controller</p> <ul style="list-style-type: none"> • 4.3 inch color LCD • Touch button 	<p>Air conditioner control in conjunction with check-in or check out</p> <p>PACS5A000 AC Smart 5</p> <ul style="list-style-type: none"> • BMS Integration (BACnet IP, Modbus TCP) <p>PACP5A000 ACP 5</p> <ul style="list-style-type: none"> • BMS Integration (BACnet IP, Modbus TCP)



SHOPPING MALL CONTROL SOLUTION



Retail

Proportionally distribute and manage the power consumption by tenants

Real-time system issue detection and alert

Maintenance Office

Reduces energy by checking operational trends

Atrium

Integrated management of AHU applied to large spaces

Chiller and VRF integrated control

Design Proposal

Retail	Maintenance Office	Atrium		
<p>Proportionally distribute and manage power consumption by the tenant</p> <p>PPWRDB000 PDI Standard (2 ports)</p> <ul style="list-style-type: none"> • Max. 128 IDU <p>PQNUD1S40 PDI Premium (8 ports)</p> <ul style="list-style-type: none"> • Max. 128 IDU 	<p>Fast problem detection and alarms</p> <p>PACS5A000 AC Smart 5</p> <ul style="list-style-type: none"> • BMS Integration (BACnet IP, Modbus TCP) <p>PACP5A000 ACP 5</p> <ul style="list-style-type: none"> • BMS Integration (BACnet IP, Modbus TCP) 	<p>Reduces energy by checking operational trends</p> <p>PAHMR000 AHU Comm.Kit</p> <ul style="list-style-type: none"> • Return air <p>PAHMS000 AHU Comm.Kit</p> <ul style="list-style-type: none"> • Discharge air 	<p>Integrated management of AHU applied to large spaces</p> <p>PAHMR000 AHU Comm.Kit</p> <ul style="list-style-type: none"> • Return air <p>PAHMS000 AHU Comm.Kit</p> <ul style="list-style-type: none"> • Discharge air 	<p>Chiller and VRF integrated control</p> <p>PCHLLN000 Chiller Option Kit</p> <p>+ PACP5A000 ACP 5 + PACS5A000 AC Smart 5</p>



HOSPITAL CONTROL SOLUTION



Hospital Ward

- Proper airflow management for patients
- Monitor the comfort level for each hospital ward
- Control fan speed and air volume

Service Zone

- Energy savings based on flexible scheduling

Lobby


- Centralized management of AHU for large spaces

Design Proposal

Hospital Ward			Service Zone	Lobby
Proper airflow management for patients	Monitor the comfort level for each hospital ward	External device interlock control	Energy savings based on flexible scheduling	Centralized management of AHU for large space
PTVSM40 Human detection sensor	PACS5A000 AC Smart 5	PDRYCB400 2 contact point	PACS5A000 AC Smart 5	PAHCMR000 AHU Comm.Kit
		Input • Operation On / Off		
PREMTB100 Wired remote controller	PACP5A000 ACP 5	Output • Operation On / Off status • Error alarm	PACP5A000 ACP 5	PAHCMS000 AHU Comm.Kit
• 4.3 inch color LCD • Touch button	• BMS Integration (BACnet IP, Modbus TCP)		• BMS Integration (BACnet IP, Modbus TCP)	• Return air
			• BMS Integration (BACnet IP, Modbus TCP)	• Discharge air



ACADEMIC INSTITUTION CONTROL SOLUTION

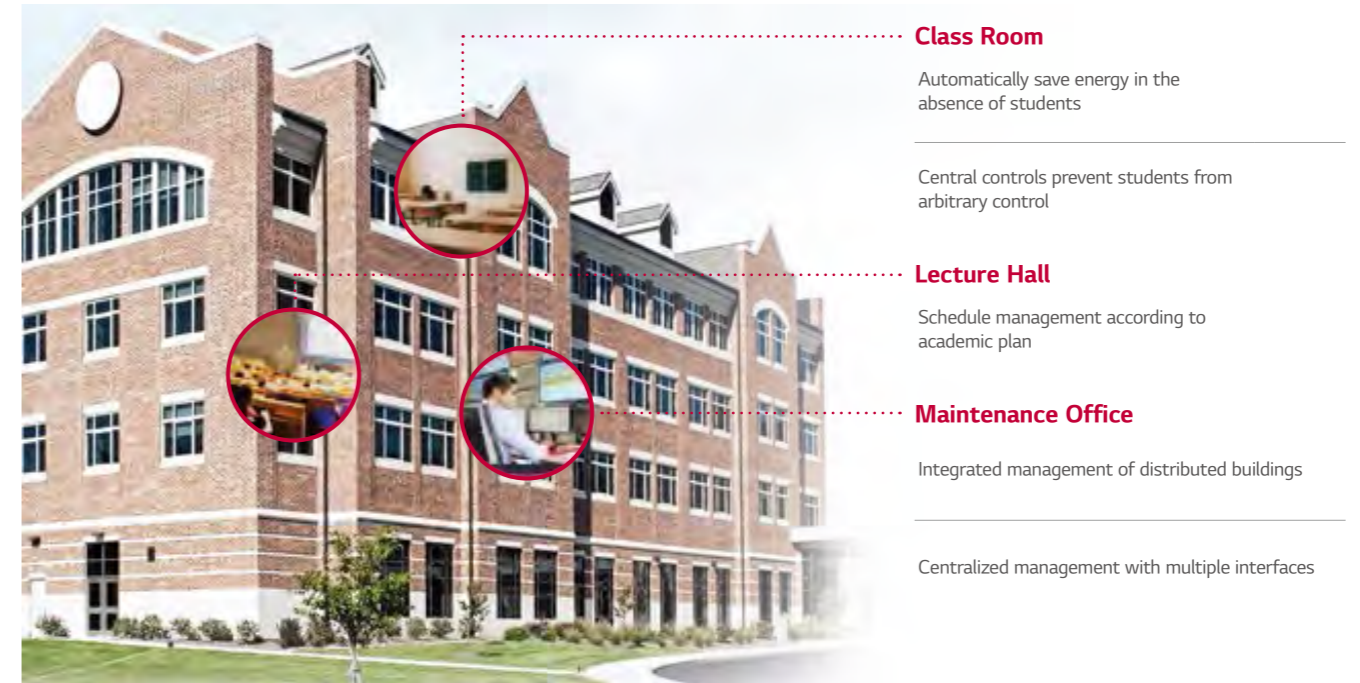

Class Room

- Automatically save energy in the absence of students

- Central controls prevent students from arbitrary control

Lecture Hall

- Schedule management according to academic plan

Maintenance Office

- Integrated management of distributed buildings

- Centralized management with multiple interfaces

Design Proposal

Class Room	Lecture Hall	Maintenance Office
Automatically save energy in the absence of students	Central controls prevent students from arbitrary control	Schedule management according to academic plan
PTVSM40 Human detection sensor	PACS5A000 AC Smart 5	PACP5A000 ACP 5
PREMTB100 Wired remote controller	PACM5A000 AC Manager 5	PACM5A000 AC Manager 5
• 4.3 inch color LCD • Touch button	• BMS Integration (BACnet IP, Modbus TCP)	• BMS Integration (BACnet IP, Modbus TCP)



OFFICE CONTROL SOLUTION



Maintenance Office

Energy savings and management throughout the building

Integrated management of HVAC with BMS system

Reduce costs by replacing BMS

Office Room

Reasonable power distribution to tenants

Server Room

24-hour backup management

Meeting Room

Energy savings based on occupancy detection

Design Proposal

Maintenance Office	Office Room	Server Room	Meeting Room
<p>Energy savings and management throughout the building</p> <p>Target Forecasting</p>	<p>Reasonable power distribution to tenants</p> <p>WHM (Watt-Hour Meter) Pulse signal Power 100 kWh PDI</p>	<p>Main equipment 24 hours back up management</p> <p>24 hours</p>	<p>Energy savings based on occupancy detection</p> <p>Human detection sensor</p>
<p>Integrated management of HVAC with BMS system</p> <p>BMS Protocol BMS System</p>	<p>Reduce costs by replacing BMS</p> <p>Pump Lighting Fan Sensor</p>	<p>AC Smart 5</p> <p>PACS5A000 AC Smart 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) 	<p>Human detection sensor</p> <p>PTV5MA0 Human detection sensor</p>
<p>AC Smart 5</p> <p>PACP5A000 ACP 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) 	<p>LonWorks gateway</p> <p>PLNWKB000 LonWorks gateway</p>	<p>AC IO Module</p> <p>PEXPMB000 ACS IO Module</p>	<p>Human detection sensor</p> <p>PQNUD1S40 PDI Premium (8 ports)</p> <ul style="list-style-type: none"> Max. 128 IDU
<p>Modbus RTU gateway</p> <p>PMBUSB00A Modbus RTU gateway</p>	<p>AC IO Module</p> <p>PEXPM300 PEXPM200 PEXPM100 ACU IO Module</p>	<p>AC Smart 5</p> <p>PAC5A000 ACP 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) 	<p>Wired remote controller</p> <p>PREMTB100 Wired remote controller</p> <ul style="list-style-type: none"> 4.3 inch color LCD Touch button



RESIDENTIAL CONTROL SOLUTION



Home

Anytime, anywhere air conditioner control and access

Integrate systems for smart connectivity throughout

Bed Room

Use a familiar residential thermostat

Simple interlocking control by remote control

Apartment / Residence

Stable system operation

Design Proposal

Home	Bed Room	Apartment
<p>Control your home air conditioner anytime, anywhere</p>	<p>Use a familiar residential thermostat</p>	<p>Stable system operation when indoor unit power is lost</p>
<p>Build a Smart house</p>	<p>Simple interlocking control by remote control</p>	<p>Independent power module</p>
<p>Wi-Fi modem</p> <p>PWFMD200 Wi-Fi modem</p>	<p>Wired remote controller</p> <p>PDRYCB300 PDRYCB320* 8 contact point</p>	<p>Independent power module</p> <p>PRIPO Independent power module</p> <ul style="list-style-type: none"> EEV full close function
<p>Function</p> <ul style="list-style-type: none"> On / Off Fan speed Operation mode Vane control Reservation (Sleep, Weekly On / Off) Error check 	<p>Input</p> <ul style="list-style-type: none"> Universal Input* Operation On / Off Thermo On / Off Operation mode (Fan / Heat / Cool) Fan speed (Low / Middle / High) <p>Output</p> <ul style="list-style-type: none"> Operation On / Off status Error alarm <p>* Available from April 2020</p>	

스티커 용지 후면

Individual Control



Centralized Control



Integration Device



